

**PROPOSED ESTABLISHMENT OF THE RUSTENBURG  
STRENGTHENING PHASE 2, MARANG B 400/132KV AND ±2KM, 400 KV  
POWER LINE FROM THE EXISTING BIGHORN-MARANG OR MEDUPI-  
MARANG OR MIDAS-MARANG 400KV POWER LINES**

***VISUAL IMPACT ASSESSMENT***

***PREPARED FOR:***



Dynamic Integrated Geohydro  
Environmental Services cc

**Dynamic Integrated Geohydro Environmental Services (DIGES)**

CONTACT PERSON: BRENDA MAKANZA

CONTACT NO.: +27 (0)11 312 2878

***ON BEHALF OF:***



Eskom Transmission

PO Box 1091

Johannesburg

2157

Tel (011) 800-2465

Fax (011) 800-3917

***PREPARED BY:***

**AXIS LANDSCAPE ARCHITECTS (CC)**

226 Odendaal Street

Meyerspark

Pretoria

0184



**FEBRUARY 2014**

**AXIS REF: RUS2014**

---

**Copyright Warning-**

Copyright in all text and other matter, including the manner of presentation, is the exclusive property of the author. It is a criminal offence to reproduce and/or use, without written consent, any matter, technical procedure and/or technique contained in this document. Criminal and civil proceedings will be taken as a matter of strict routine against any person and/or institution infringing the copyright of the author and/or proprietors.

---

## **EXECUTIVE SUMMARY**

Dynamic Integrated Geohydro Environmental Services (DIGES) was appointed by Eskom Holdings Limited Transmission Division, as the independent environmental consultant to undertake the Environmental Impact Assessment (EIA) for the proposed establishment of the Marang B 400/132kV and  $\pm 2$ km, 400 kV power line from the existing Bighorn-Marang or Medupi-Marang or Midas-Marang 400kV power lines, Rustenburg, North West Province.

Axis Landscape Architecture cc was appointed by DIGES as a sub-consultant to complete a Visual Impact Assessment. This Visual Impact Assessment (VIA) is a specialist study that forms part of the EIA and addresses the visual affects of the proposed transmission line on the receiving environment.

Three alternative positions for the Marang B 400/132kV Substation have been proposed and a  $\pm 2$  km, 400kV power line from the existing Bighorn-Marang or Medupi-Marang 400 kV power line.

The study area contains the extent of the proposed positions and line and includes an approximate 5 km buffer area around the alignment.

## **PROJECT DESCRIPTION**

The following project components will occur during the construction and operational phases of the project and are identified as elements that may cause a potential landscape and/or visual impact:

- Construction camps and lay-down yards;
- Access roads;
- Substation; and
- Transmission line.

Of the four project components, the towers of the transmission line and the substation are expected to cause the greatest impacts.

## **DESCRIPTION OF THE AFFECTED ENVIRONMENT**

The study area consists of cultivated, residential areas, subsistence farming and mining. Extensive mining is scattered through the study area. Residential development activities are more intense from the central to southern side of the study area.

The residential suburbs are classified under one landscape type due to the near identical character. The residential areas are partially vegetated and consist mostly of single storey residential units.

The network of streets and roads as well as the street trees frames each residential block that creates a strong regimented appearance to the study area. Generally, the land use is residential, interspersed with retail developments along main roads

According to Low and Rebelo (1996), the site is classified as 'Mixed Bushveld'. It is characterised from a dense, short bushveld to a rather open tree savanna.

## **FINDINGS AND RECOMMENDATIONS**

### **LANDSCAPE CHARACTER SENSITIVITY**

The sensitivity of the landscape character is an indication of "...the degree to which a particular landscape can accommodate change from a particular development, without detrimental effects on its character" (GLVIA, 2002).

The majority of the study area is considered to have a *moderately low* landscape character sensitivity due to the relative disturbed landscape. Moderate terrain variability occurs through of the study area where a moderately low VAC can be expected. Generally the vegetation varies from medium to low shrubs which will provide minimal visual screening for the proposed substation and transmission line.

The landscape character is considered moderately susceptible to change, whether it is a low intensity change over an extensive area or an acute change over a limited area. Generally, the vegetation occurring in the study area is resilient and recovers very quick from surface disturbances.

Previous human induced activities and interventions have negatively impacted the original landscape character of the different landscape types. In this case the mines and existing infrastructure, including transmission lines, roads, etc., can be classified as landscape disturbances and elements that cause a reduction in the condition of the affected landscape type and detrimentally affect the quality of the visual resource.

### **SIGNIFICANCE OF LANDSCAPE IMPACTS**

Landscape impacts are alterations to the fabric, character, visual quality and/or visual value which will either positively or negatively affect the landscape character. During the construction and operational phases, the project components are expected to impact on the landscape character of the landscape types it traverses.

The following table provides a summary of the anticipated landscape impacts that may occur as a result of the construction of the transmission line.

Activity	Nature of Impact	Extent of Impact	Duration of Impact	Severity of Impact	Probability of Impact	Significance without Mitigation	Significance with Mitigation	Level of Confidence
<b>Construction phase</b>								
Marang B Site 1	Negative – Impacting on the visual quality of the landscape due to the presence of foreign elements and a loss of vegetation cover.	Local	Permanent if not mitigated	Low	Definite	Low	Low	High
Marang B Site 2				Moderate	Definite	Moderate	Low	High
Marang B Site 3				Low	Definite	Low	Low	High
400kV loop-in-loop-out power line				Low	Definite	Low	Low	High
<b>Operational phase</b>								
Marang B Site 1	Negative – Impacting on the visual quality of the landscape due to the presence of a substation and transmission line.	Local	Permanent	Low	Definite	Low	Low	High
Marang B Site 2				Moderate	Definite	Moderate	Low	High
Marang B Site 3				Low	Definite	Low	Low	High
400kV loop-in-loop-out power line				Low	Definite	Low	Low	High

### Construction phase

The activities that are expected to cause landscape impacts and that are associated with the construction phase, are the establishment of the construction camp, construction of access roads and the clearance of the servitude. These activities will create surface disturbances which will result in the removal of vegetation and the exposure of the underlying soil.

The extent of the disturbances will generally affect a big footprint area. Access road to the substation is expected to be a tar or dirt road which will create disturbance. During construction, the area around the substation will be disturbed. Vegetation will be trampled and may take months to recover. The size and location of the substation will play a major role in the severity of the landscape impact.

The construction camp and lay-down yard is anticipated to disturb a much smaller area. Due to a lack of technical information, two options are considered namely; the location of construction camp in remote, virgin land, or in/adjacent existing settlements. The initial presence of a construction camp in an undeveloped landscape will cause a temporary and localised alteration to the landscape character. A construction camp located in or adjacent to an existing town or settlement will be easily associated with the town and therefore the presence of the town, mitigates the impact. The mitigating result is most effective, the bigger the town or settlement is.

Servitudes of lines entering and exiting the substation will generally be cleared of higher growing and dense vegetation to reduce biomass that may cause a fire hazard if ignited. The complete removal of high growing vegetation and shrubs will result in disturbed areas of exposed soil and difference in texture.

The exposed soil and change in texture will contrast with the intact vegetation around the disturbance footprint and servitudes.

### Operational phase

Surface disturbances created during construction may remain for an extended period during the operational phase. These are seen as residual affects carried forward from the construction phase and can be completely or substantially mitigated if treated appropriately during the construction phase.

An additional impact will be caused as a result of the presence of the completed substation, i.e. that of the evenly spaced towers of the lines, buildings and structures. The industrial character and the near monumental vertical scale of the towers will severely contrast with the uniform landscape character that prevails through most of the study area.

### **VIEWER SENSITIVITY**

Within the receiving environment, specific viewers (visual receptors) experience different views of the visual resource and value it differently. They will be affected because of alterations to their views due to the proposed project. The visual receptors are grouped according to their similarities. The visual receptors included in this study are:

- Residents;
- Tourists; and
- Motorists.

To determine visual receptor sensitivity a, commonly used rating system is utilised. This is a generic classification of visual receptors and enables the visual impact specialist to establish a logical and consistent visual receptor sensitivity rating for viewers who are involved in different activities without engaging in extensive public surveys. The sensitivity of the identified visual receptors is discussed in Section 5.2.1.

### **SIGNIFICANCE OF VISUAL IMPACTS**

Empirical research indicates that the visibility of a transmission tower, and hence the severity of visual impact, decreases as the distance between the observer and the tower increases. The landscape type, through which the transmission line crosses, can mitigate the severity of visual impact through topographical or vegetative screening. Bishop *et al* (1988) noticed that in some cases the tower may dominate the view for example, silhouetted against the skyline, or in some cases be absorbed in the landscape. A complex landscape setting with a diverse land cover and topographical variation has the ability to decrease the severity of visual impact more than a mundane landscape (Bishop *et al*, 1985).

The following tables summarise the visual impacts on residents, tourists and motorists.

## VISUAL IMPACTS ON RESIDENTS

Activity	Nature of Impact	Extent of Impact	Duration of Impact	Severity of Impact	Probability of Impact	Significance without Mitigation	Significance with Mitigation	Level of Confidence
<b>Construction phase</b>								
Marang B Site 1	Negative – Construction camp and lay-down yards may cause unsightly views.	Local	Temporary	Moderate	Probable	Low	Low	High
Marang B Site 2				Low	Definite	Low	Low	High
Marang B Site 3				Moderate	Definite	Low	Low	High
400kV loop-in-loop-out power line				Moderate	Definite	Moderate	Low	High
<b>Operational phase</b>								
Marang B Site 1	Negative – The presence of a substation and transmission line intrudes on existing views and spoils the open views of the landscape.	Local	Permanent	Low	Definite	Low	Low	High
Marang B Site 2				Low	Definite	Low	Low	High
Marang B Site 3				Low	Definite	Low	Low	High
400kV loop-in-loop-out power line				Low	Definite	Low	Low	High

Generally, the study area is moderately populated, especially the residential developments and farming communities. These communities are normally situated along main transportation routes or adjacent to rivers or water resources.

The topography provides moderate VAC to visually screen the components of the project and it can therefore be stated that the general visibility of the project will be low.

### Construction phase

During the construction phase, unsightly views may be created by the presence of the construction camp and the lay-down yard. The duration of the potential visual impact will be temporary which will result in an anticipated *low* significance of visual impact for all alternatives. The visual exposure to the construction activity will initially be limited and only local residents will experience views of the site preparation activity. As the structures increase in scale and height, the ZVI increases, resulting in a greater number of affected viewers and a subsequent increase in visual exposure.

The visual intrusion will progressively increase in severity as the concentration of power lines increases to the substation. The cleared site, construction camp and material lay-down yard will appear unsightly and out of character. Large scale construction elements such as cranes, will be highly visible and increase awareness of the construction activity over a considerable area. The visual intrusion caused during the construction stage will be high, but will be temporary in nature.

### Operational phase

The residents of the informal settlements next to the substation and power lines may experience a high degree of visual intrusion due to their proximity to all the Alternatives. These residents are within 5 km and in some instances within 1 km from the proposed locations. This is considered the zone of highest visibility in which the highest degree of visual intrusion can be expected.

## VISUAL IMPACTS ON TOURISTS

Activity	Nature of Impact	Extent of Impact	Duration of Impact	Severity of Impact	Probability of Impact	Significance without Mitigation	Significance with Mitigation	Level of Confidence
<b>Construction phase</b>								
Marang B Site 1	Negative – Construction camp and lay-down yards may cause unsightly views.	At a number of point locations	Temporary	Low	Low Probability	Low	Low	High
Marang B Site 2				Low	Low Probability	Low	Low	High
Marang B Site 3				Low	Low Probability	Low	Low	High
400kV loop-in-loop-out power line				Low	Low Probability	Low	Low	High
<b>Operational phase</b>								
Marang B Site 1	Negative – The presence of a substation and transmission line intrudes on existing views and spoils the open views of the landscape.	Local	Permanent	Low	Low Probability	Low	Low	High
Marang B Site 2				Low	Low Probability	Low	Low	High
Marang B Site 3				Low	Low Probability	Low	Low	High
400kV loop-in-loop-out power line				Low	Low Probability	Low	Low	High

The entire study area is considered to have moderately-low tourism potential.

### Construction phase

The temporary duration of the construction phase is not expected to cause major visual impacts. The location and size of the construction camp and lay-down yard will be crucial in regulating the impact. Detail information is not available and it is anticipated that the visual impact will occur localised and that a small number of tourists will be adversely affected by these project components during construction.

Their exposure to possible unsightly views of the construction camp and the associated activity will however be minimal and localised.

The potential visual impact on tourists during the construction phase of the proposed project can be mitigated with relative ease. The greatest factor to consider is the location of the construction camp out of potential views that may be experienced from scenic routes or tourist hotspots.

### Operational phase

It can be concluded that all the alternatives will cause minimal visual intrusion for tourists travelling through the study area due to the low volume of tourists that will be travelling there. It is not visible from the main routes tourists travel.

## VISUAL IMPACTS ON MOTORISTS

Activity	Nature of Impact	Extent of Impact	Duration of Impact	Severity of Impact	Probability of Impact	Significance without Mitigation	Significance with Mitigation	Level of Confidence
<b>Construction phase</b>								
Marang B Site 1	Negative – Construction camp and lay-down yards may cause unsightly views.	At a number of point locations	Intermittent	Low	Probable	Low	Low	High
Marang B Site 2				Low	Probable	Low	Low	High
Marang B Site 3				Low	Probable	Low	Low	High
400kV loop-in-loop-out power line				Low	Probable	Low	Low	High
<b>Operational phase</b>								
Marang B Site 1	Negative – The presence of a substation and transmission line intrudes on existing views and spoils the open views of the landscape.	Local	Intermittent	Low	Definite	Low	Low	High
Marang B Site 2				Low	Definite	Low	Low	High
Marang B Site 3				Low	Definite	Low	Low	High
400kV loop-in-loop-out power line				Low	Definite	Low	Low	High

The major route in the study area is the R510 connecting the mines, towns, residential area and informal settlements. The secondary and tertiary roads are a loose network of gravel roads linking smaller settlements and mines. These road networks in the study area carries a much lower volume of motorists. Their duration of views will be temporary and it is expected that the visual intrusion that they will experience will be low. For this report only motorists using the main routes will be considered as there are many countless smaller roads within the study area.

### Construction phase

The potential visual impact that may be experienced by motorists during the construction phase is considered to be minimal. Limited information is available and the location and size of the construction camp and lay-down yard that are essential for accurately assessing the visual impact. It is anticipated that views of the construction camp and lay-down yard of all the Alternatives may be visible from a local road.

The presence of the construction camp and lay-down yard may create unsightly views. Motorists' visual exposure to the impact will be brief and the severity of visual impact will be *low*. The significance of potential visual impact is expected to be *low*.

### Operational phase

The severity and significance of visual impact for the proposed alternatives on motorists will be low. The speed at which motorists travel also has a moderating effect on the severity of the visual impact and further reduces visual exposure.

## RECOMMENDED MITIGATION MEASURES

In most cases, the landscape and visual impacts occurring during the construction phase can be mitigated relatively effectively. Rehabilitation of the disturbed areas will prevent the exposure of soil, which may cause a reduction in the visual quality of the study area. Sensitive positioning of the construction camps and lay-down yards should take advantage of the natural screening capacity of the study area by locating the camps outside of the views of sensitive visual receptors.

## CONCLUSION

The three alternative substation sites for the Marang B 400/132kV Substation and a  $\pm 2$  km, 400kV power line from the existing Bighorn-Marang or Medupi-Marang have been evaluated against international accepted criteria to determine the impact they will have on the landscape character and the viewers that have been identified in the study area.

The three alternative substation sites are rated according to preference by using a three-point rating system in Table 7, one (1) being the most preferred, to three (3) being the least preferred. The preference rating is informed by the impact assessment discussions in Section 5 and the overall performance of each alternative with regards to the impact on the landscape character and the identified viewers.

### Evaluation of alternative alignments

ALTERNATIVES	PREFERENCE RATING
Marang B Site 1	1
Marang B Site 2	3
Marang B Site 3	2

The Marang B Site 1 is regarded as the most preferred alternative. Its location and position in the landscape is considered to cause the least impact on the landscape character due to the reduced sensitivity of the landscape along the servitudes and the local roads.

The impact of the Marang B Site 1 on visual receptors varies between residents, tourists and motorists. The Marang B Site 1 great advantage lies in the less significant landscape and visual impact on motorists and residents as compared to the other alternatives.

## TABLES OF CONTENTS

	Page
<b>EXECUTIVE SUMMARY .....</b>	<b>i</b>
<i>PROJECT DESCRIPTION .....</i>	<i>i</i>
<i>DESCRIPTION OF THE AFFECTED ENVIRONMENT .....</i>	<i>i</i>
<b>FINDINGS AND RECOMMENDATIONS .....</b>	<b>ii</b>
<i>LANDSCAPE CHARACTER SENSITIVITY.....</i>	<i>ii</i>
<i>SIGNIFICANCE OF LANDSCAPE IMPACTS .....</i>	<i>ii</i>
<i>VIEWER SENSITIVITY.....</i>	<i>iv</i>
<i>SIGNIFICANCE OF VISUAL IMPACTS.....</i>	<i>iv</i>
VISUAL IMPACTS ON RESIDENTS .....	v
VISUAL IMPACTS ON TOURISTS .....	vi
VISUAL IMPACTS ON MOTORISTS .....	vii
<i>RECOMMENDED MITIGATION MEASURES .....</i>	<i>vii</i>
<i>CONCLUSION.....</i>	<i>viii</i>
<b>TABLES OF CONTENTS.....</b>	<b>ix</b>
<b>LIST OF FIGURES .....</b>	<b>xi</b>
<b>LIST OF TABLES.....</b>	<b>xi</b>
<b>LIST OF ABBREVIATIONS .....</b>	<b>xii</b>
<b>1. INTRODUCTION.....</b>	<b>1</b>
1.1. <i>BACKGROUND AND BRIEF .....</i>	<i>1</i>
1.2. <i>STUDY AREA.....</i>	<i>1</i>
<b>2. STUDY APPROACH .....</b>	<b>3</b>
2.1. <i>INFORMATION BASE.....</i>	<i>3</i>
2.2. <i>ASSUMPTIONS AND LIMITATIONS.....</i>	<i>3</i>
2.3. <i>LEVEL OF CONFIDENCE.....</i>	<i>3</i>
2.4. <i>METHOD .....</i>	<i>3</i>
<b>3. PROJECT DESCRIPTION.....</b>	<b>4</b>
3.1. <i>OVERVIEW OF DEVELOPMENT .....</i>	<i>4</i>
3.2. <i>PROJECT COMPONENTS AND ACTIVITIES.....</i>	<i>4</i>
3.2.1. CONSTRUCTION CAMPS AND LAY-DOWN YARDS .....	4
3.2.2. ACCESS ROADS.....	4
3.2.3. SUBSTATION.....	4
<b>4. DESCRIPTION OF THE AFFECTED ENVIRONMENT.....</b>	<b>7</b>
4.1. <i>VISUAL RESOURCE .....</i>	<i>7</i>
4.1.1. LANDSCAPE CHARACTER ASSESSMENT .....	7
4.1.2. VISUAL CHARACTER .....	7
4.1.2.1 Visual Quality .....	8
4.1.2.2 Visual absorption capacity .....	8
<b>5. IMPACT ASSESSMENT.....</b>	<b>18</b>

<b>5.1. SIGNIFICANCE OF LANDSCAPE IMPACT .....</b>	<b>18</b>
5.1.1. LANDSCAPE CHARACTER SENSITIVITY .....	18
5.1.2. SEVERITY OF POTENTIAL LANDSCAPE IMPACTS .....	19
<b>5.2. SIGNIFICANCE OF VISUAL IMPACTS .....</b>	<b>21</b>
5.2.1. VIEWER SENSITIVITY .....	21
5.2.1.1 Residents.....	21
5.2.1.2 Tourists .....	21
5.2.1.3 Motorists .....	21
5.2.2. SEVERITY OF POTENTIAL VISUAL IMPACTS.....	21
5.2.2.1 Potential visual impacts on residents.....	23
5.2.2.2 Potential visual impacts on tourists .....	24
5.2.2.3 Potential visual impacts on motorists.....	25
<b>6. RECOMMENDED MITIGATION MEASURES.....</b>	<b>26</b>
<b>6.1. GENERAL .....</b>	<b>26</b>
<b>6.2. ACCESS ROUTES.....</b>	<b>26</b>
<b>6.3. ACCESS ROUTES.....</b>	<b>26</b>
<b>6.4. CLEARED SERVITUDES.....</b>	<b>26</b>
<b>6.5. CONSTRUCTION CAMP AND LAY DOWN YARDS .....</b>	<b>27</b>
<b>7. CONCLUSION.....</b>	<b>27</b>
<b>APPENDIX 1.....</b>	<b>28</b>
<b>LEVEL OF CONFIDENCE.....</b>	<b>34</b>
<b>VISUAL RECEPTOR SENSITIVITY.....</b>	<b>35</b>
<b>REFERENCES .....</b>	<b>36</b>

## LIST OF FIGURES

Figure 1: Locality Plan .....	2
Figure 2: Example of construction camps .....	6
Figure 3: Land cover map of study area.....	10
Figure 4: Landscape character of study area.....	11
Figure 5: Landscape character of study area.....	12
Figure 6: Photo Reference Map .....	13
Figure 7: Photo plate 1 .....	14
Figure 8: Photo plate 2 .....	15
Figure 9: Photo plate 3 .....	16
Figure 10: Photo plate 4 .....	17
Figure 11: Marang B Site 1.....	29
Figure 12: Marang B Site 2.....	30
Figure 13: Marang B Site 3.....	31

## LIST OF TABLES

Table 1: Criteria of Visual Quality (FHWA, 1981).....	8
Table 2: Visual Quality of the regional landscape .....	8
Table 3: Regional Visual Absorption Capacity evaluation.....	9
Table 4: Significance of impacts.....	18
Table 5: Landscape character sensitivity rating (Adapted from GOSW, 2006).....	19
Table 6: Landscape impact – Altering the landscape character .....	20
Table 7: Evaluation of alternative alignments.....	27
Table 8: Confidence level chart and description .....	34
Table 9: Visual receptor sensitivity .....	35

## LIST OF ABBREVIATIONS

<b>EIA</b>	Environmental Impact Assessment.
<b>FHWA</b>	Federal Highway Administration of the United States Department of Transportation. The publishers of the guide " <i>Visual Impact Assessment for High Projects</i> " 1981.
<b>LCA</b>	Landscape Character Assessment.
<b>LT</b>	Landscape Type
<b>VAC</b>	Visual Absorption Capacity
<b>VIA</b>	Visual Impact Assessment.
<b>ULI</b>	Urban Land Institute
<b>ZVI</b>	Zone of Visual Influence.

## 1. INTRODUCTION

Dynamic Integrated Geohydro Environmental Services (DIGES) was appointed by Eskom Holdings Limited Transmission Division, as the independent environmental consultant to undertake the Environmental Impact Assessment (EIA) for the proposed establishment of the Marang B 400/132kV and  $\pm 2$ km, 400 kV power line from the existing Bighorn-Marang or Medupi-Marang or Midas-Marang 400kV power lines, Rustenburg, North West Province.

Axis Landscape Architecture cc was appointed by DIGES as a sub-consultant to complete a Visual Impact Assessment. This Visual Impact Assessment (VIA) is a specialist study that forms part of the EIA and addresses the visual affects of the proposed transmission line on the receiving environment.

Three alternative positions for the Marang B 400/132kV Substation have been proposed and a  $\pm 2$  km, 400kV power line from the existing Bighorn-Marang or Medupi-Marang 400 kV power line.

The study area contains the extent of the proposed positions and line and includes an approximate 5 km buffer area around the alignment.

### 1.1. BACKGROUND AND BRIEF


This VIA will conform to the requirements of a level three assessment, which requires the realisation of the following objectives (Adapted from Oberholzer (2005)):

- Determination of the extent of the study area;
- Description of the proposed project and the receiving environment;
- Identification and description of the landscape character of the study area;
- Identification of the elements of particular visual value and -quality that could be affected by the proposed project;
- Identification of landscape- and visual receptors in the study area that will be affected by the proposed project and assess their sensitivity;
- Indication of potential landscape- and visual impacts;
- Assessment of the significance of the landscape- and visual impacts;and
- Recommendations of mitigation measures to reduce and/or alleviate the potential adverse landscape- and visual impacts.

### 1.2. STUDY AREA

The study area includes the entire area covered by the line alignment and the substation sites. The site located approximately 4km north-east from Rustenburg in the Bonjanala Region of the North West Province (Figure 1).

Figure 1: Locality Plan

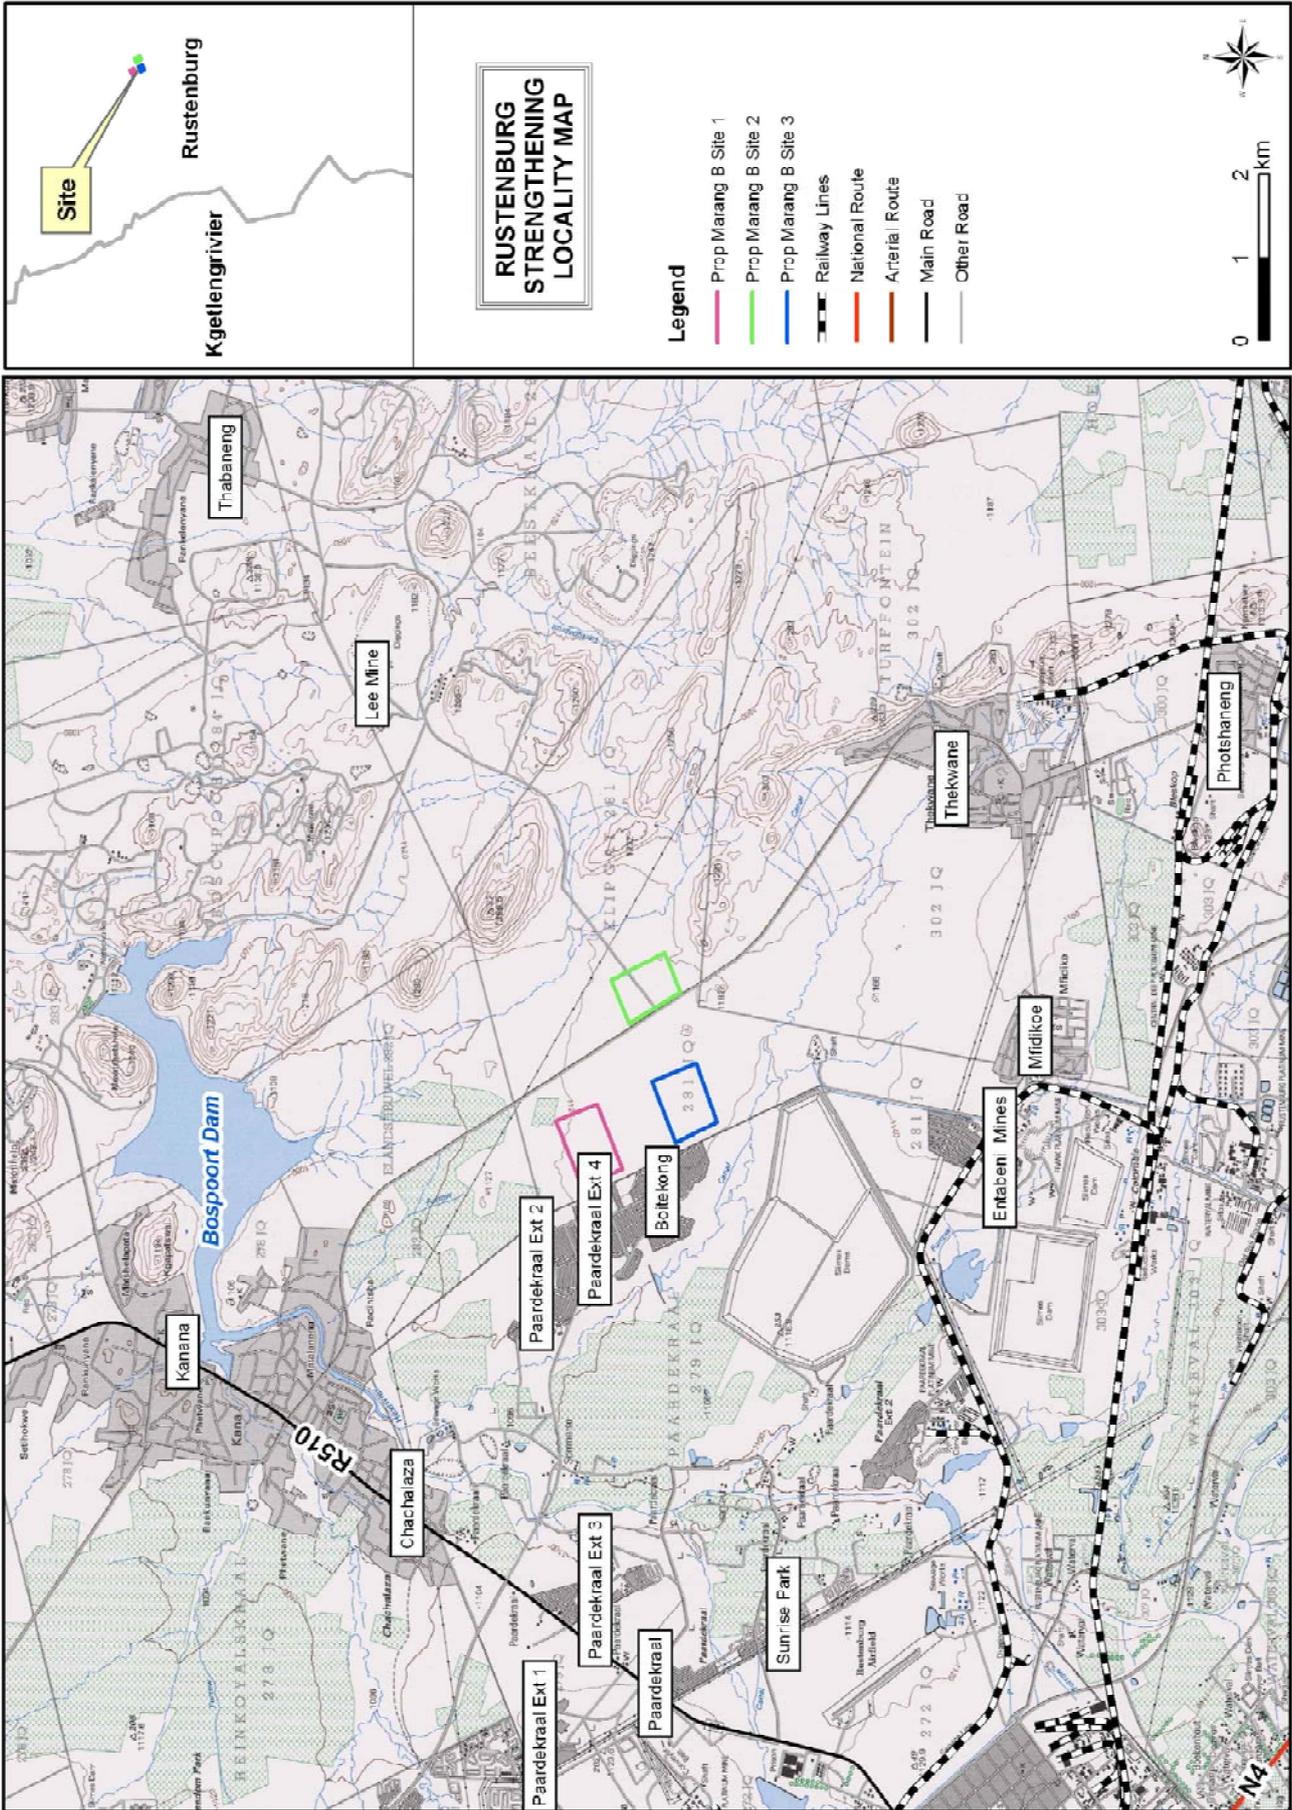

## 2. STUDY APPROACH

### 2.1. INFORMATION BASE

This assessment was based on information from the following sources:

- Topographical maps and GIS generated data were sourced from the Surveyor General, Surveys and Mapping in Mowbray, Cape Town and ECOGIS (2014) respectively;
- Observations made and photographs taken during site visits;
- Technical information received from Eskom Transmission;
- Professional judgement based on experience gained from similar projects; and
- Literature research on similar projects.

### 2.2. ASSUMPTIONS AND LIMITATIONS

This assessment was undertaken during the conceptual stage of the project and is based on information available at the time.

- An exact commencement date for the construction phase is unknown. Construction is expected to commence as soon as public participation is complete and approval is received from the relevant authorities;
- The exact location, size and number of construction camps and material lay-down yards are not yet specified at this stage of the project. It is anticipated that construction camps will be set up on farms at central locations along the preferred alignment. The construction camps will consist of temporary structures such as tents or temporary buildings. Ablution facilities will also be associated with the construction camps and are expected to be portable toilets and temporary shower facilities;
- The exact positions of the pylons are not yet determined. The visibility results have been generated from the anticipated alignment and may deviate from the route for the final approved alignment. The differences are considered omissible;

### 2.3. LEVEL OF CONFIDENCE

The level of confidence assigned to the findings of this assessment is based on:

- The level of information available and/or understanding of the study area (rated 2); and
- The information available and/or knowledge and experience of the project (rated 3).

This visual impact assessment is rated with a general confidence level of 6. This rating indicates that the author's general confidence in the accuracy of the findings is *high* (Table 8). Where the confidence level of specific findings is not regarded as high, it is noted in the last column of each impact assessment table.

### 2.4. METHOD

A broad overview of the approach and methodology used in this assessment is provided below:

- The extent of the study area is determined and indicated in Figure1;
- The site is visited to establish a photographic record of the site, views and areas of particular visual quality and or -value;
- The project components and activities are described and assessed as potential elements of visual and landscape impacts;
- The receiving environment is described in terms of its prevailing landscape- and visual character;

- Landscape- and visual receptors that may be affected by the proposed project are identified and described;
- The sensitivity of the landscape- and visual receptors is assessed;
- The severity of the landscape- and visual impacts is determined;
- The significance of the visual and landscape impacts is assessed;
- Mitigation measures are proposed to reduce adverse impacts; and
- The findings of the study are documented in this Visual Impact Assessment.

### **3. PROJECT DESCRIPTION**

#### **3.1. OVERVIEW OF DEVELOPMENT**

The project involves the construction and maintenance of a new 3x 500MVA 400/132kV Main Transmission Substation (MTS), Marang B on approximately  $\pm 30$  hectares and a  $\pm 2$ km 400kV loop-in-loop-out power line from the existing Bighorn-Marang/Medupi-Marang 400 kV power lines.

#### **3.2. PROJECT COMPONENTS AND ACTIVITIES**

Each project component and activity will affect the receiving environment differently and is therefore discussed separately. The following project components will occur during the construction and operational phases of the project and are identified as elements that may cause a potential landscape and/or visual impact:

##### **3.2.1. CONSTRUCTION CAMPS AND LAY-DOWN YARDS**

The construction phase is expected to continue for 12 months from the commencement date. Temporary construction camps will be present for the duration of the construction period. The appointed contractor will set up construction camp along the alignment where practical. The material lay-down yards are expected to be located adjacent the construction camp and will serve as storage areas for the construction material and equipment (Figure 2).

Various types of construction equipment will be required to erect the transmission towers and suspend the electrical cables between them. A TLB, cement truck and mobile crane will be used during the construction phase in conjunction with between 10 and 40 labourers.

##### **3.2.2. ACCESS ROADS**

Where no access roads are available and vehicular access is required, roads will be constructed. Access may be by means of a two-track dirt road or a cleared corridor. It is expected that roads will be rehabilitated after the construction phase or maintained to facilitate access during periodic maintenance visits (Figure 2).

##### **3.2.3. SUBSTATION**

The entire project will require a site of approximately 30Ha, this area being enclosed by three 4m high fences.

A level or stepped platform will be created with a buffer zone inside the fence. On the outskirts of this area will be several terminal gantries which are the termination points for the various set of lines entering or leaving the substation. These structures will be approximately 45 meters tall.

The greater area of the platform will be taken up by the bus bar structures which will be up to a maximum of 27m in height, 2 x 500MVA 400/132kV transformers, other equipment and equipment buildings that will be approximately 13m in height. This includes a number of fire safety walls.

Figure 2: Example of construction camps



Example of site offices



Example of bush clearing



Example of a construction camp

EXAMPLE OF CONSTRUCTION CAMPS

RUSTENBURG STRENGTHENING  
PHASE 2 (MARANG B)

Compiled for:  
Dynamic Integrated Geohydro  
Environmental Services  
Reference: RUS2013- LANDS  
TYPES-A4.cdr

Date:  
2014-02-11



## **4. DESCRIPTION OF THE AFFECTED ENVIRONMENT**

Landscape and visual impacts may result from changes to the landscape. A distinction should be made between impacts on the visual resource (landscape) and on the viewers. The former are impacts on the physical landscape that may result in changes to landscape character while the latter are impacts on the viewers themselves and the views they experience.

### **4.1. VISUAL RESOURCE**

The study area focuses on the landscape within a 5km radius around the proposed development that is surrounded by residential, farms, undeveloped natural and commercial areas.

According to Low and Rebelo (1996), the site is classified as 'Mixed Bushveld'. It is characterised from a dense, short bushveld to a rather open tree savanna.

#### **4.1.1. LANDSCAPE CHARACTER ASSESSMENT**

Landscape Character Assessment (LCA) is concerned primarily with the observable elements, components or features within a landscape that individually and collectively define the landscape characteristics.

The study area consists of cultivated, residential areas, subsistence farming and mining. Extensive mining is scattered through the study area. Residential development activities are more intense from the central to southern side of the study area.

The residential suburbs are classified under one landscape type due to the near identical character. The residential areas are partially vegetated and consist mostly of single storey residential units.

The network of streets and roads as well as the street trees frames each residential block that creates a strong regimented appearance to the study area. Generally, the land use is residential, interspersed with retail developments along main roads.

#### **4.1.2. VISUAL CHARACTER**

Visual character is based on human perception and the observer's response to the relationships between and composition of the landscape, the land uses and identifiable elements in the landscape. The description of the visual character includes an assessment of the scenic attractiveness regarding those landscape attributes that have aesthetic value and contribute significantly to the visual quality of the views, vistas and/or viewpoints of the study area.

#### 4.1.2.1 Visual Quality

Visual quality is a qualitative evaluation of the composition of landscape components and their excellence in scenic attractiveness. Many factors contribute to the visual quality of the landscape and are grouped under the following main categories (Table 1) that are internationally accepted indicators of visual quality (FHWA, 1981):

**Table 1: Criteria of Visual Quality (FHWA, 1981)**

INDICATOR	CRITERIA
Vividness	The memorability of the visual impression received from contrasting landscape elements as they combine to form a striking and distinctive visual pattern.
Intactness	The integrity of visual order in the natural and man-built landscape, and the extent to which the landscape is free from visual encroachment.
Unity	The degree to which the visual resources of the landscape join together to form a coherent, harmonious visual pattern. Unity refers to the compositional harmony of inter-compatibility between landscape elements.

The landscape is allocated a rating from an evaluation scale of 1 to 7 and divided by 3 to get an average. The evaluation scale is as follows: Very Low =1; Low =2; Moderately Low =3; Moderate =4; Moderately High =5; High =6; Very High =7;

The regional landscape is assessed against each indicator separately. All three indicators should be *high* to obtain a *high* visual quality. The evaluation is summarised in Table 2.

**Table 2: Visual Quality of the regional landscape**

VIVIDNESS	INTACTNESS	UNITY	VISUAL QUALITY
2	2	2	Low

The low visual quality can be attributed the mining activities that are scattered around the study area.

#### 4.1.2.2 Visual absorption capacity

Visual Absorption Capacity (VAC) signifies the ability of the landscape to accept additional human intervention without serious loss of character and visual quality or value. VAC is founded on the characteristics of the physical environment such as:

- Degree of visual screening:
  - A degree of visual screening is provided by landforms, vegetation cover and/or structures such as buildings. For example, a high degree of visual screening is present in an area that is mountainous and is covered with a forest compared to an undulating an mundane landscape covered in grass;
- Terrain variability:
  - Terrain variability reflects the magnitude of topographic elevation and diversity in slope variation. A highly variable terrain will be recognised as one with great elevation differences and a diversity of slope variation creating talus slopes, cliffs and valleys. An undulating landscape with a monotonous and repetitive landform will be an example of a low terrain variability;
- Land cover:
  - Land cover refers to the perceivable surface of the landscape and the diversity of patterns, colours and textures that are presented by the particular land cover (i.e. urbanised, cultivated, forested, etc.);

A basic rating system is used to evaluate the three VAC parameters. The values are relative and relate to the type of project that is proposed and how it may be absorbed in the landscape (Table 3). A three value range is used; three (3) being the highest potential to absorb an element in the landscape and one (1) being the lowest potential. The values are counted together and categorised in a *high*, *medium* or *low* VAC rating.

**Table 3: Regional Visual Absorption Capacity evaluation**

VISUAL SCREENING	TERRAIN VARIABILITY	LAND COVER	VAC
2	2	1	Moderately low

The VAC of the study area is considered moderately low and provides minimal screening capacity for this project. The moderately low VAC relates to the varied topography and predominantly developed areas. The regular forms and associated vertical posture of the proposed power line are unlike the undulating and horizontal appearance of the topography.

The less prominent project components such as access roads are expected to be visually absorbed to a greater degree in the landscape. The relative modest scale and extent of the project components are more readily accepted and will not create major alterations to the landscape character.

Figure 3: Land cover map of study area


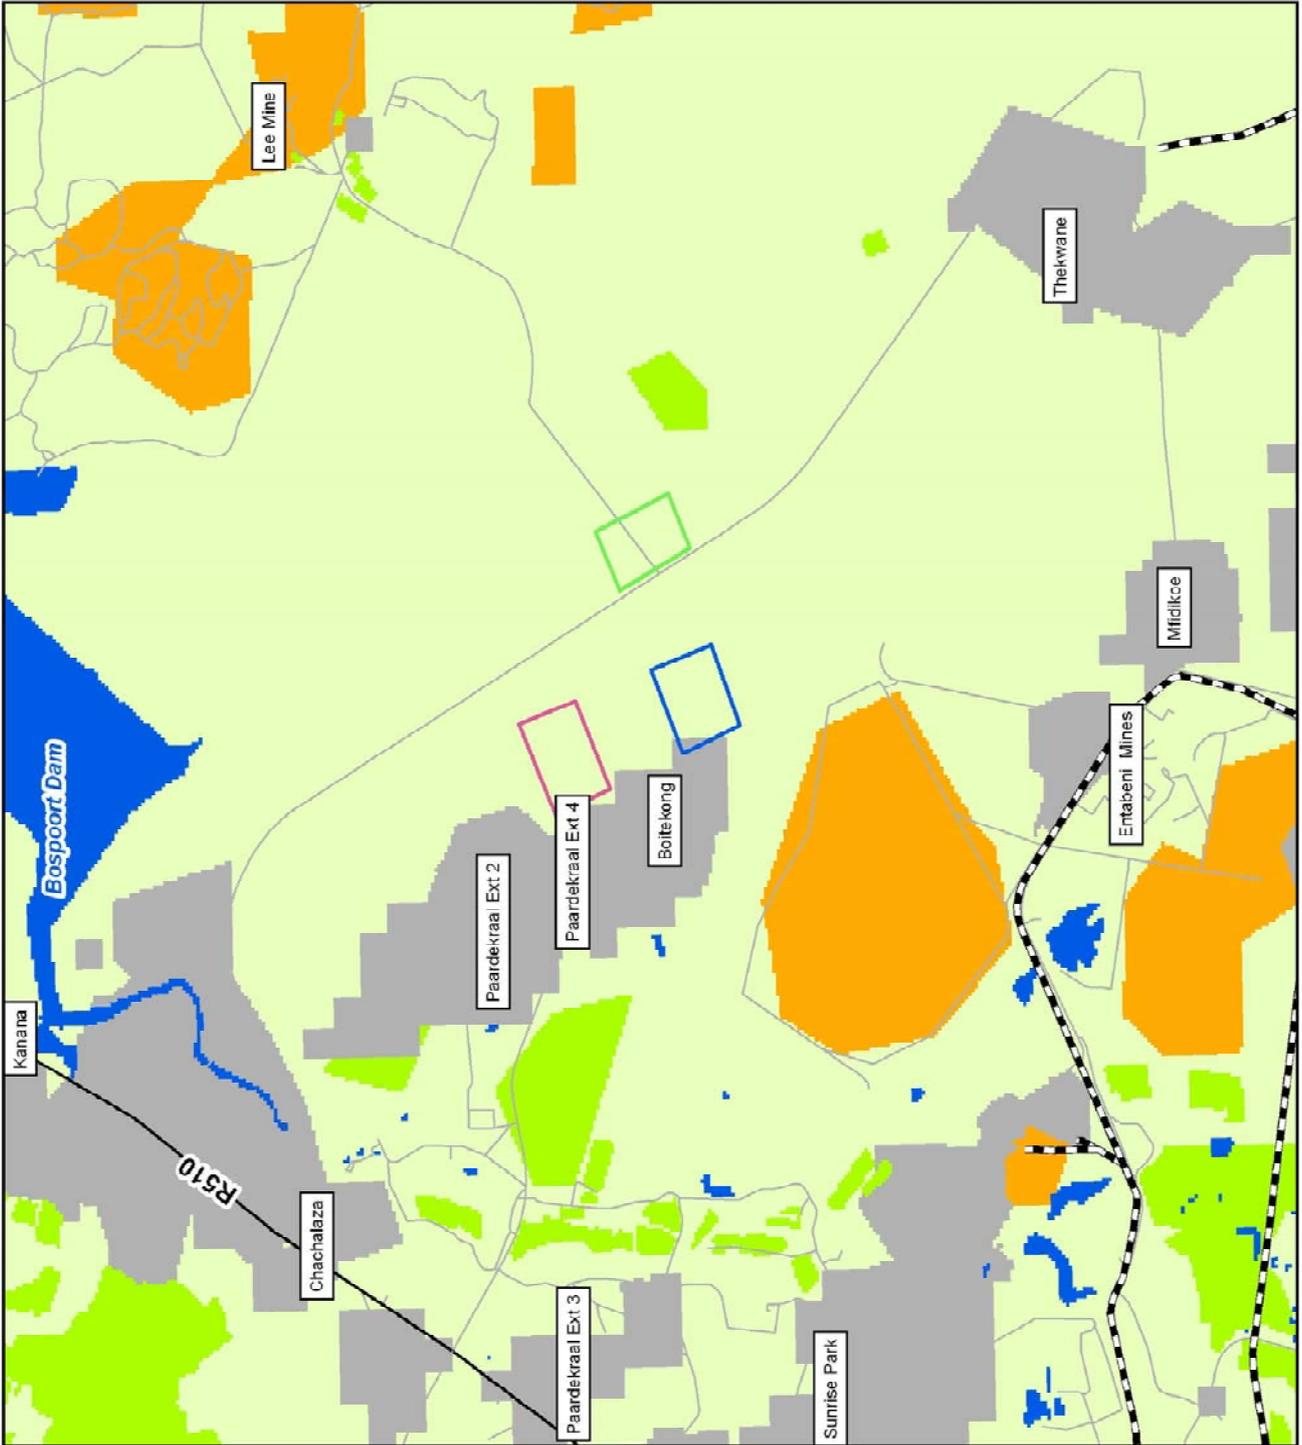


Figure 4: Landscape character of study area



EXISTING VEGETATION

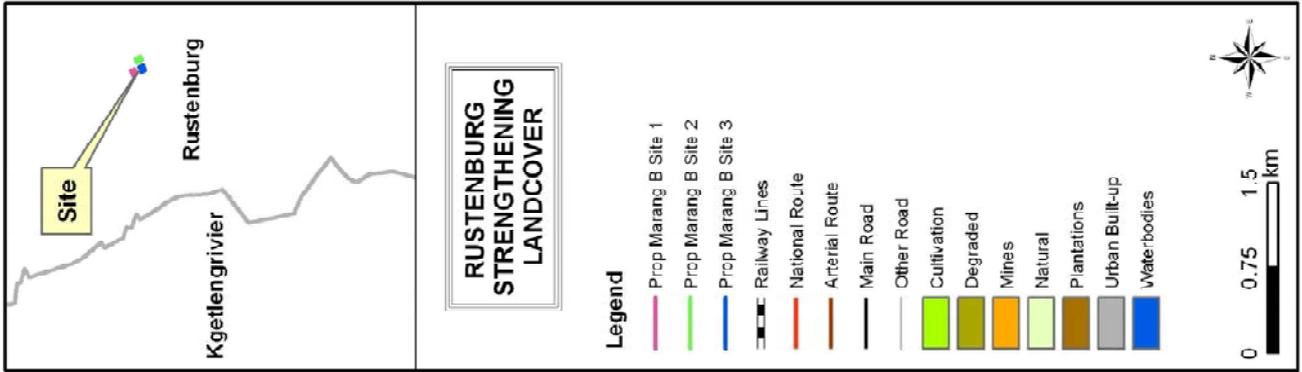

MINES

<p>LANDSCAPE TYPES</p>	<p>Compiled for: Dynamic Integrated Geohydro Environmental Services Reference: RUS2013- LANDS TYPES-A4.cdr</p>	
<p>RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)</p>	<p>Date: 2014-02-11</p>	

Figure 5: Landscape character of study area



RESIDENTIAL




GRAZING

<p>LANDSCAPE TYPES</p>	<p>Compiled for: Dynamic Integrated Geohydro Environmental Services Reference: RUS2013- LANDS TYPES-A4.cdr Date: 2014-02-11</p>	
<p>RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)</p>		

RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)

PREPARED BY AXIS LANDSCAPE ARCHITECTS

Figure 6: Photo Reference Map

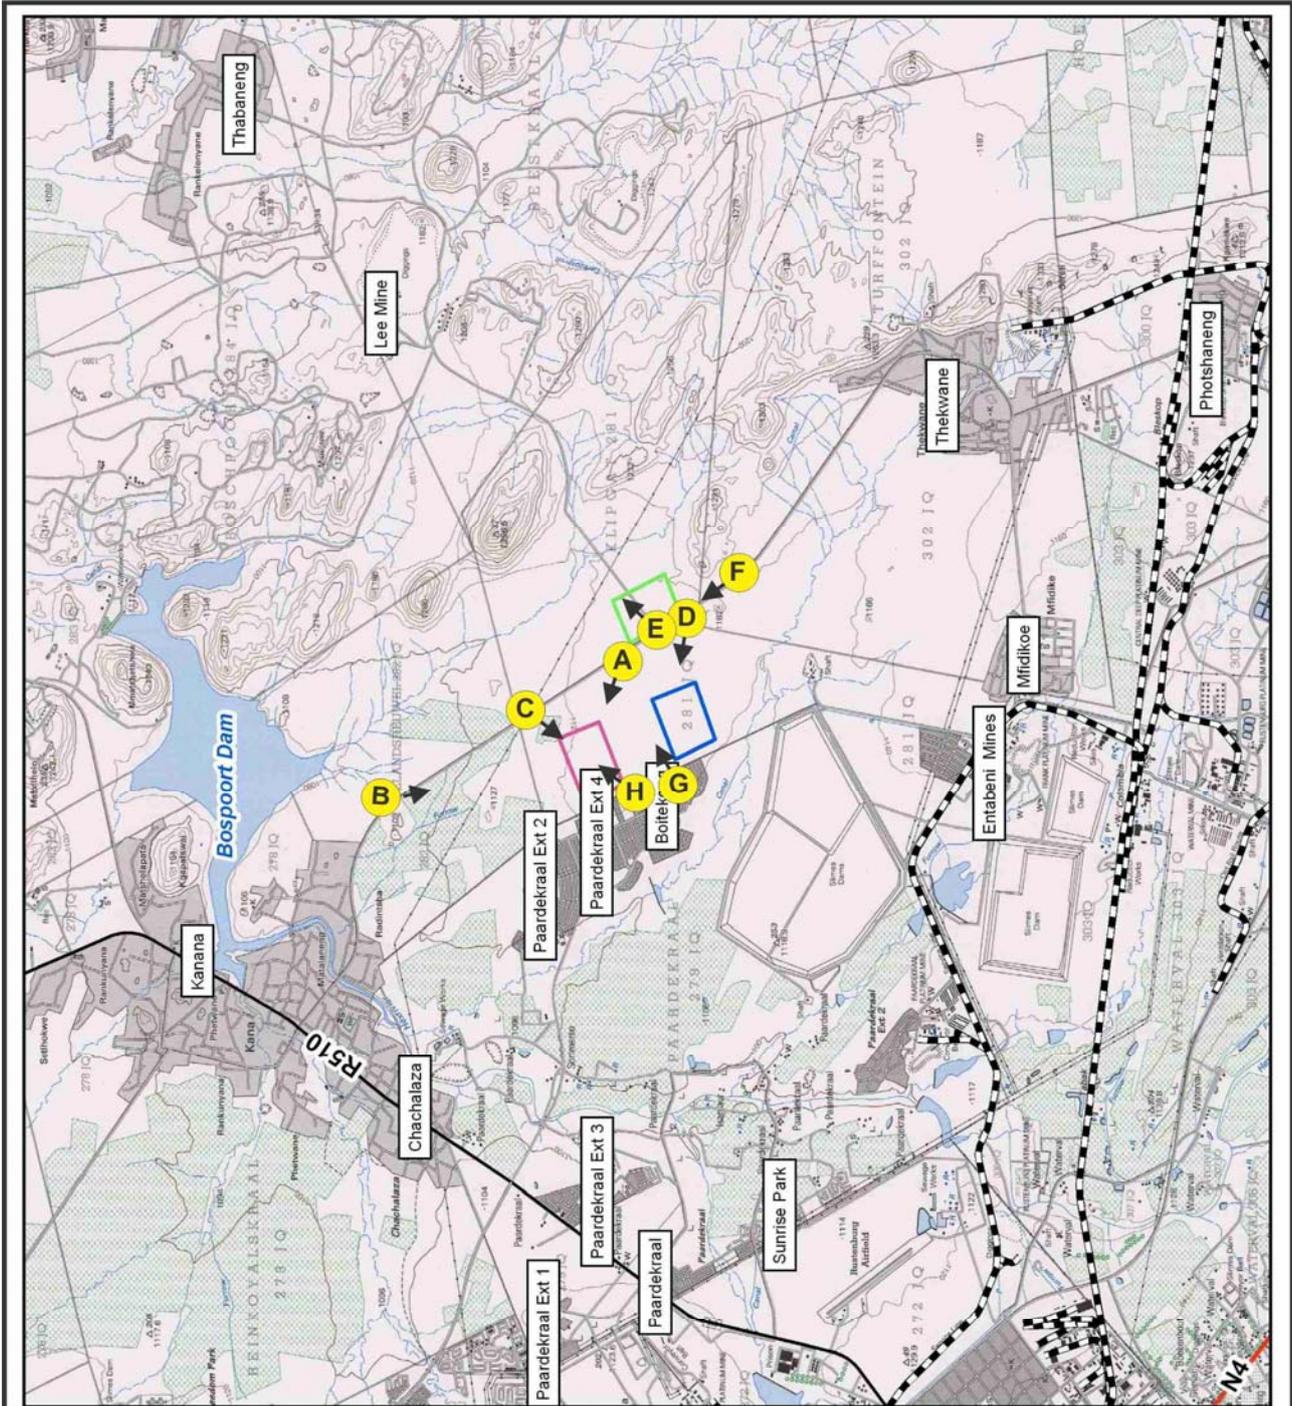

<p>SITE CONTEXT PHOTO'S REFERENCE MAP</p>	<p>Compiled for: Dynamic Integrated Geohydro Environmental Services</p>	
<p>RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)</p>	<p>Reference: RUS2013- LANDS TYPES-A4.cdr</p> <p>Date: 2014-02-11</p>	

Figure 7: Photo plate 1



VIEW A: VIEW TOWARDS EXISTING MARANG SUBSTATION



VIEW B: VIEW FROM A LOCAL ROAD

<p>SITE CONTEXT PHOTO'S</p>	<p>Compiled for: Dynamic Integrated Geohydro Environmental Services Reference:RUS2013- LANDS TYPES-A4.cdr  Date: 2014-02-11</p>	
<p>RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)</p>		

RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)

Figure 8: Photo plate 2



VIEW C: VIEW FROM A LOCAL ROAD TOWARDS MARANG B SITE 1



VIEW D: VIEW FROM A LOCAL ROAD TOWARDS MARANG B SITE 3

<p>SITE CONTEXT PHOTO'S</p>	<p>Compiled for: Dynamic Integrated Geohydro Environmental Services Reference:RUS2013- LANDS TYPES-A4.cdr</p>	
<p>RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)</p>	<p>Date: 2014-02-11</p>	

Figure 9: Photo plate 3



VIEW E: VIEW FROM A LOCAL ROAD TOWARDS MARANG B SITE 2



VIEW F: VIEW FROM A LOCAL ROAD

<p>SITE CONTEXT PHOTO'S</p>	<p>Compiled for: Dynamic Integrated Geohydro Environmental Services Reference:RUS2013- LANDS TYPES-A4.cdr  Date: 2014-02-11</p>	
<p>RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)</p>		

RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)

PREPARED BY AXIS LANDSCAPE ARCHITECTS

Figure 10: Photo plate 4



VIEW G: VIEW FROM A LOCAL ROAD



VIEW H: VIEW FROM A LOCAL ROAD

<p>SITE CONTEXT PHOTO'S</p>	<p>Compiled for: Dynamic Integrated Geohydro Environmental Services</p>	
<p>RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)</p>	<p>Reference: RUS2013- LANDS TYPES-A4.cdr</p> <p>Date: 2014-02-11</p>	

RUSTENBURG STRENGTHENING PHASE 2 (MARANG B)

## 5. IMPACT ASSESSMENT

The significance of impacts is a comparative function relating to the severity of the identified impacts on the respective receptors. The significance of an impact is considered *high* should a *highly* sensitive receptor be exposed to a *highly* severe impact (Table 4).

**Table 4: Significance of impacts**

RECEPTOR SENSITIVITY	IMPACT SEVERITY		
	LOW	MEDIUM	HIGH
LOW	No significance	Low	Low
MEDIUM	Low	Medium	Medium
HIGH	Low	Medium	High

### 5.1. SIGNIFICANCE OF LANDSCAPE IMPACT

#### 5.1.1. LANDSCAPE CHARACTER SENSITIVITY

The sensitivity of the landscape character is an indication of "...the degree to which a particular landscape can accommodate change from a particular development, without detrimental effects on its character" (GLVIA, 2002). A landscape with a *high* sensitivity would be one that is greatly valued for its aesthetic attractiveness and/or have ecological, cultural or social importance through which it contributes to the inherent character of the visual resource.

The assessment of the landscape is substantiated through professional judgement and informed reasoning which is based on the landscape character assessment in Section 4. A landscape sensitivity rating was adapted from GOSW (2006) (Table 5) and applied in the classification of the study area into different sensitivity zones.

**Table 5: Landscape character sensitivity rating (Adapted from GOSW, 2006)**

	DESCRIPTION
<b>Low sensitivity</b>	<p>These landscapes are likely to:</p> <ul style="list-style-type: none"> <li>◦ Have distinct and well-defined landforms;</li> <li>◦ Have a strong sense of enclosure;</li> <li>◦ Provide a high degree of screening;</li> <li>◦ Have been affected by extensive development or man-made features;</li> <li>◦ Have reduced tranquillity;</li> <li>◦ Are likely to have little inter-visibility with adjacent landscapes; and</li> <li>◦ Exhibit no or a low density of sensitive landscape features that bare visual value.</li> </ul>
<b>Moderately sensitivity</b>	<p>These landscapes are likely to:</p> <ul style="list-style-type: none"> <li>◦ Have a moderately elevated topography with reasonably distinct landforms that provides some sense of enclosure;</li> <li>◦ Have been affected by several man-made features;</li> <li>◦ Have limited inter-visibility with adjacent landscapes; and</li> <li>◦ Exhibit a moderate density of sensitive landscape features that bare visual value.</li> </ul>
<b>Highly sensitivity</b>	<p>These landscapes are likely to:</p> <ul style="list-style-type: none"> <li>◦ Consist mainly of undulating plains and poorly defined landforms;</li> <li>◦ Be open or exposed with a remote character and an absence of man-made features;</li> <li>◦ Are often highly visible from adjacent landscapes; and</li> <li>◦ Exhibit a high density of sensitive landscape features that bare visual value.</li> </ul>

The majority of the study area is considered to have a *moderately low* landscape character sensitivity due to the relative disturbed landscape. Moderate terrain variability occurs through of the study area where a moderately low VAC can be expected. Generally the vegetation varies from medium to low shrubs which will provide minimal visual screening for the proposed substation and transmission line.

The landscape character is considered moderately susceptible to change, whether it is a low intensity change over an extensive area or an acute change over a limited area. Generally, the vegetation occurring in the study area is resilient and recovers very quick from surface disturbances.

Previous human induced activities and interventions have negatively impacted the original landscape character of the different landscape types. In this case the mines and existing infrastructure, including transmission lines, roads, etc., can be classified as landscape disturbances and elements that cause a reduction in the condition of the affected landscape type and detrimentally affect the quality of the visual resource.

### 5.1.2. SEVERITY OF POTENTIAL LANDSCAPE IMPACTS

Landscape impacts are alterations to the fabric, character, visual quality and/or visual value which will either positively or negatively affect the landscape character. During the construction and operational phases, the project components are expected to impact on the landscape character of the landscape types it traverses. The magnitude/severity of this intrusion is measured against the scale of the project, the permanence of the intrusion and the loss in visual quality, -value and/or VAC.

**Table 6: Landscape impact – Altering the landscape character**

Activity	Nature of Impact	Extent of Impact	Duration of Impact	Severity of Impact	Probability of Impact	Significance without Mitigation	Significance with Mitigation	Level of Confidence
<b>Construction phase</b>								
Marang B Site 1	Negative – Impacting on the visual quality of the landscape due to the presence of foreign elements and a loss of vegetation cover.	Local	Permanent if not mitigated	Low	Definite	Low	Low	High
Marang B Site 2				Moderate	Definite	Moderate	Low	High
Marang B Site 3				Low	Definite	Low	Low	High
400kV loop-in-loop-out power line				Low	Definite	Low	Low	High
<b>Operational phase</b>								
Marang B Site 1	Negative – Impacting on the visual quality of the landscape due to the presence of a substation and transmission line.	Local	Permanent	Low	Definite	Low	Low	High
Marang B Site 2				Moderate	Definite	Moderate	Low	High
Marang B Site 3				Low	Definite	Low	Low	High
400kV loop-in-loop-out power line				Low	Definite	Low	Low	High

### Construction phase

The activities that are expected to cause landscape impacts and that are associated with the construction phase, are the establishment of the construction camp, construction of access roads and the clearance of the servitude. These activities will create surface disturbances which will result in the removal of vegetation and the exposure of the underlying soil.

The extent of the disturbances will generally affect a big footprint area. Access road to the substation is expected to be a tar or dirt road which will create disturbance. During construction, the area around the substation will be disturbed. Vegetation will be trampled and may take months to recover. The size and location of the substation will play a major role in the severity of the landscape impact.

The construction camp and lay-down yard is anticipated to disturb a much smaller area. Due to a lack of technical information, two options are considered namely; the location of construction camp in remote, virgin land, or in/adjacent existing settlements. The initial presence of a construction camp in an undeveloped landscape will cause a temporary and localised alteration to the landscape character. A construction camp located in or adjacent to an existing town or settlement will be easily associated with the town and therefore the presence of the town, mitigates the impact. The mitigating result is most effective, the bigger the town or settlement is.

Servitudes of lines entering and exiting the substation will generally be cleared of higher growing and dense vegetation to reduce biomass that may cause a fire hazard if ignited. The complete removal of high growing vegetation and shrubs will result in disturbed areas of exposed soil and difference in texture.

The exposed soil and change in texture will contrast with the intact vegetation around the disturbance footprint and servitudes.

### Operational phase

Surface disturbances created during construction may remain for an extended period during the operational phase. These are seen as residual affects carried forward from the construction phase and can be completely or substantially mitigated if treated appropriately during the construction phase.

An additional impact will be caused as a result of the presence of the completed substation, i.e. that of the evenly spaced towers of the lines, buildings and structures. The industrial character and the near monumental vertical scale of the towers will severely contrast with the uniform landscape character that prevails through most of the study area.

## 5.2. SIGNIFICANCE OF VISUAL IMPACTS

### 5.2.1. VIEWER SENSITIVITY

Within the receiving environment, specific viewers (visual receptors) experience different views of the visual resource and value it differently. They will be affected because of alterations to their views due to the proposed project. The visual receptors are grouped according to their similarities. The visual receptors included in this study are:

- Residents;
- Tourists; and
- Motorists.

To determine visual receptor sensitivity a commonly used rating system is utilised. This is a generic classification of visual receptors and enables the visual impact specialist to establish a logical and consistent visual receptor sensitivity rating for viewers who are involved in different activities without engaging in extensive public surveys.

#### 5.2.1.1 Residents

Residents of the affected environment are classified as visual receptors of *high* sensitivity owing to their sustained visual exposure to the proposed development as well as their attentive interest towards their living environment.

#### 5.2.1.2 Tourists

Tourists are regarded as visual receptors of exceptional *high* sensitivity. Their attention is focused towards the landscape which they essentially utilise for enjoyment purposes and appreciation of the quality of the landscape.

#### 5.2.1.3 Motorists

Motorists are generally classified as visual receptors of *low* sensitivity due to their momentary view and experience of the proposed development. As a motorist's speed increases, the sharpness of lateral vision declines and the motorist tends to focus on the line of travel (USDOT, 1981). This adds weight to the assumption that under normal conditions, motorists will show *low* levels of sensitivity as their attention is focused on the road and their exposure to roadside objects is brief.

Motorists on the scenic routes in the study area will present a higher sensitivity. Their reason for being in the landscape is similar to that of the tourists and they will therefore be categorised as part of the tourist viewer group.

### 5.2.2. SEVERITY OF POTENTIAL VISUAL IMPACTS

Severity of visual impact refers to the magnitude of change to specific visual receptor's views and/or experience of the landscape. Severity of visual impact is influenced by the following factors:

- The **viewer's exposure** to the project:

- Distance of observers from the proposed project;
- The visibility of the proposed project (ZVI);
- Number of affected viewers; and
- Duration of views to development experienced by affected viewers.
- Degree of **visual intrusion** created by the project.

Empirical research indicates that the visibility of a transmission tower and hence the severity of visual impact, decreases as the distance between the observer and the tower increases. The landscape type, through which the transmission line crosses, can mitigate the severity of visual impact through topographical or vegetative screening. Bishop *et al* (1988) noticed that in some cases the tower may dominate the view for example, silhouetted against the skyline, or in some cases be absorbed in the landscape. A complex landscape setting with a diverse land cover and topographical variation has the ability to decrease the severity of visual impact more than a mundane landscape (Bishop *et al*, 1985).

The Zone of Visual Influence (ZVI) is determined through a Geographical Information System (GIS). The result reflects a shaded pattern which identifies the areas that are expected to experience views of the proposed alignments. The ZVI is limited to 5 km from the proposed alternative sites.

A visibility analysis has been completed for the proposed alignment (APPENDIX 1). According to Bishop *et al* (1988), visual receptors within 1 km from the alignment are most likely to experience the highest degree of visual intrusion, hence contributing to the severity of the visual impact. This is considered as the zone of highest visibility after which the degree of visual intrusion decreases rapidly at distances further away.

In order to assess the extent and degree of visibility in the visual envelope, a Geographical Information System (GIS) was utilised. A visibility analysis was performed which provides the following information Figure 11 to Figure 13:

- The areas within the visual envelope that may experience views of the proposed project; and
- The degree of visibility in terms of the percentage of the proposed project that will be visible from a specific location.

The GIS performs an analysis for a series of elevated observer points which represents the height of the entire power line in a digital elevation model (DEM). This results in a visibility map with the degree of visibility illustrated by a colour.

The visibility analyses consider worst-case scenarios, using line-of-sight, based on topography alone. The screening capability of vegetation is not captured in the base model of the DEM and is therefore not considered in these results.

### 5.2.2.1 Potential visual impacts on residents

Activity	Nature of Impact	Extent of Impact	Duration of Impact	Severity of Impact	Probability of Impact	Significance without Mitigation	Significance with Mitigation	Level of Confidence
<b>Construction phase</b>								
Marang B Site 1	Negative – Construction camp and lay-down yards may cause unsightly views.	Local	Temporary	Moderate	Probable	Low	Low	High
Marang B Site 2				Low	Definite	Low	Low	High
Marang B Site 3				Moderate	Definite	Low	Low	High
400kV loop-in-loop-out power line				Moderate	Definite	Moderate	Low	High
<b>Operational phase</b>								
Marang B Site 1	Negative – The presence of a substation and transmission line intrudes on existing views and spoils the open views of the landscape.	Local	Permanent	Low	Definite	Low	Low	High
Marang B Site 2				Low	Definite	Low	Low	High
Marang B Site 3				Low	Definite	Low	Low	High
400kV loop-in-loop-out power line				Low	Definite	Low	Low	High

Generally, the study area is moderately populated, especially the residential developments and farming communities. These communities are normally situated along main transportation routes or adjacent to rivers or water resources.

Figure 12 to Figure 14 indicate that due to the scale of the project, the only sections of the proposed substation will be visible throughout of the study area. The topography provides moderate VAC to visually screen the components of the project and it can therefore be stated that the general visibility of the project will be low.

#### Construction phase

During the construction phase, unsightly views may be created by the presence of the construction camp and the lay-down yard. The duration of the potential visual impact will be temporary which will result in an anticipated *low* significance of visual impact for all alternatives. The visual exposure to the construction activity will initially be limited and only local residents will experience views of the site preparation activity. As the structures increase in scale and height, the ZVI increases, resulting in a greater number of affected viewers and a subsequent increase in visual exposure.

The visual intrusion will progressively increase in severity as the concentration of power lines increases to the substation. The cleared site, construction camp and material lay-down yard will appear unsightly and out of character. Large scale construction elements such as cranes, will be highly visible and increase awareness of the construction activity over a considerable area. The visual intrusion caused during the construction stage will be high, but will be temporary in nature.

#### Operational phase

The residents of the informal settlements next to the substation and power lines may experience a high degree of visual intrusion due to their proximity to all the Alternatives. These residents are within 5 km and in some instances within 1 km from the proposed locations. This is considered the zone of highest visibility in which the highest degree of visual intrusion can be expected.

### 5.2.2.2 Potential visual impacts on tourists

Activity	Nature of Impact	Extent of Impact	Duration of Impact	Severity of Impact	Probability of Impact	Significance without Mitigation	Significance with Mitigation	Level of Confidence
<b>Construction phase</b>								
Marang B Site 1	Negative – Construction camp and lay-down yards may cause unsightly views.	Local	Temporary	Low	Low Probability	Low	Low	High
Marang B Site 2				Low	Low Probability	Low	Low	High
Marang B Site 3				Low	Low Probability	Low	Low	High
400kV loop-in-loop-out power line				Low	Low Probability	Low	Low	High
<b>Operational phase</b>								
Marang B Site 1	Negative – The presence of a substation and transmission line intrudes on existing views and spoils the open views of the landscape.	Local	Permanent	Low	Low Probability	Low	Low	High
Marang B Site 2				Low	Low Probability	Low	Low	High
Marang B Site 3				Low	Low Probability	Low	Low	High
400kV loop-in-loop-out power line				Low	Low Probability	Low	Low	High

The entire study area is considered to have moderately-low tourism potential.

#### Construction phase

The temporary duration of the construction phase is not expected to cause major visual impacts. The location and size of the construction camp and lay-down yard will be crucial in regulating the impact. Detail information is not available and it is anticipated that the visual impact will occur localised and that a small number of tourists will be adversely affected by these project components during construction.

Their exposure to possible unsightly views of the construction camp and the associated activity will however be minimal and localised.

The potential visual impact on tourists during the construction phase of the proposed project can be mitigated with relative ease. The greatest factor to consider is the location of the construction camp out of potential views that may be experienced from scenic routes or tourist hotspots.

#### Operational phase

It can be concluded that all the alternatives will cause minimal visual intrusion for tourists travelling through the study area due to the low volume of tourists that will be travelling there. It is not visible from the main routes tourists travel.

### 5.2.2.3 Potential visual impacts on motorists

Activity	Nature of Impact	Extent of Impact	Duration of Impact	Severity of Impact	Probability of Impact	Significance without Mitigation	Significance with Mitigation	Level of Confidence
<b>Construction phase</b>								
Marang B Site 1	Negative – Construction camp and lay-down yards may cause unsightly views.	At a number of point locations	Intermittent	Low	Probable	Low	Low	High
Marang B Site 2				Low	Probable	Low	Low	High
Marang B Site 3				Low	Probable	Low	Low	High
400kV loop-in-loop-out power line				Low	Probable	Low	Low	High
<b>Operational phase</b>								
Marang B Site 1	Negative – The presence of a substation and transmission line intrudes on existing views and spoils the open views of the landscape.	Local	Intermittent	Low	Definite	Low	Low	High
Marang B Site 2				Low	Definite	Low	Low	High
Marang B Site 3				Low	Definite	Low	Low	High
400kV loop-in-loop-out power line				Low	Definite	Low	Low	High

The major route in the study area is the R510 connecting the mines, towns, residential area and informal settlements. The secondary and tertiary roads are a loose network of gravel roads linking smaller settlements and mines. These road networks in the study area carries a much lower volume of motorists. Their duration of views will be temporary and it is expected that the visual intrusion that they will experience will be low. For this report only motorists using the main routes will be considered as there are many countless smaller roads within the study area.

#### Construction phase

The potential visual impact that may be experienced by motorists during the construction phase is considered to be minimal. Limited information is available and the location and size of the construction camp and lay-down yard that are essential for accurately assessing the visual impact. It is anticipated that views of the construction camp and lay-down yard of all the Alternatives may be visible from a local road.

The presence of the construction camp and lay-down yard may create unsightly views. Motorists' visual exposure to the impact will be brief and the severity of visual impact will be *low*. The significance of potential visual impact is expected to be *low*.

#### Operational phase

The severity and significance of visual impact for the proposed alternatives on motorists will be low. The speed at which motorists travel also has a moderating effect on the severity of the visual impact and further reduces visual exposure.

## 6. RECOMMENDED MITIGATION MEASURES

The aim of mitigation is to reduce or alleviate the intrusive contrast between the proposed project components and activities, and the receiving landscape to a point where it is acceptable to visual and landscape receptors.

### 6.1. GENERAL

- Proceed with construction of the transmission line during the off peak tourism season;
- Where areas are going to be disturbed through the destruction of vegetation, for example the establishment of the construction camp, the vegetation occurring in the area to be disturbed must be salvaged and kept in a controlled environment such as a nursery, for future re-planting in the disturbed areas as a measure of rehabilitation;

### 6.2. ACCESS ROUTES

- Make use of existing access roads where possible;
- Where new access roads are required, the disturbance area should be kept as small as possible. A two-track dirt road will be the most preferred option;
- Locate access routes so as to limit modification to the topography and to avoid the removal of established vegetation;
- Avoid crossing over or through ridges, rivers, pans or any natural features that have visual value. This also includes centres of floral endemism and areas where vegetation is not resilient and takes extended periods to recover;
- Maintain no or minimum cleared road verges;
- Access routes should be located on the perimeter of disturbed areas such as cultivated/fallow lands as not to fragment intact vegetated areas; and
- If it is necessary to clear vegetation for a road, avoid doing so in a continuous straight line. Alternatively, curve the road in order to reduce the visible extent of the cleared corridor.

### 6.3. ACCESS ROUTES

- Make use of existing access roads where possible;
- Where new access roads are required, the disturbance area should be kept as small as possible. A two-track dirt road will be the most preferred option;
- Locate access routes so as to limit modification to the topography and to avoid the removal of established vegetation;
- Avoid crossing over or through ridges, rivers, pans or any natural features that have visual value. This also includes centres of floral endemism and areas where vegetation is not resilient and takes extended periods to recover;
- Maintain no or minimum cleared road verges;
- Access routes should be located on the perimeter of disturbed areas such as cultivated/fallow lands as not to fragment intact vegetated areas; and
- If it is necessary to clear vegetation for a road, avoid doing so in a continuous straight line. Alternatively, curve the road in order to reduce the visible extent of the cleared corridor.

### 6.4. CLEARED SERVITUDES

- Locate the alignment and the associated cleared servitude so as to avoid the removal of established vegetation; and
- Avoid a continuous linear path of cleared vegetation that would strongly contrast with the surrounding landscape character. Feather the edges of the cleared corridor to avoid a clearly defined line through the landscape.

## 6.5. CONSTRUCTION CAMP AND LAY DOWN YARDS

- If practically possible, locate construction camp in a area that are already disturbed or where it isn't necessary to remove established vegetation like for example, naturally bare areas;
- Utilise existing screening features such as dense vegetation stands or topographical features to place the construction camps and lay-down yards out of the view of sensitivity visual receptors;
- Keep the construction sites and camps neat, clean and organised in order to portray a tidy appearance; and
- Screen the construction camp and lay-down yards by enclosing the entire area with a dark green or black shade cloth of no less than 2 m height.

## 7. CONCLUSION

The three alternative substation sites for the Marang B 400/132kV Substation and a  $\pm 2$  km, 400kV power line from the existing Bighorn-Marang or Medupi-Marang have been evaluated against international accepted criteria to determine the impact they will have on the landscape character and the viewers that have been identified in the study area.

The three alternative substation sites are rated according to preference by using a three-point rating system in Table 7, one (1) being the most preferred, to three (3) being the least preferred. The preference rating is informed by the impact assessment discussions in Section 5 and the overall performance of each alternative with regards to the impact on the landscape character and the identified viewers.

**Table 7: Evaluation of alternative alignments**

ALTERNATIVES	PREFERENCE RATING
Marang B Site 1	1
Marang B Site 2	3
Marang B Site 3	2

The Marang B Site 1 is regarded as the most preferred alternative. Its location and position in the landscape is considered to cause the least impact on the landscape character due to the reduced sensitivity of the landscape along the servitudes and the local roads.

The impact of the Marang B Site 1 on visual receptors varies between residents, tourists and motorists. The Marang B Site 1 great advantage lies in the less significant landscape and visual impact on motorists and residents as compared to the other alternatives.

## **APPENDIX 1**

Figure 11 to Figure 13 reflects the results of a visibility assessment, carried out using GIS software. The results provide a clear interpretation of the extent of the visual influence and also provide an indication of the land use that can be expected in the affected areas.

Figure 11: Marang B Site 1

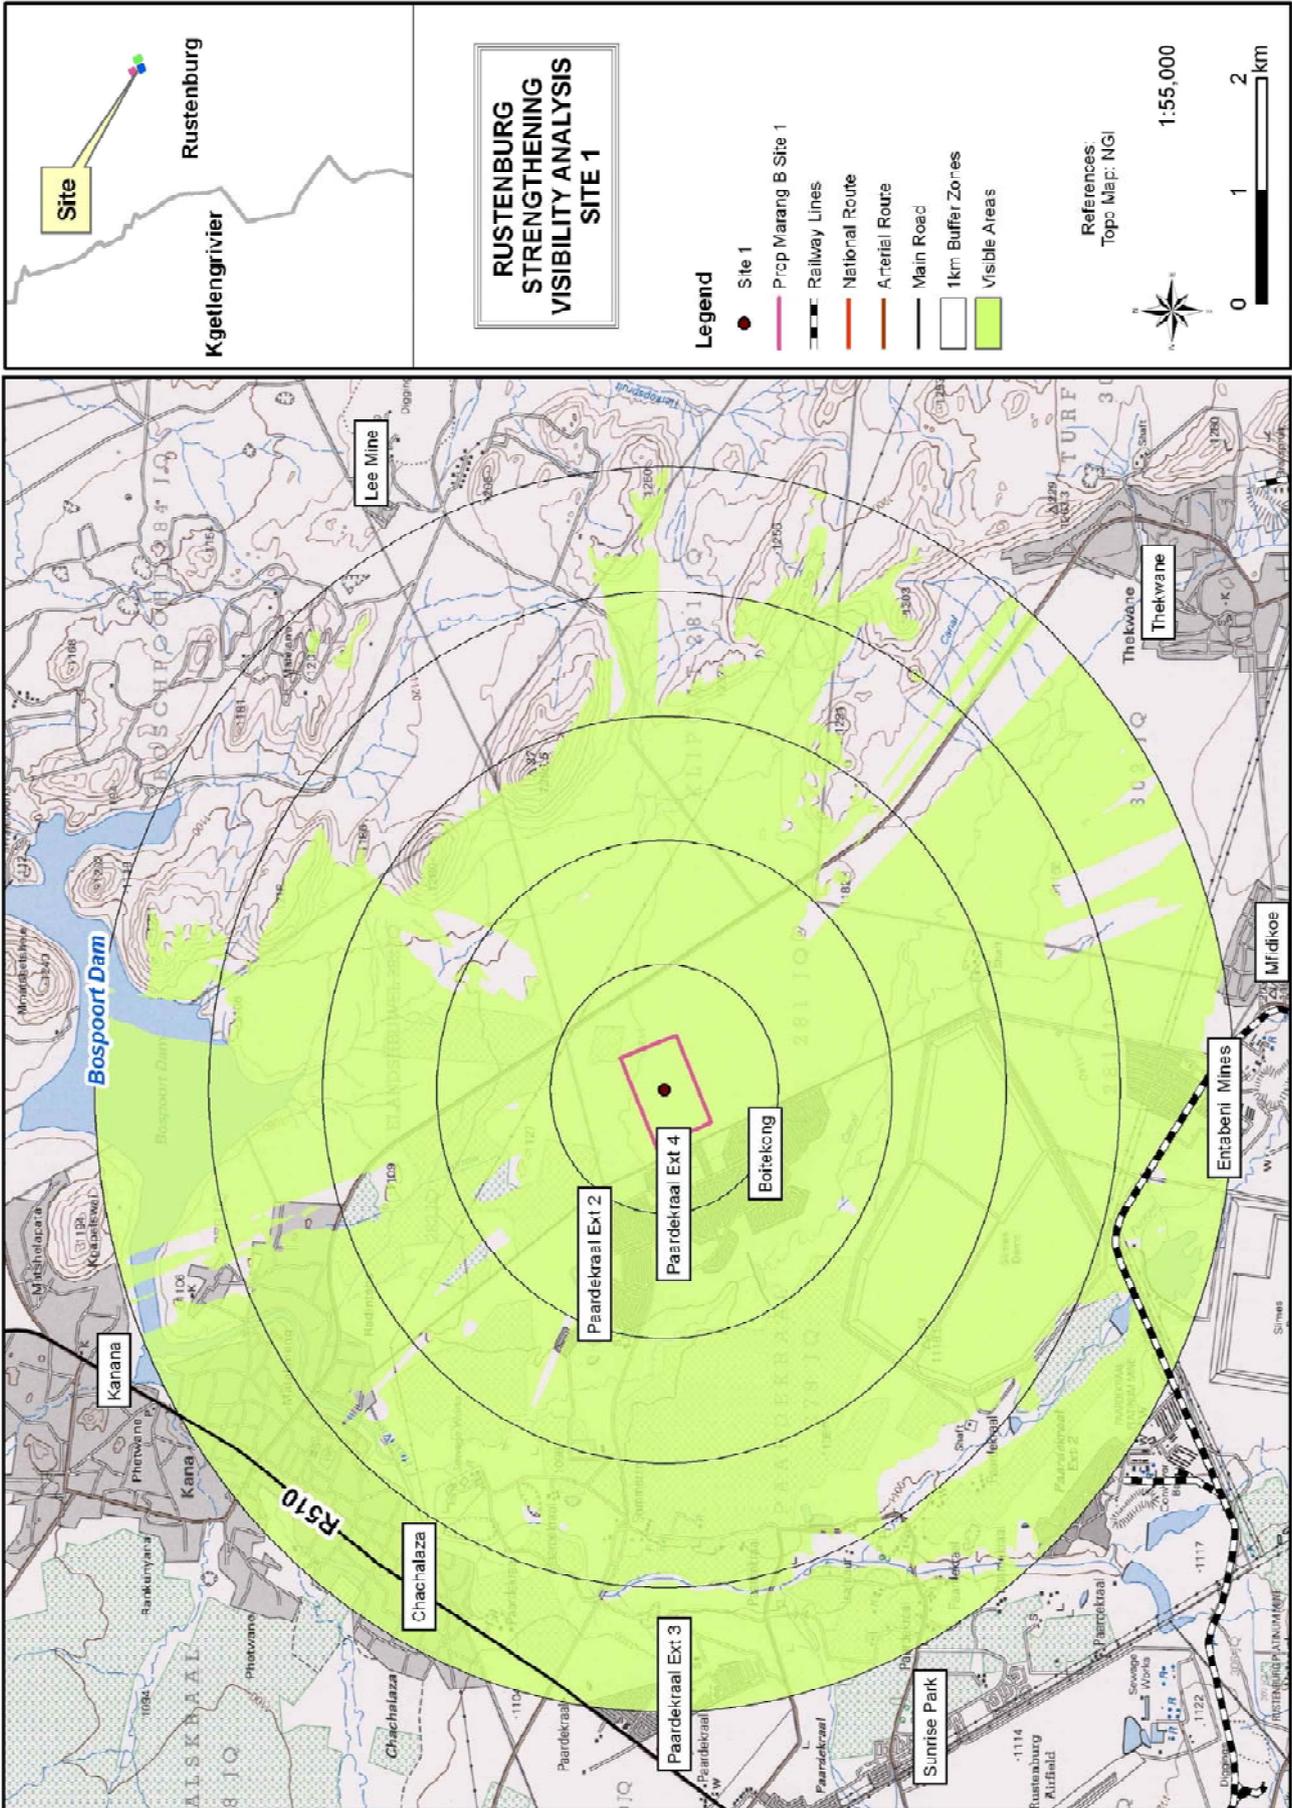


Figure 12: Marang B Site 2




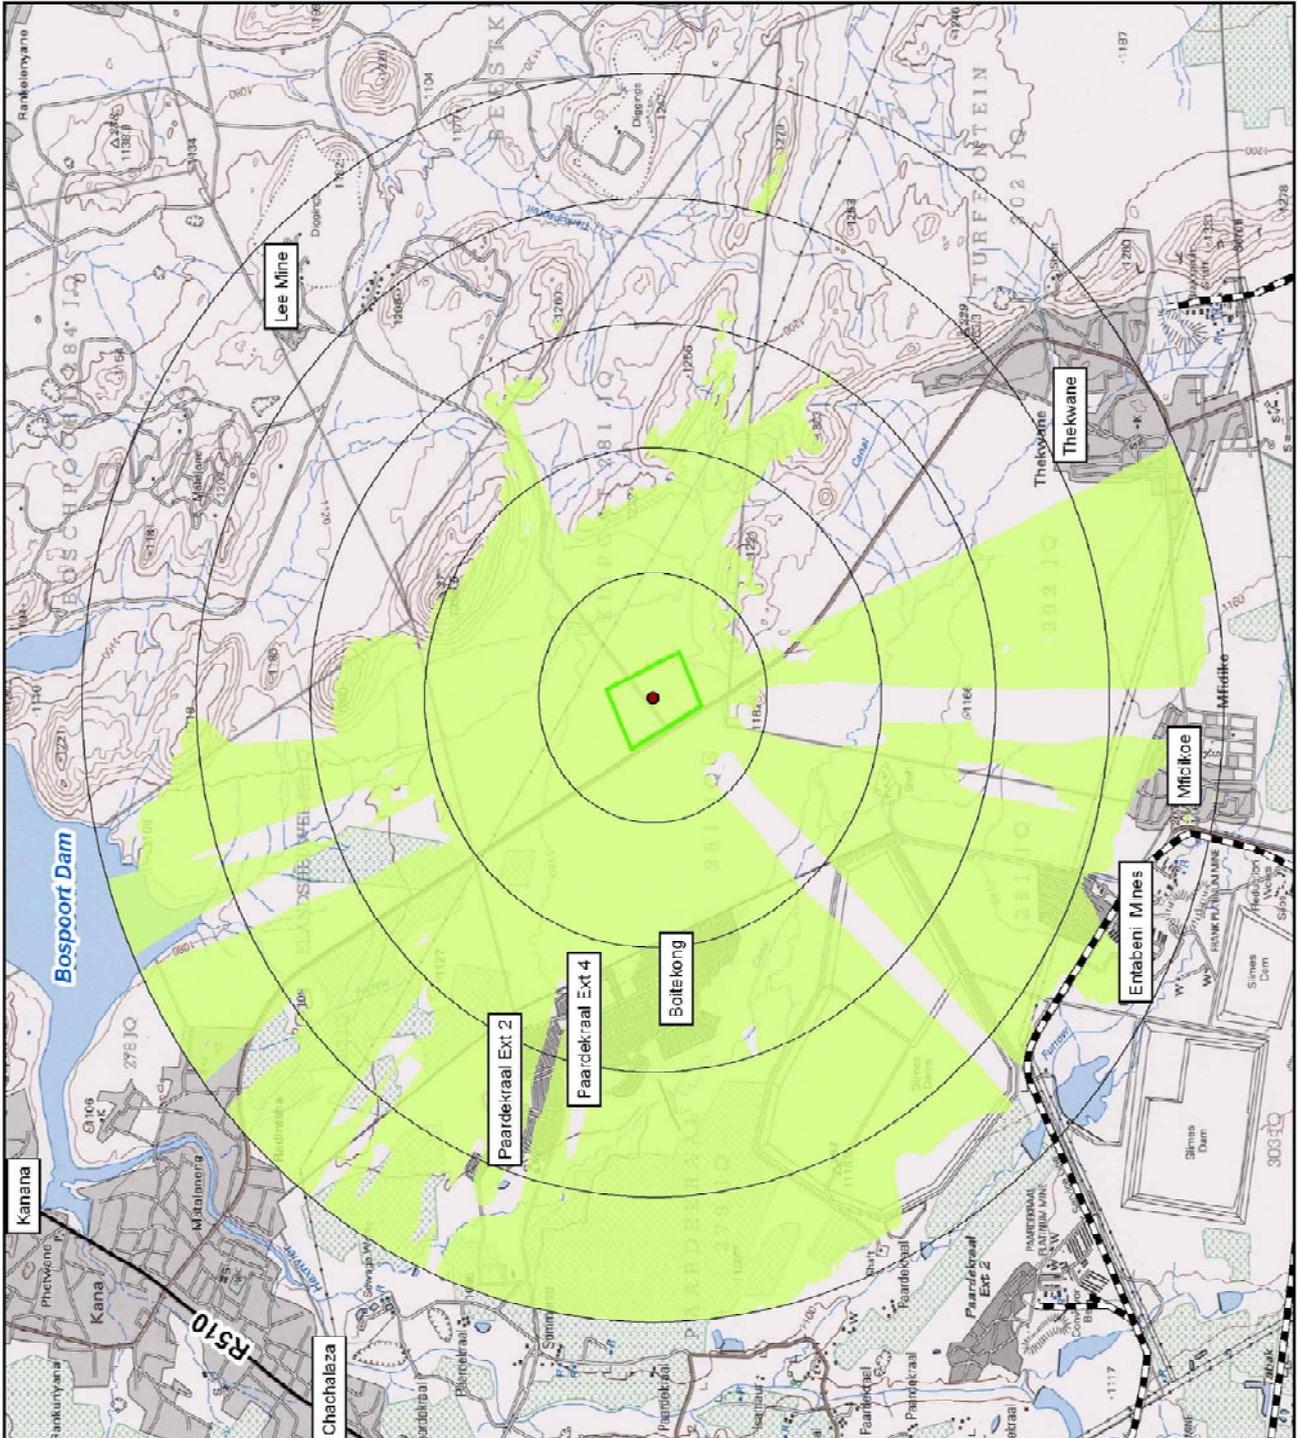


Figure 13: Marang B Site 3

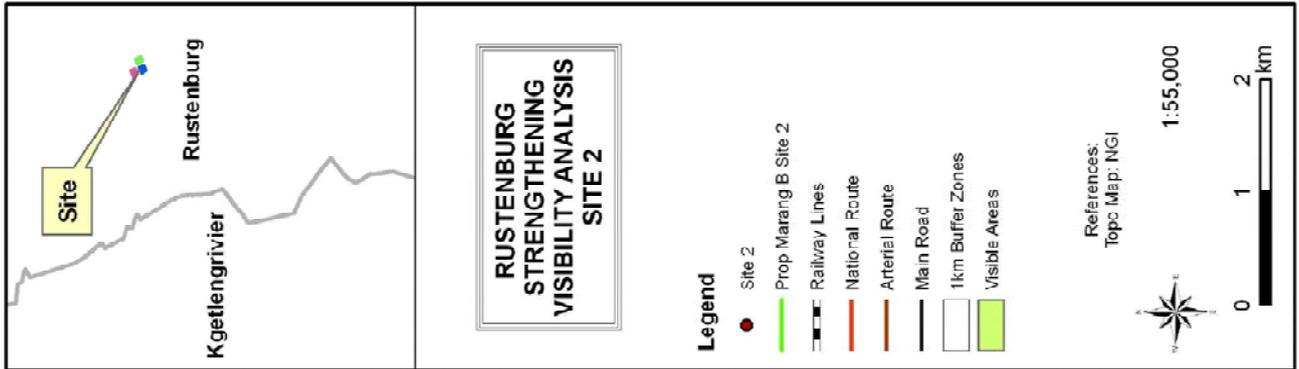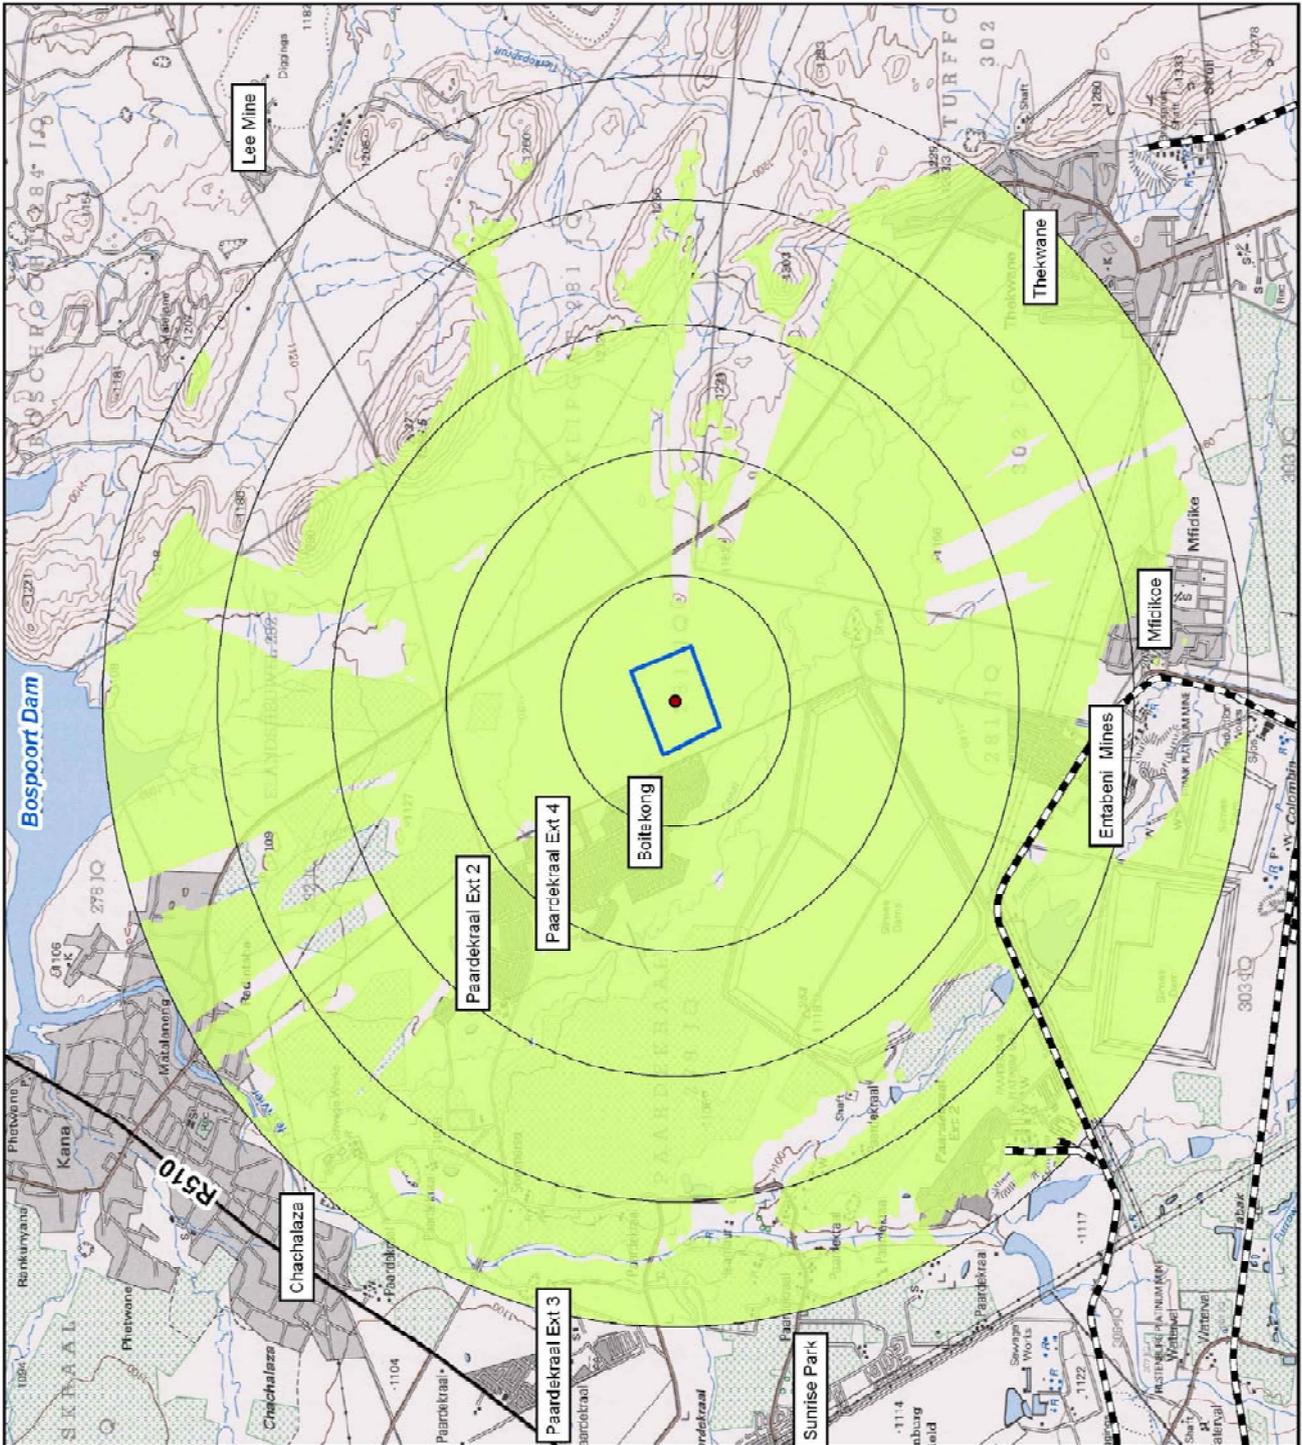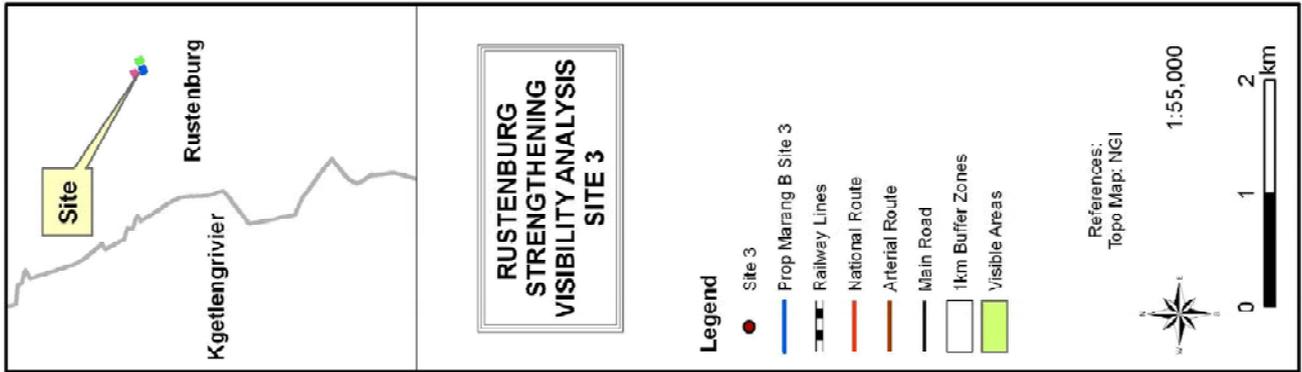

## GLOSSARY OF TERMS

<b>Aesthetics</b>	The science or philosophy concerned with the quality of sensory experience. (ULI, 1980)
<b>Horizon contour</b>	A line that encircles a development site and that follows ridgelines where the sky forms the backdrop and no landform is visible as a background. This is essentially the skyline that when followed through the full 360-degree arc as viewed from a representative point on the site defines the visual envelope of the development. This defines the boundary outside which the development would not be visible.
<b>Landscape characterisation/ character</b>	This covers the gathering of information during the desktop study and field survey work relating to the existing elements, features, and extent of the landscape (character). It includes the analysis and evaluation of the above and the supporting illustration and documentary evidence.
<b>Landscape condition</b>	Refers to the state of the landscape of the area making up the site and that of the study area in general. Factors affecting the condition of the landscape can include the level maintenance and management of individual landscape elements such as buildings, woodlands etc and the degree of disturbance of landscape elements by non-characteristics elements such as invasive tree species in a grassland or car wrecks in a field.
<b>Landscape impact</b>	Changes to the physical landscape resulting from the development that include; the removal of existing landscape elements and features, the addition of new elements associated with the development and altering of existing landscape elements or features in such as way as to have a detrimental effect on the value of the landscape.
<b>Landscape unit</b>	A landscape unit can be interpreted as an “outdoor room” which are enclosed by clearly defined landforms or vegetation. Views within a landscape unit are contained and face inward.
<b>Sense of place</b>	That distinctive quality that makes a particular place memorable to the visitor, which can be interpreted in terms of the visual character of the landscape. A more emotive sense of place is that of local identity and attachment for a place “ <i>which begins as undifferentiated space [and] becomes place as we get to know it better and endow it with value</i> ” (Tuan 1977) <sup>1</sup> .
<b>Viewer exposure</b>	The extent to which viewers are exposed to views of the landscape in which the proposed development will be located. Viewer exposure considers the visibility of the site, the viewing conditions, the viewing distance, the number of viewers affected, the activity of the viewers (tourists or workers) and the duration of the views.
<b>Viewer sensitivity</b>	The assessment of the receptivity of viewer groups to the visible landscape elements and visual character and their perception of visual quality and value. The sensitivity of viewer groups depends on their activity and awareness within the affected landscape, their preferences, preconceptions and their opinions.
<b>Visual absorption capacity (VAC)</b>	The inherent ability of a landscape to accept change or modification to the landscape character and/or visual character without diminishment of the visual quality or value, or the loss of visual amenity. A high VAC rating implies a high ability to absorb visual impacts while a low VAC implies a low ability to absorb or conceal visual impacts.

<sup>1</sup> Cited in Climate Change and Our 'Sense of Place', <http://www.ucsus.org/greatlakes/glimpactplace.html>

<b>Visual amenity</b>	The notable features such as hills or mountains or distinctive vegetation cover such as forests and fields of colour that can be identified in the landscape and described. Also included are recognised views and viewpoints, vistas, areas of scenic beauty and areas that are protected in part for their visual value.
<b>Visual character</b>	This addresses the viewer response to the landscape elements and the relationship between these elements that can be interpreted in terms of aesthetic characteristics such as pattern, scale, diversity, continuity and dominance.
<b>Visual contour</b>	The outer perimeter of the visual envelope determined from the site of the development. The two dimensional representation on plan of the horizon contour.
<b>Visual contrast</b>	The degree to which the physical characteristics of the proposed development differ from that of the landscape elements and the visual character. The characteristics affected typically include: <ul style="list-style-type: none"> <li>• Volumetric aspects such as size, form, outline and perceived density;</li> <li>• Characteristics associated with balance and proportion such scale, diversity, dominance, continuity;</li> <li>• Surface characteristics such as colour, texture, reflectivity; and</li> <li>• Luminescence or lighting.</li> </ul>
<b>Visual envelope</b>	The approximate extent within which the development can be seen. The extent is often limited to a distance from the development within which views of the development are expected to be of concern.
<b>Visual impact</b>	Changes to the visual character of available views resulting from the development that include: obstruction of existing views; removal of screening elements thereby exposing viewers to unsightly views; the introduction of new elements into the view shed experienced by visual receptors and intrusion of foreign elements into the view shed of landscape features thereby detracting from the visual amenity of the area.
<b>Visual impact assessment</b>	A specialist study to determine the visual effects of a proposed development on the surrounding environment. The primary goal of this specialist study is to identify potential risk sources resulting from the project that may impact on the visual environment of the study area, and to assess their significance. These impacts include landscape impacts and visual impacts.
<b>Visual quality</b>	An assessment of the aesthetic excellence of the visual resources of an area. This should not be confused with the value of these resources where an area of low visual quality may still be accorded a high value. Typical indicators used to assess visual quality are vividness, intactness and unity. For more descriptive assessments of visual quality attributes such as variety, coherence, uniqueness, harmony, and pattern can be referred to.
<b>Visual receptors</b>	Includes viewer groups such as the local community, residents, workers, the broader public and visitors to the area, as well as public or community areas from which the development is visible. The existing visual amenity enjoyed by the viewers can be considered a visual receptor such that changes to the visual amenity would affect the viewers.
<b>Zone of visual influence</b>	The extent of the area from which the most elevated structures of the proposed development could be seen and may be considered to be of interest (see visual envelope).

## LEVEL OF CONFIDENCE

**Table 8: Confidence level chart and description**

CONFIDENCE LEVEL CHART				
		Information, knowledge and experience of the <b>project</b>		
		3b	2b	1b
Information, and knowledge of the <b>study area</b>	3a	9	6	3
	2a	6	4	2
	1a	3	2	1

3a – A *high* level of information is available of the **study area** in the form of recent aerial photographs, GIS data, documented background information and a thorough knowledge base could be established during site visits, surveys etc. The study area was readily accessible.

2a – A *moderate* level of information is available of the **study area** in the form of aerial photographs GIS data and documented background information and a moderate knowledge base could be established during site visits, surveys etc. Accessibility to the study area was acceptable for the level of assessment.

1a – *Limited* information is available of the **study area** and a poor knowledge base could be established during site visits and/or surveys, or no site visit and/or surveys were carried out.

3b – A *high* level of information and knowledge is available of the **project** in the form of up-to-date and detailed engineering/architectural drawings, site layout plans etc. and the visual impact assessor is well experienced in this type of project and level of assessment.

2b – A *moderate* level of information and knowledge is available of the **project** in the form of conceptual engineering/architectural drawings, site layout plans etc. and/or the visual impact assessor is moderately experienced in this type of project and level of assessment.

1b – *Limited* information and knowledge is available of the **project** in the form of conceptual engineering/architectural drawings, site layout plans etc. and/or the visual impact assessor has a low experience level in this type of project and level of assessment. (Adapted from Oberholzer. B, 2005)

## VISUAL RECEPTOR SENSITIVITY

Table 9: Visual receptor sensitivity

<b>VISUAL RECEPTOR SENSITIVITY</b>	<b>DEFINITION (BASED ON THE GLVIA 2<sup>ND</sup> ED PP90-91)</b>
<b>Exceptional</b>	Views from major tourist or recreational attractions or viewpoints promoted for or related to appreciation of the landscape, or from important landscape features.
<b>High</b>	Users of all outdoor recreational facilities including public and local roads or tourist routes whose attention or interest may be focussed on the landscape; Communities where the development results in changes in the landscape setting or valued views enjoyed by the community; Residents with views affected by the development.
<b>Moderate</b>	People engaged in outdoor sport or recreation (other than appreciation of the landscape);
<b>Low</b>	People at their place of work or focussed on other work or activity; Views from urbanised areas, commercial buildings or industrial zones; People travelling through or passing the affected landscape on transport routes.
<b>Negligible (Uncommon)</b>	Views from heavily industrialised or blighted areas

## REFERENCES

BLM (Bureau of Land Management). (1986). Handbook H-8431-1, Visual Resource Contrast Rating. U.S. Department of the Interior BLM. <http://www.blm.gov/nstc/VRM/vrmsys.html>

Government Office of the South West - England (2006). Using landscape sensitivity for renewable energy. Revision 2010 – Empowering the region [Online]. [http://www.oursouthwest.com/revision2010/lca\\_methodology\\_windbiomass.doc](http://www.oursouthwest.com/revision2010/lca_methodology_windbiomass.doc) [Accessed 8 November 2006]

Landscape Institute and the Institute of Environmental Assessment and Management. (2002). Guidelines for Landscape and Visual Impact Assessment (GLVIA). Second Edition, E & FN Spon Press.

M. Hill, J. Briggs, P. Minto, D. Bagnall, K. Foley, A. Williams. (March 2001). Guide to Best Practice in Seascape Assessment. Maritime (Ireland / Wales) INTERREG Programme- Building Bridges.

Oberholzer, B. (2005). Guideline for involving visual and aesthetic specialists in EIA processes: Edition 1. CSIR Report No ENV-S-C 2005 053 R. Republic of South Africa, Provincial Government of the Western Cape, Department of Environmental Affairs and Development Planning, Cape Town.

Swanwick, C. Department of Landscape, University of Sheffield and Land Use Consultants. (2002). Landscape Character Assessment:: Guidance for England and Scotland. The Countryside Agency / Scottish Natural Heritage.

Van Riet, W., Claassens, P., Van Rensburg, J., Van Viegen, T., Du Plessis, L. 1997. *Environmental Potential Atlas for South Africa*. The Department of Environmental Affairs and Tourism in conjunction with The Geographic Information Systems Laboratory CC and the University of Pretoria. J.L. van Schaik.

Van Rooyen, M.W. 2002. Management of the old field vegetation in the Namaqua National Park, South Africa: conflicting demands of conservation and tourism. Published paper from *The Geographical Journal*, Vol. 168, No.3, September 2002, pp. 211-223.

U.S.D.O.T., Federal Highway Administration, Office of Environmental Policy. (March 1981). Visual Impact Assessment for Highway Projects. U. S. Department of Transportation Washington D. C.

Urban Land Institute, 1980. Visual Resource Management 0510-1: Environmental Comment (May 1980). Washington D.C.