

Drinking Yoghurt:

Agricultural processing brochure

South African farmers facing current economic realities are searching for new options to maintain or expand their businesses. One of the many opportunities to grow markets, turnover and profits is by adding value to farm produce. Options need to be selected carefully based on sound information and knowledge of the opportunities presenting themselves, taking into account the strengths and weaknesses of individual farms.

Introduction:

Product group: Dairy products

Dairy milk is one of the most versatile products available to the processor. Processing options include fermenting, concentrating, drying, freezing and many more methods of preservation. Processed dairy products are divided into five groups:

- Concentrated dairy products
- Cultured dairy products
- Frozen dairy products
- Liquid dairy products
- Powdered dairy products



Yoghurt is categorised
as a
cultured dairy product.

 Eskom

Product description: Drinking yoghurt

Yoghurt is categorised as a cultured dairy product which is obtained from pasteurised milk or reconstituted milk that has been inoculated with yoghurt culture, and allowed to ferment under controlled conditions to develop a characteristic flavour and texture.

Drinking yoghurt has a low solids content (maximum of 11%) that has undergone a post-

fermentation homogenisation process to further reduce the viscosity. It may be pasteurised after fermentation to ensure a shelf life of several weeks. It may also be aseptically processed and packaged to ensure a shelf life of several months. Drinking yoghurt is classified according to its fat content and can be high fat (> 4.5%), full fat (3.5 – 4.5%), low fat (1.5 - 2.5%) or fat-free (< 0.5%).

Yield: 1.04 kg of whole raw milk will yield approximately 1 kg of drinking yoghurt.

Storage of raw milk for processing

Milk is a highly perishable product that may turn sour if left at room temperature. Milk is cooled to improve its quality and stability. Milk leaves the cow at $\pm 37^{\circ}\text{C}$ and must be cooled within 3 hours to 4°C . During cold storage, the milk must be stirred gently to prevent a cream layer from forming on top (cream separation by gravity).

Raw milk is thus kept in large vertical tanks at the factory or processing plant, which is fitted with one or more propeller agitator(s) until further processing proceeds.



Milk preparation for the manufacturing of drinking yoghurt

Clarification of milk

Clarification is the removal of solid impurities (dirt particles, white blood cells and cells of udder tissue) from the milk, prior to further processing. Clarification is achieved through filtration. Milk may be filtered through a perforated strainer, fine-wire mesh or woven cloth ("melkdoek") in small dairies. Medium and large dairies use replaceable in-line filters situated before the heat exchanger.

Pre-heating of milk for separation

Prior to separation the milk is heated to 45 - 60°C to ensure effective separation of the skim milk and cream phase. Heating also inactivates the enzyme lipase that is responsible for the development of rancidity in fats. Pre-heating guarantees the highest possible cream quality, i.e. the lowest amount of free fat in skim milk. Heating takes place in a batch vessel or in a plate heat exchanger.

Fast facts:

Fresh milk should be cooled to: **4 °C**

Prior to separation the milk is heated to: **45 - 60 °C**

Separation and standardisation of milk for yoghurt

Separation: The cream fraction of raw milk is separated from the skim milk by passing pre-heated raw milk (45 – 60°C) through a conventional or hermetic centrifugal separator.

Standardisation follows directly after separation and involves the adjustment of the fat content of milk to obtain a product with a defined, guaranteed fat content. Yoghurt products are classified according to their fat content. The fat content of milk must therefore be adjusted and standardised

accordingly since the fat content of raw milk varies. Standardisation is preceded by separation of the milk and cream and then re-mixing the two fractions in the desired proportions.

Take note: Fat-free drinking yoghurt is made from skim milk and does not require re-mixing only separation.

Fortification and stabilisation of milk for yoghurt

Fortification is the enrichment or increase of the nutritional value of food by either a general addition to increase the overall nutritional value or by adding specific

substances (e.g. proteins, vitamins etc.). The yoghurt-milk is generally fortified with skimmed milk powder, stabilisers and sugars.

- The solid-non-fat (SNF) content of the milk must be raised by 1.5 - 3%. The milk is therefore fortified by adding skimmed milk powder.
- Water binding stabilisers (hydrocolloids) that increase the viscosity and reduce whey separation of the final product are used. The stabilisers used must be in accordance with legal requirements.

- Sugar or other forms of sweetener is an optional ingredient that may be added at this stage.

Homogenisation of milk for yoghurt (optional)

Homogenisation is the process where the fat globules in cream (or milk) are disintegrated or finely and homogeneously distributed to reduce creaming or prevent fat separation. It can be considered as a special method of emulsification.

The diameter of the fat globules is reduced and their ability to separate is lowered, making the homogenised product very stable. The homogenisation head consists of a high-pressure positive pump that forces the cream through a narrow gap in a specially designed valve. The high pressure (15 – 25 MPa) on the inlet side causes the fat globules in the cream to break up. Homogenisation takes place at the first homogenising head. The second head, which operates at a lower pressure and is used to break up any clusters of fat globules, is also recommended.



Drinking yoghurt process


1. Pasteurisation of milk for yoghurt

Pasteurisation is generally defined as a mild heat treatment that destroys all vegetative pathogens and heat sensitive enzymes. Pasteurisation of milk for yoghurt is done at relatively high temperatures in order to denature the whey proteins and to form complexes between milk proteins, and therefore increase the water binding properties and increase the viscosity of the product.

Various pasteurisation methods available, depending on the size of the processing plant:

Batch pasteurisation: This method is suitable for small operations with less than 2500 litres of milk per day. The milk is pumped into an open vat or jacketed vat fitted with an agitator where it is heated.

Process overview

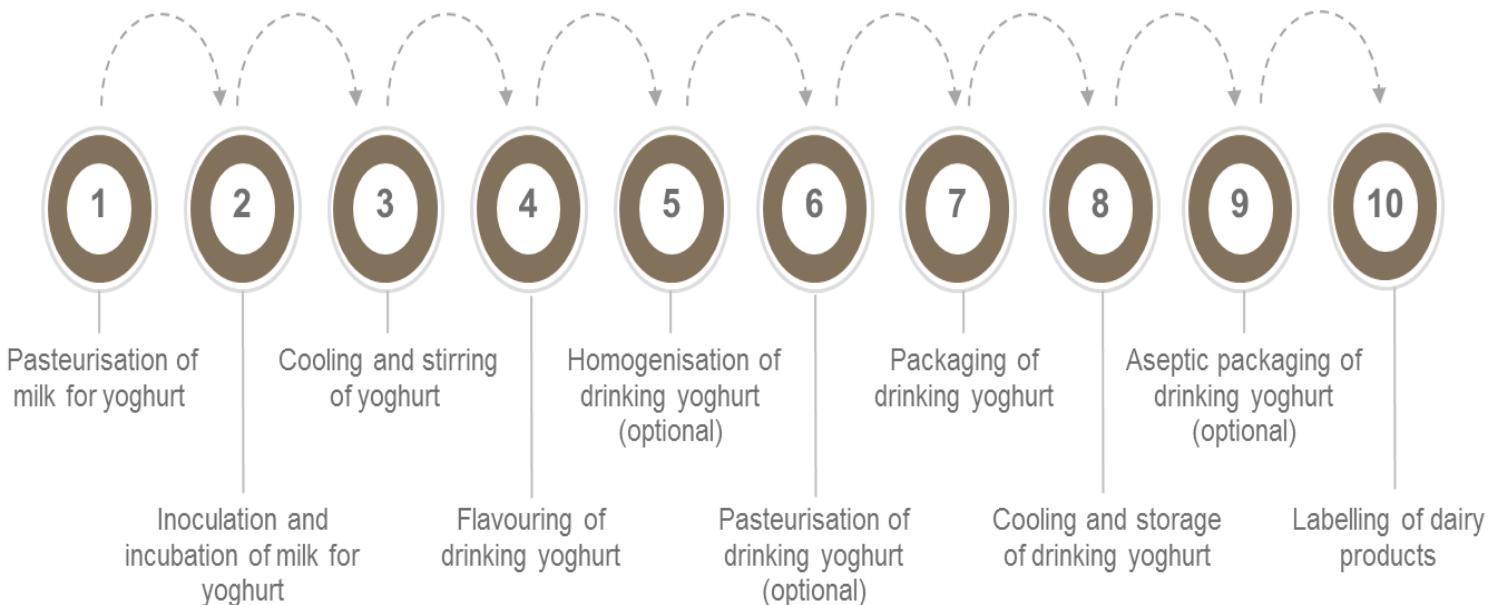

The milk is held at least 30 minutes at 85.5°C followed by cooling within 30 minutes to 43 - 45°C.

Continuous pasteurisation: Large processing plants make use of a continuous High Temperature Short Time (HTST) method. Milk is heated quickly to 90 - 95°C for 15 - 40 seconds in a plate heat exchanger. This is a compact, simple, easily cleaned and economic heating device since it uses the hot pasteurised milk to pre-heat the incoming cold milk (and vice versa), i.e. makes use of energy regeneration. The pasteuriser consists of series of stainless steel plates mounted vertically, supported by cylindrical bars, and are tightly packed and sealed together. The plates have waffle-like indentations that provide a large heat transfer area and a turbulent flow of the liquids.



A rubber-seal between the plates keep them about 5 - 8 mm apart. The liquids leave the plates through holes in the corners of the plates. Open and blind holes route the liquids to the correct plate processing area. Five stages of heat exchange can be identified:

- **Regenerative heating:** The incoming milk is pumped to the regeneration section of the heat exchanger where it is heated to 55 - 65°C by heat transfer from freshly pasteurised milk. Up to 92% of required heat can be recovered in this way. Milk may leave the pasteuriser at this stage to be homogenised and return to the next section.

<p>Fast facts:</p>	<p>Small operations: Batch pasteurisation</p>	<p>Large operations: Continuous pasteurisation</p>
---------------------------	--	---

- **Heating:** Milk is further heated indirectly with hot water, vacuum steam or saturated steam at atmospheric pressures to the required temperature (90 - 95°C).
- **Holding:** The hot milk is held at the required temperature in a chamber or a holding pipe for the required period of time (15 - 40 seconds). The dimensions of the holding pipe must be sufficient to ensure the required residence time and flow rate of the milk. The stainless steel holding pipe slopes upwards and excludes trapped air. The temperature at the end

of the pipe is continuously monitored to ensure sufficient pasteurisation. If the required temperature is not maintained for long enough, the milk is returned to the heating and/or holding sections via the flow diversion valve.

- **Regenerative cooling:** The hot milk from the holding section goes to the regeneration section where it is cooled to 50 - 60°C by heat transfer to the incoming milk.
- **Cooling:** Milk is further cooled to 43 - 45°C, first with cold water and finally with chilled water or refrigerant (brine or

polyalcohol solutions). The higher the fat content of the milk, the higher the final temperature of the cooled milk will be. This prevents the milk from thickening, resulting in clogging of pipelines and filling problems. The mechanical action involved in pumping and filling thick, cold milk could also cause damage to the fat globules.

Take note: It is required by law in South Africa that processors keep thermographic recordings of the temperature of pasteurisation for at least four weeks; and that apparatus used must be calibrated monthly to ensure the correctness of the pasteurisation process.

2. Inoculation and incubation of milk for yoghurt

Inoculation is the addition of starter cultures to a food substance to initiate fermentation reactions. The warm milk (42°C) is pumped into the fermentation tank and inoculated with a starter culture mixture containing *Streptococcus thermophilus* and *Lactobacillus delbrueckii* subspecies *bulgaricus*. The milk and starter culture are mixed thoroughly to ensure even dispersion of the culture in the milk.

The inoculated milk is incubated for 5 - 7 hours to allow fermentation to take place until the pH is reduced to 4.5. Fermentation is defined as the conversion of the milk sugar (lactose) into simpler substances such as acids through the action of the starter culture and enzymes. The fermentation tanks are insulated to ensure that an even temperature is maintained throughout the incubation period.



3. Cooling and stirring of yoghurt

When the coagulated milk has reached the required pH, it must be cooled to 15 – 22°C. This prevents further culture activity, stabilises the pH and ensures a stable texture. Cooling takes place in the fermentation vat by replacing the heating medium (hot water) with cold water. At the same time, the hot coagulated product is gently stirred (“striked”) with minimum shear to the product. Striking breaks the curd and re-incorporates the whey. It also retards culture activity and slows the souring rate to reduce the risk of over-fermentation. Cooling renders the proteins less sensitive to agitation and makes it favourable for the addition of mixed fruit, flavourings and additional ingredients.

Fast

facts:

Inoculated milk is incubated for:

Hours:

5 - 7

pH reduced to:

4.5

4. Flavouring of drinking yoghurt

Drinking yoghurt is flavoured with pasteurised fruit puree, sugar, flavouring and colouring. Fruit juice may also be added to reduce the solids content and liquefy the product. Stabilisers may be added to prevent protein aggregation, which may result in a chalky / dry mealy texture and to prevent protein precipitation.

5. Homogenisation of drinking yoghurt (optional)

The flavoured drinking yoghurt can be homogenised

at 55°C at a pressure of 150 - 204 bar to ensure even dispersion of all added ingredients and to produce a smooth consistency. The technique used is the same as that used for milk.

6. Pasteurisation of drinking yoghurt (optional)

Drinking yoghurt is usually pasteurised before packaging to extend the shelf life. The process follows the same procedures and processing parameters as pasteurisation of the raw milk. Post-fermentation pasteurisation

inactivates the starter culture and eliminates most yeast, moulds and enzymes that may be present in the drinking yoghurt prior to packaging.

7. Packaging of drinking yoghurt

Packaging is defined as the containment of a food product in a protective barrier that prepares goods for transport, distribution, storage, retailing and end-use.

The pasteurised drinking yoghurt is hot-filled (55 – 65°C) into suitable

containers and hermetically sealed. Suitable containers include plastic bottles with foil or screw-on lids; or laminated gable-top carton boxes.

8. Cooling and storage of drinking yoghurt

The sealed containers are cooled to below 15°C in cooling tunnels and placed in refrigerated storage. The product is placed in cold storage rooms to reduce its temperature to 12°C and thus extend the keeping quality.

9. Aseptic packaging of drinking yoghurt (optional)

Aseptic packaging entails the filling of a sterilised product into pre-sterilised containers and sealing under aseptic conditions. The pasteurised drinking yoghurt may also be aseptically filled and sealed in laminated carton containers to extend the shelf life even further. The sealed containers are cooled aseptically to below 15°C. The aseptic product does not require refrigerated storage prior to opening.

10. Labelling of dairy products

The containers are labelled/printed with the necessary information. Labelling in South Africa is controlled by legislation. Anyone who wants to use the information provided in this document must familiarise him/herself with all the applicable laws that apply to the producing, processing, manufacturing and storage of the products referred to in this document.



Other processing options – Cultured dairy products

Listed below are other processing options not covered in this report, but available from Eskom.

- **Cultured buttermilk** is the product obtained from milk that has been inoculated with a starter culture to produce a viscous liquid with a mild lactic flavour. It is consumed as a refreshing drink or used as an ingredient in various baked products.
- **Gouda** is a close textured, mild cheese. It is classified as semi-hard.
- **Kefir** is a smooth, viscous, fermented dairy drink with a fresh acidic taste and contains lactic acid, alcohol ($\pm 1\%$) and gas (carbon dioxide).
- **Maas (cultured milk)** is manufactured by inoculating pasteurised milk with a specific bacterial culture. The end product has a firm texture, no gas bubbles and no separation of whey from the coagulum. It has pleasant sour taste with a slight bite/prickliness on the tongue.
- **Processed cheese** is made from a variety of natural cheeses that are ground and blended together with emulsifying agents. Various other additives may also be added. The mixture is heated and packaging in laminated films.
- **Ricotta** is a cheese prepared from whey. Ricotta is a low fat, soft cheese with a maximum fat in dry matter content of 10% and a minimum dry matter of 20%.
- **Stirred yoghurt** is a fermented milk product with a thick, smooth consistency and may or may not be flavoured. It is incubated in tanks, stirred, flavoured and cooled before packaging.
- **Cultured (sour) cream** is the product obtained from cream that has been inoculated with a starter culture to allow for the development of lactic acid and flavour compounds under controlled conditions.
- **Cheese spread** is a blend of hard cheese with added emulsifying salts. The mixture undergoes a heat treatment that increases the shelf life. Cheese spread has relatively high moisture content ($\pm 55\%$) and a pH of 5.7 – 6.3.
- **Cheddar cheese** is defined as the product obtained from coagulated milk from which the whey has been removed. The coagulum or curd has undergone ripening to a greater or lesser extent. Cheddar is classified as a high fat, hard cheese.

Energy Advisory Services

Eskom's role is to aid the client with basic information in the decision-making process. Thereafter the Eskom Advisor will fulfil the role of energy advisor as part of the team that the farmer selects.

Optimise your energy use

Eskom's Energy Advisors, in regions across South Africa, offer advice to business customers on how to optimise their energy use by:

- Understanding their energy needs
- Understanding their electrical systems and processes
- Investigating the latest technology and process developments, including electric infrared heating and drying systems
- Analysing how to reduce energy investment costs
- Optimising energy use patterns in order to grow businesses and industries

Call 08600 37566, leave your name and number and request that an Energy Advisor in your region contacts you. Alternatively, e-mail an enquiry to advisoryservice@eskom.co.za.

Alternative funding:

Five alternative funding product offerings are available to help reduce your investment costs for new agro-processing or agro-beneficiation business or expand/improve an existing agro-processing or agro-beneficiation business.

For more info visit: <http://www.eskom.co.za/sites/idm/Business/Pages/Alternativefunding.aspx>

Literature sources

- Catsberg, C.M.E. & Kempen van Dommelen, G.J.M. 1990. Food Handbook. New York: Ellis Horwood.
- Dairy Processing Handbook. 1995. Tetra Pak Processing Systems. Sweden. Early, R. 1992. The Technology of Dairy Products. London: Blackie.
- Robinson, R.K. 1994. Modern Dairy Technology. Vol 2. Advances in Milk Products. 2nd ed. London: Chapman & Hall.
- Rosenthal, I. 1991. Milk and dairy products: properties and processing. Basel : VCH.
- South Africa - Agricultural Products Standards Act (No 119 of 1990) and regulations. Pretoria: Government Printers.
- South African - Foodstuffs, Cosmetics and Disinfectant Act (no 54 of 1972) and regulations. Johannesburg: Lex Patria
- Varnan, A .H. & Sutherland, J.P. 1994. Milk and Milk Products: Technology, chemistry and microbiology. London: Chapman & Hall.



Disclaimer

The reader's attention is drawn to this notice which contains a limitation of risk or liability of Eskom, and constitutes an assumption of risk or liability by the reader or an indemnification of Eskom. The reader acknowledges that he/she has made him/herself aware of this disclaimer and is aware that the disclaimer limits the liability of Eskom.

The aim of this document is solely to provide the reader with some basic information on agro processing in order to understand the extent of the operations involved.

The reader should familiarise him/herself with all applicable laws that apply to the product growing, storage, processing and manufacturing. This information concentrates on the sequence and steps involved in the processing of the selected product and explain the reason and necessity of each step. It is not a complete reference document on which calculation and design shall be based, nor was it ever intended to be.

While Eskom has made every attempt to ensure that the information contained in this brochure has been obtained from reliable sources, Eskom does not accept any responsibility or liability for the accuracy, content, completeness, legality, or reliability of the information contained in this brochure, and the readers or users are required to also make their own independent enquiry, before relying upon same. All information in this brochure is provided "as is" with no warranties, promises and/or representations of any kind, expressed or implied, as to the nature, standard, accuracy or otherwise of the information provided in this brochure nor to the suitability or otherwise of the information for a purpose. Computer generated images, walkthroughs and render images used in this brochure are the artist's impression and are an indicative of the actual designs. The imagery used in the brochure may not represent actuals.

Eskom shall not be liable to the reader for any loss or damage of whatever nature (direct, indirect, consequential, or other) incurred by the reader as a result of any action or omission related to the information provided in this brochure. The reader shall indemnify Eskom against any claim or action instituted by a third party as a consequence of the actions taken in relation to the contents of the brochure, emanating from any area of law.



For more information on Eskom's solutions and services visit the website - www.eskom.co.za/idm

