



## SCHEDULE OF STANDARD PRICES FOR ESKOM TARIFFS 1 APRIL 2021 TO 31 MARCH 2022 FOR NON-LOCAL AUTHORITY SUPPLIES, AND 1 JULY 2021 TO 30 JUNE 2022 FOR LOCAL AUTHORITY SUPPLIES

### 1. Standard prices

The standard prices contained in this schedule to be charged by Eskom for electricity supplied or made available by Eskom to customers, shall, subject to the provisions of the Electricity Regulation Act (Act No 4 of 2006), or its successor-in-title, be as set out hereunder.

These terms, conditions and prices contained in this schedule are the official tariffs approved by NERSA and are valid until Eskom's next price increase or tariff changes as approved by NERSA from time to time.

### 2. Definitions and abbreviations

#### 2.1. Definitions

For the purpose of this Schedule the following words and phrases shall have the same meanings as assigned to them herein:

**Account** means the invoice received by a customer for a single **POD/point of supply** or if consolidated, multiple **points of delivery/supply** for electricity supplied and/or use of the **System**.

**Active energy charge or energy charge** means the charge for each unit of energy consumed, typically charged for as c/kWh.

**Administration charge** means the daily fixed charge payable per **POD/point of supply/service agreement** to recover administration-related costs such as meter reading, billing and meter capital. It is based on the **monthly utilised capacity** or **monthly maximum exported capacity** per **POD/point of supply/service agreement**.

**Affordability subsidy charge** means the transparent charge indicating socio-economic subsidies related to the supply of electricity to **residential tariffs** and is payable on Eskom related active energy sales to **non-local authority tariffs**.

**Ancillary Service charge** means the charge that recovers the cost of providing ancillary services by the System Operator.

**Annual utilised capacity** means the higher of the **notified maximum demand (NMD)** or the **maximum demand**, per **POD/point of supply** measured in kVA, and registered during a rolling 12-month period.

**Annual maximum export capacity** means the higher of the notified **maximum export capacity (MEC)** or the actual **maximum exported capacity**, per **point of supply** measured in kW, and registered during a rolling 12-month period.

**Chargeable demand** means the highest average demand measured in kVA in a billing month during the chargeable time periods specified for each tariff. For WEPS, Megaflex and Megaflex Gen, the chargeable period is during these tariffs peak and standard periods and for Nightsave Urban (Large and Small) and Nightsave Rural during Nightsave's peak periods.

**Code** means the Distribution Code, the South African Grid Code, the Grid Connection Code for Renewable Power Plants or any other code, published by NERSA, as applicable, and as amended, modified, extended, replaced or re-enacted from time to time.

**Distribution** means the regulated business unit through which Eskom constructs, owns, operates and maintains the **Distribution System** in accordance with its licence and the **Code**.

**Distribution connected** means connected to the **Distribution system**.

**Distribution losses charge** means the production-based (energy) incentive to generators. The losses charge is based on the approved loss factors, the load factor, the amount of energy produced seasonally and TOU and the WEPS energy rate (excluding losses).

**Distribution network capacity charge** (previously known as the **Distribution network access charge**) means the R/kVA or R/POD fixed network charge raised to recover **Distribution** network costs and depending on the tariff is charged on the **annual utilised capacity** or **maximum export capacity** where **maximum demand** is measured or the **NMD** where **maximum demand** is not measured.

**Distribution network demand charge** means the R/kVA or c/kWh variable network charge raised to recover Distribution network costs and depending on the tariff may be charged on the **chargeable demand** or the active energy.

**Distribution System** means Eskom's network infrastructure consisting of assets operated at a nominal voltage of 132 kV or less, not classified as transmission transformation equipment.

**Distribution use-of-system (DUoS) charges** means the network tariffs charged for making capacity available, connecting to and for the use of the **Distribution System**. The **DUoS** charges are the source of the **Distribution** network charge components in the retail tariff structures.

**DUoS charge (generators)** means the **DUoS** charges payable by generators. These **DUoS** charges for generators comprise the **network capacity charge** based on **maximum export capacity**, the **losses charge**, the **ancillary service charge**, the **service charge** and the **administration charge**.

**DUoS charge (loads)** means the **DUoS** charges payable by loads. These **DUoS** charges comprise the **network capacity charge**, the **network demand charge**, the **urban low voltage subsidy charge**, the **ancillary service charge**, the **service charge**, the **administration charge** and the **electrification and rural network subsidy charge**.

**Electrification and rural network subsidy charge** means the **DUoS charge** transparently indicating the contribution towards socio-economic network-related subsidies for Residential and **Rural<sub>p</sub>** tariffs and is payable by loads that use the **Distribution or Transmission System** for the delivery of energy.

**Energy demand charge** means the seasonally differentiated charge per **POD** that recovers peak energy costs, and based on the **chargeable demand**.

**Embedded Transmission use-of-system (ETUoS) charge** means the TUoS charges payable by customers connected to the **Distribution** network.

**Excess network capacity charge** (previously known as the **excess network access charge**) means the charge payable with reference to the **NMD rules** and is based on the maximum demand exceeding the NMD multiplied by the **event number** (recorded every time the NMD is exceeded) multiplied by the applicable **network capacity charges** for the tariff (refer further to paragraph 4.1).

**High-demand season** means the **TOU** Period from 1 June to 31 August of each year.

**High voltage (HV)** networks usually consist of equipment supplied at a voltage greater than 22 kV and consist of the distribution substations and networks. A substation is considered an **HV** substation when the primary side of the substation is supplied at a voltage > 22 kV.

**Key customer** means a customer that consumes more than 100 GWh per annum on a contiguous site under a single management structure, or is prepared to pay to be a Key Customer.

**Local authority tariffs** means tariffs applicable to municipal bulk points of supply.

**Loss factors** mean the factor indicating the cost or benefit of technical energy losses on the **Transmission** and the **Distribution System**. The **Distribution loss factors** differ per voltage category and per **Rural<sub>p</sub>** and **Urban<sub>p</sub>** categories. The **Transmission loss factors** differ for generators and loads and are based on the **Transmission zones**.

**Losses charge** means the charge payable based on the applicable **loss factors** and the WEPS rate excluding losses.

**Low-demand season** means the **TOU** Period from 1 September to 31 May of each year.

**Maximum demand/exported capacity** means the highest average demand measured in kVA or kW at the **POD/point of supply** during a 30 minute integrating period in a billing month.

**Maximum export capacity (MEC)** means the maximum capacity at the **point(s) of supply** notified by the customer and accepted by Eskom for the transmission of electrical energy between a generator and the **Transmission or Distribution System**.  
*Note: The notification of the maximum export capacity shall be governed by the **NMD and MEC rules**.*

**Medium voltage (MV)** networks consist of the networks above 1 kV up to 22 kV. Eskom has specifically designated some rural networks with a voltage of 33 kV as rural reticulation networks. A substation is considered a MV substation when the primary side of the substation is supplied at a voltage ≤ 22 kV.

**Monthly maximum exported capacity** means the higher of the notified **maximum export capacity (MEC)** or the actual **maximum exported capacity**, measured in kW registered during the billing month.

**Monthly utilised capacity** means the higher of the **notified maximum demand (NMD)** or the **maximum demand**, measured in kVA or kW registered during the billing month.

**Network capacity charge** (previously known as the **network access charge**) means the R/kVA or R/POD fixed network charge raised to recover network costs and depending on the tariff is charged on the **annual utilised capacity** or **maximum export capacity** where **maximum demand** is measured or the **NMD** where **maximum demand** is not measured.

**Network demand charge** means the R/kVA or c/kWh variable network charge raised to recover network costs and depending on the tariff may be charged on the **chargeable demand** or the active energy.

**Non-local authority tariffs** means the tariffs applicable to Eskom's direct customers (i.e. customers within Eskom's licensed area of supply) and exclude the **non-local authority tariffs**.

**Notified maximum demand (NMD)** means the contracted **maximum demand**, notified in writing by the customer and accepted by Eskom per **POD/point of supply**. *Note: The notification of demand shall be governed by the **NMD and MEC rules**.*

**NMD and MEC rules** means the rules approved by NERSA and as amended from time to time for the notification of demand or maximum export capacity or changes to or exceedances of the **NMD or MEC** (refer further to paragraph 4.1).

**Off-peak period** means the **TOU periods** of relatively low **system** demand (refer further to paragraph 3).

**Peak period** means the **TOU periods** of relatively high system demand (refer further to paragraph 3).

**Point of delivery (POD)/point of supply**, means either a single point of supply, or a specific group of points of supply on Eskom's **System**, from where electricity is supplied to the customer by Eskom, or from where the customer supplies electricity to Eskom's **System** located within a single substation, at which electricity is supplied/delivered to the customer at the same declared voltage and tariff. Note: This can be a metering or summation point.

**Public holidays** means the treatment of charges on **public holidays** as specified by Eskom and as set out in paragraph 10.

**Reactive energy charge** means a c/kVArh charge based on the power factor and tariff of the **POD**.

**Residential tariffs** means the Homelight and Homepower suite of tariffs.

**Rural<sub>p</sub>** means areas classified as rural by Eskom for the purposes of tariff design and classification.

**Service agreement** means each tariff /transaction/contract linked to an account.

**Service and administration charge** means the monthly charge payable per **account/service agreement** for service and administration related costs. (Also see **service charge** and **administration charge**).

**Service charge** means the daily fixed charge payable per **account** to recover service-related costs and is based on the sum of the **monthly utilised capacity(s)** or **maximum export capacity(s)** of all **PODs** linked to an **account**.

**Standard period** means the **TOU periods** of relatively mid system demand (refer further to paragraph 3).

**Standard charge/fee** means the fees/charges described in paragraph 7.

**System** means the **Transmission** and **Distribution** network infrastructure consisting of all lines and substation equipment.

**Time-of-use (TOU) tariff** means a tariff with energy charges that change during different **TOU periods** and seasons.

**TOU periods** means time blocks based on the volume of electricity demand during high, mid and low demand periods and may differ per tariff. The **TOU periods** typically are **peak, standard** and **off-peak** periods and differ during in **high** and **low demand** seasons and are further described in paragraph 3.

**Transmission** means the regulated business unit through which Eskom constructs, owns, operates and maintains the **Transmission System** in accordance with its licence and the **Code**.

**Transmission connected** means connected to the **Transmission system**.

**Transmission system** means Eskom's electricity **system** consisting of all lines and substation equipment where the nominal voltage is above 132 kV or where the nominal voltage is lower than or equal to 132 kV and there are no **Distribution System** assets.

**Transmission use-of-system (TUoS) charges** means the network tariffs charged for making capacity available, connecting to and for the use of the **Transmission System**. The **TUoS** charges are the source of the **ETUoS** and the **Transmission network charge** components in the retail tariff structures.

**Transmission network access charge** means the same as **Transmission network charge**.

**Transmission network charge** means the network related **TUoS** charge.

**Transmission zone(s)** means the geographic differentiation applicable to **Transmission** network charges and **loss factors** as indicated in paragraph 4, to indicate the costs associated with the delivery and transmission of energy.

**Urban<sub>p</sub> areas** means areas classified by Eskom as urban for the purposes of tariff design and classification.

**Urban low voltage subsidy charge** means the charge transparently indicating the network-related cross subsidy payable by ≥ 66 kV **Urban<sub>p</sub>** connected supplies for the benefit of < 66 kV connected **Urban<sub>p</sub>** supplies.

**Utilised capacity** means the same as **annual utilised capacity**.

## 2.2. Abbreviations

c/kWh	cents per kilowatt-hour
DUoS	Distribution use-of-system
ETUoS	Embedded Transmission use-of-system charges
kV	Kilovolt
kVA	Kilovolt-ampere
kWh	Kilowatt-hour
Gen	Generator
HV	High voltage
IPP	Independent Power Producer
MEC	Maximum export capacity
MV	Medium voltage
Nersa	National Energy Regulator of South Africa
NMD	Notified maximum demand
POD	Point of delivery
TOU	Time-of-use
TUoS	Transmission use-of-system
UoS	Use-of-system

**TABLE OF CONTENTS**

**PAGE NO**

1.	Standard prices.....	1
2.	Definitions and abbreviations.....	1
2.1.	Definitions.....	1
2.2.	Abbreviations.....	3
3.	Time-of-use periods.....	7
3.1.	Nightsave Urban Large, Nightsave Urban Small and Nightsave Rural TOU periods.....	7
3.2.	WEPS, Megaflex, Megaflex Gen, Miniflex, Ruraflex and Ruraflex Gen: low and high demand seasons TOU periods...	7
4.	Transmission zones.....	8
4.1.	Transmission zones for loads.....	8
4.2.	Transmission zones for generators.....	8
5.	NMD and MEC rules and charges payable in the event of an NMD exceedance.....	9
5.1.	Charges applicable for exceedance of the NMD.....	9
5.2.	Charges applicable for exceedance of the MEC rules*.....	9
6.	Charges payable monthly.....	9
7.	Standard fees/charges for services rendered.....	9
8.	Variation of standard prices.....	9
9.	Value-added tax.....	9
10.	Public holidays.....	10
<b>URBAN TARIFFS.....</b>		<b>11</b>
11.	WEPS.....	11
12.	Nightsave Urban (Large) tariff.....	14
13.	Nightsave Urban (Small) tariff.....	17
14.	Megaflex tariff.....	20
15.	Megaflex Gen tariff.....	23
16.	Miniflex tariff.....	25
17.	Businessrate tariff.....	28
18.	Public Lighting.....	29
<b>RESIDENTIAL TARIFFS.....</b>		<b>30</b>
19.	Homepower tariffs.....	30
19.1.	Homepower Standard tariff.....	30
19.2.	Homepower Bulk tariff.....	30
20.	Homelight non-local authority tariff.....	31
<b>RURAL TARIFFS.....</b>		<b>32</b>
21.	Nightsave Rural tariff.....	32
22.	Ruraflex tariff.....	34
23.	Ruraflex Gen tariff.....	36
24.	Landrate, Landrate Dx and Landlight tariffs.....	37
24.1.	Landrate 1, 2, 3 and 4.....	37
24.2.	Landrate Dx.....	37
24.3.	Landlight.....	37
<b>USE-OF-SYSTEM CHARGES.....</b>		<b>39</b>
25.	Loss factors.....	39
25.1.	Loss factors (Distribution – loads and generators).....	39
25.2.	Loss factors (Transmission – loads).....	39
25.3.	Transmission loss factors for Transmission connected generators.....	39
25.4.	TUoS (> 132 KV or direct Transmission connected) losses charge for generators.....	40
26.	TUoS (> 132 KV or direct Transmission connected) network charge for loads.....	40
27.	TUoS network charge for generators.....	40
28.	Ancillary service charge for Transmission connected generators and loads.....	40
29.	Ancillary service charge for Distribution connection generators and loads.....	41
30.	Urban <sub>p</sub> ETUoS network charge for loads.....	41
31.	Rural <sub>p</sub> ETUoS network charge for loads.....	41
32.	Urban <sub>p</sub> DUoS network charge and Urban <sub>p</sub> low voltage subsidy charge for loads.....	42
33.	Rural <sub>p</sub> DUoS network charge for loads.....	42
34.	DUoS network charge for generators.....	42
35.	DUoS distribution losses charge for generators.....	43

36.	DUoS service and administration charges.....	43
36.1.	DUoS urban <sub>p</sub> service and administration charges .....	43
36.2.	DUoS rural service and administration charges.....	43
36.3.	DUoS electrification and rural subsidy charge .....	44
37.	Excess network capacity charges in the event of an NMD exceedance .....	45

**TARIFFS APPLICABLE FOR GENERATOR USE-OF-SYSTEM CHARGES ..... 47**

38.	Gen-DUoS urban.....	47
39.	Gen-DUoS rural.....	47
40.	Gen-TUoS.....	48

**TARIFFS APPLICABLE FOR THE RECONCILIATION OF ACCOUNTS FOR ESKOM CUSTOMERS RECEIVING ENERGY FROM NON-ESKOM GENERATORS..... 49**

41.	Gen-wheeling tariff.....	49
42.	Gen-offset tariff.....	49
43.	Gen-purchase tariff .....	50

**TABLES**

**PAGE NO**

Table 1: WEPS non-local authority tariff .....	12
Table 2: WEPS local authority tariff .....	13
Table 3: Nightsave Urban (Large) non-local authority tariff.....	15
Table 4: Nightsave Urban (Large) local authority tariff.....	16
Table 5: Nightsave Urban (Small) non-local authority tariff.....	18
Table 6: Nightsave Urban (Small) local authority tariff .....	19
Table 7: Megaflex non-local authority tariff .....	21
Table 8: Megaflex local authority tariff .....	22
Table 9: Megaflex Gen tariff.....	24
Table 10: Miniflex non-local authority tariff.....	26
Table 11: Miniflex local authority tariff.....	27
Table 12: Businessrate non-local authority tariff .....	28
Table 13: Businessrate local authority tariff .....	28
Table 14: Public Lighting non-local authority tariff .....	29
Table 15: Public Lighting local authority tariff.....	29
Table 16: Homepower Standard and Homepower Bulk non-local authority tariff.....	30
Table 17: Homepower Standard local authority tariff .....	31
Table 18: Homelight non-local authority tariff.....	31
Table 19: Nightsave Rural non-local authority tariff .....	33
Table 20: Nightsave Rural local authority tariff .....	33
Table 21: Ruraflex non-local authority tariff .....	35
Table 22: Ruraflex local authority tariff.....	35
Table 23: Ruraflex Gen tariff.....	36
Table 24: Landrate, Landrate Dx and Landlight non-local authority tariff.....	37
Table 25: Landrate and Landrate Dx local authority tariff .....	38
Table 26: Loss factors (Distribution – loads and generators).....	39
Table 27: Loss factors (Transmission – loads) .....	39
Table 28: Loss factors for Transmission connected generators.....	39
Table 29: TUoS network charge for direct Transmission connected loads .....	40
Table 30: TUoS network charge for Transmission connected generators .....	40
Table 31: Ancillary service charge for Transmission connected generators and loads.....	40
Table 32: Ancillary service charge for Distribution connected generators and loads .....	41
Table 33: ETUoS network charge for Distribution connected Urban <sub>p</sub> loads.....	41
Table 34: ETUoS network charge for Distribution connected Rural <sub>p</sub> loads.....	41
Table 35: Urban <sub>p</sub> DUoS network charge and urban low voltage subsidy charge for Distribution connected loads.....	42
Table 36: Rural <sub>p</sub> DUoS network charge for Distribution connected loads .....	42
Table 37: DUoS network charge for Distribution connected generators .....	42
Table 38: Urban <sub>p</sub> Service and administration charges .....	43
Table 39: Rural <sub>p</sub> service and administration charges.....	43
Table 40: DUoS electrification and rural subsidy charge .....	44
Table 41: Excess network capacity charges – non local authorities .....	45
Table 42: Excess network capacity charges – Local authorities .....	46
Table 43: Gen DUoS Urban structure.....	47
Table 44: Gen DUoS rural structure .....	47
Table 45: Gen TUoS structure .....	48
Table 46: Gen-wheeling tariff structure .....	49
Table 47: Gen-offset tariff structure .....	50
Table 48: Gen-purchase tariff structure .....	50

**FIGURES**

**PAGE NO**

Figure 1: Nightsave TOU periods ..... 7

Figure 2: WEPS, Megaflex, Megaflex Gen, Miniflex, Ruraflex and Ruraflex Gen: low and high demand seasons TOU periods ..... 7

Figure 3: Transmission zones for loads ..... 8

Figure 4: Transmission zones for generators..... 8

### 3. Time-of-use periods

#### 3.1. Nightsave Urban Large, Nightsave Urban Small and Nightsave Rural TOU periods

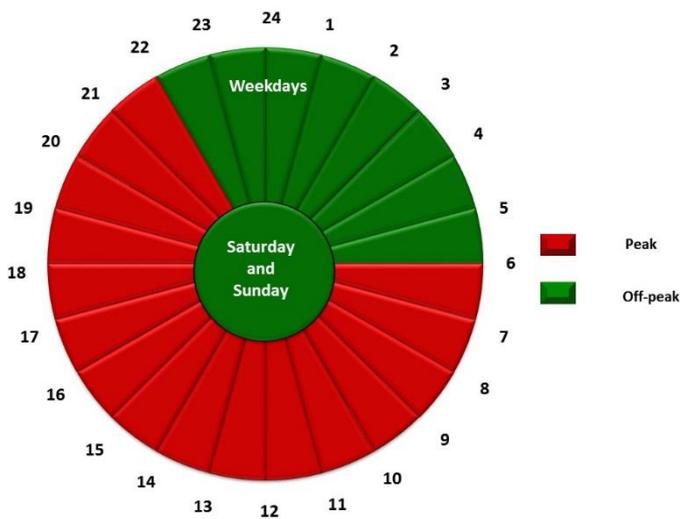


Figure 1: Nightsave TOU periods

#### 3.2. WEPS, Megaflex, Megaflex Gen, Miniflex, Ruraflex and Ruraflex Gen: low and high demand seasons TOU periods

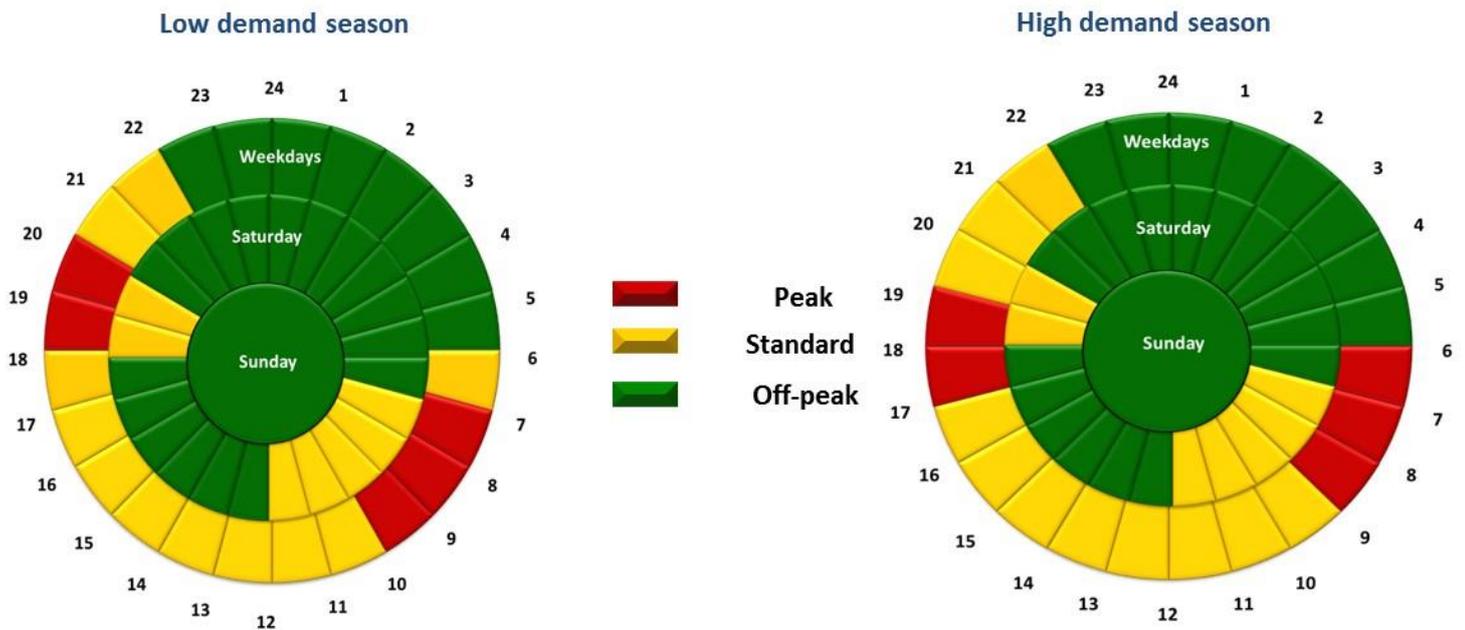


Figure 2: WEPS, Megaflex, Megaflex Gen, Miniflex, Ruraflex and Ruraflex Gen: low and high demand seasons TOU periods

## 4. Transmission zones

### 4.1. Transmission zones for loads

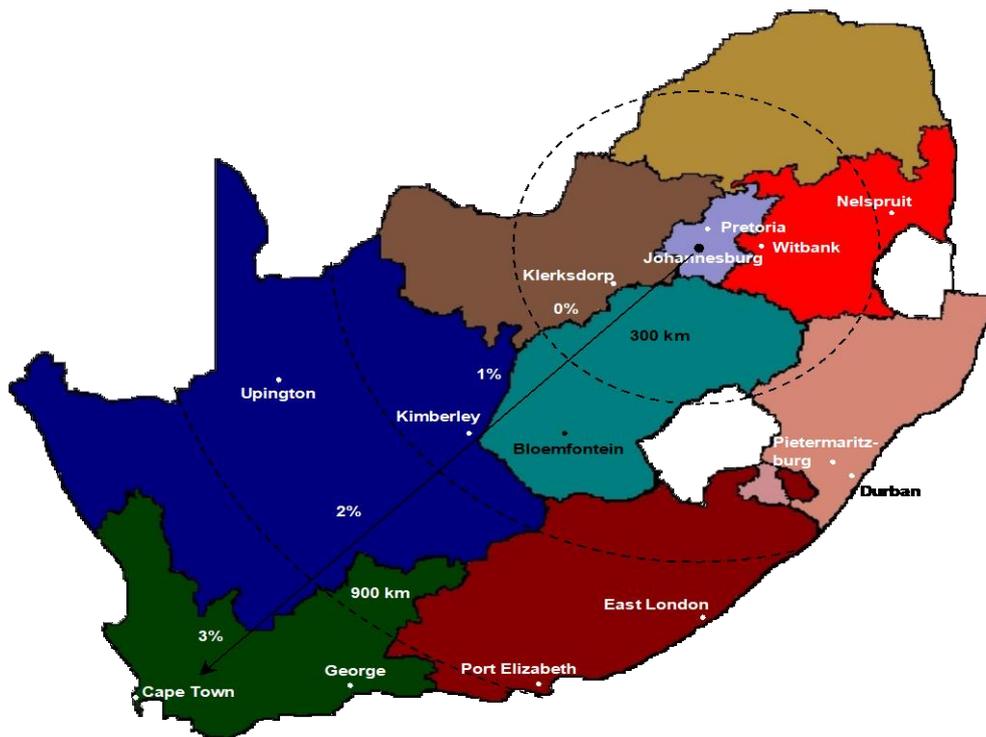


Figure 3: Transmission zones for loads

### 4.2. Transmission zones for generators

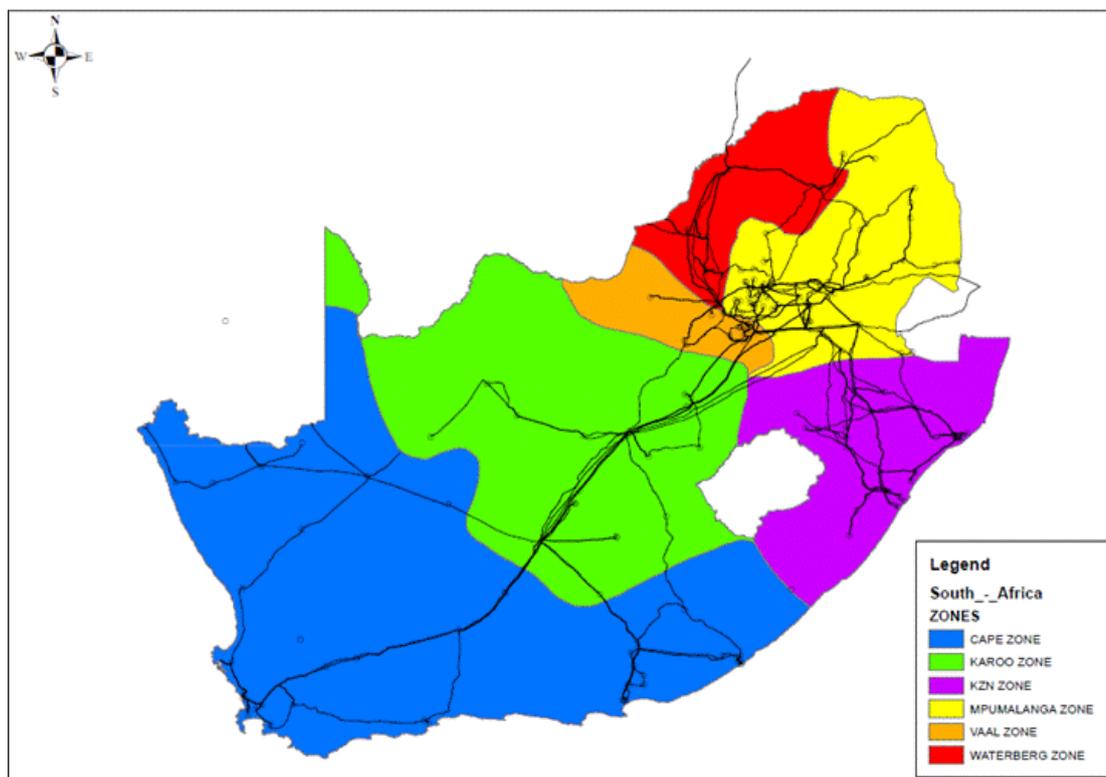


Figure 4: Transmission zones for generators

## 5. NMD and MEC rules and charges payable in the event of an NMD exceedance

The NMD (and MEC rules), as amended from time to time with the approval of NERSA, set out the rules relating to an notification, changes and exceedance of the **NMD and MEC**. For the rules please go to [www.eskom.co.za/tariffs](http://www.eskom.co.za/tariffs).

### 5.1. Charges applicable for exceedance of the NMD

An exceedance of the **NMD** based on the difference between the **maximum demand** and the NMD, will impact the following charges (as applicable); the **Distribution network capacity charge\***, the **network capacity charge\***, the **Transmission network charge** and the **urban low voltage subsidy charge** for as applicable, the DUoS charges, the TUoS charges and the Ruraflex, Ruraflex Gen, Nightsave Rural, Megaflex, Megaflex Gen, Miniflex, Nightsave Urban Small and Nightsave Urban Large tariffs.

The amount payable through the **excess network capacity charge** (refer to paragraph 37), in the event of an exceedance is calculated on the number of times the **NMD** is exceeded by the **maximum demand** multiplied by the portion of the maximum demand exceeding the **NMD** multiplied by the sum of the **Distribution network capacity charge\*** and the **Transmission network charge** (or for Miniflex and Ruraflex the **network capacity charge\***) and if applicable, the **urban low voltage subsidy charge** for the respective tariffs.

\*Note that any reference in the NMD rules to “the network access charge” must be replaced with “the network capacity charge” and to “the excess network access charge” must be replaced with “the excess network capacity charge”.

### 5.2. Charges applicable for exceedance of the MEC rules\*

These rules are in the process of being revised by Nersa. Please refer to the Eskom website ([www.eskom.co.za/tariffs](http://www.eskom.co.za/tariffs)) for the latest version of the rules.

## 6. Charges payable monthly

All electricity **accounts** payable by a customer in terms of this Schedule shall be rendered monthly by Eskom and shall be payable monthly in accordance with the provisions of the electricity supply agreement. If, in terms of the electricity supply agreement, meter readings are made at three-monthly intervals, Eskom shall render provisional **accounts** for the months in which no meter reading is made, based upon the monthly consumption in the previous three-monthly period or upon an estimated amount, and a final **account**, incorporating an adjustment of the provisional **accounts**, based upon the actual consumption for the period.

If the commencing date or the termination date of any supply is such that the supply was available for a portion of a month then the monthly charges payable in terms of this Schedule shall be calculated pro rata to the portion of a month of 30 (thirty) days during which the supply was available.

In addition to the charges payable in terms of this Schedule, a connection charge and/or standard charges/fees may be raised for costs not recovered through the tariff charges for the provision of new or additional capacity, or for additional services rendered to the customer.

## 7. Standard fees/charges for services rendered

In addition to the standard tariff charges set out in this schedule, Eskom may raise additional standard fees/charges for direct services rendered to a customer s e.g. the provision of service mains, the installation of equipment in the customer's substation, for the taking of any special meter readings, for reconnection of the supply after disconnection (i) either at the request of the customer or (ii) caused by the customer in failure to carry out its obligations, and for special/additional work done for the customer by Eskom. Refer to [www.eskom.co.za/tariffs](http://www.eskom.co.za/tariffs) for the list of standard/charges/fees applicable.

## 8. Variation of standard prices

In its charges to a particular customer, Eskom may vary the prices in this Schedule and/or impose additional charges, as regulated in terms of the Electricity Regulation Act (Act No 4 of 2006).

## 9. Value-added tax

The standard prices as specified in this Schedule include value-added tax (VAT) at the current prescribed tax rate of 15%. In cases of electricity supplies where the said tax is not applicable or partly or wholly exempt, the customer concerned will be informed in writing of the effective prices payable.

The charges and rates excluding VAT are also shown as these are used in the monthly electricity account to calculate the individual tariff charges before VAT is added on. This is done for the convenience of the customer so as to facilitate the claiming of input tax where applicable and to allow for part exemptions and zero rating.

## 10. Public holidays

The table below indicates the treatment of public holidays for the Nightsave (Urban Large & Small), WEPS, Megaflex, Megaflex Gen and Miniflex tariffs for the period 1 April 2021 to until 30 June 2022. The relevant seasonally differentiated energy charges, energy demand charges and network demand charges will be applicable on these days. Any unexpectedly announced public holiday not listed below will be treated as the day of the week on which it falls.

- The following public holidays will always be treated as a Sunday for Miniflex, Megaflex, Megaflex Gen and WEPS tariffs; New Year's Day, Good Friday, Family Day, Christmas Day and Day of Goodwill. All other days will be treated as a Saturday unless it falls on a Sunday in which case it will be treated as a Sunday.
- For Nightsave Urban Large and Small, all public holidays will be treated as a Sunday.
- All public holidays for the Nightsave Rural, Ruraflex and Ruraflex Gen tariffs will be treated as the day of the week on which it falls.

• Date	Day	Actual day of the week	TOU day treated as	
			Nightsave Urban Large Nightsave Urban Small	Megaflex, Miniflex, WEPS, Megaflex Gen
02 April 2021	Good Friday	Friday	Sunday	Sunday
05 April 2021	Family Day	Monday	Sunday	Sunday
27 April 2021	Freedom Day	Tuesday	Sunday	Saturday
1 May 2021	Workers Day	Saturday	Sunday	Saturday
16 June 2021	Youth Day	Wednesday	Sunday	Saturday
9 August 2021	National Women's Day	Monday	Sunday	Saturday
24 September 2021	Heritage Day	Friday	Sunday	Saturday
16 December 2021	Day of Reconciliation	Thursday	Sunday	Saturday
25 December 2021	Christmas Day	Saturday	Sunday	Sunday
26 December 2021	Day of Goodwill	Sunday	Sunday	Sunday
27 December 2021	Public Holiday	Monday	Sunday	Saturday
1 January 2022	New Year's Day	Saturday	Sunday	Sunday
21 March 2022	Human Rights Day	Monday	Sunday	Saturday
15 April 2022	Good Friday	Friday	Sunday	Sunday
18 April 2022	Family Day	Monday	Sunday	Sunday
27 April 2022	Freedom Day	Wednesday	Sunday	Saturday
1 May 2022	Worker's Day	Sunday	Sunday	Sunday
2 May 2022	Public Holiday	Monday	Sunday	Saturday
16 June 2022	Youth Day	Thursday	Sunday	Saturday

## URBAN TARIFFS

### 11. WEPS

**WEPS has the same rates and structure as Megaflex and represents the wholesale costs in the most unbundled format. The following charges apply:**

1. seasonally and time-of-use differentiated c/kWh **active energy charges** including losses, based on the voltage of supply and the **transmission zone**;
2. seasonally and time-of-use differentiated c/kWh **active energy charges** excluding losses
3. three time-of-use periods namely **peak, standard and off-peak**, as specified in paragraph 3.2;
4. the treatment of **public holidays** for the raising of the **active energy charge** and the **network demand charge** shall be as specified in paragraph 10;
5. a R/kVA/month **Transmission network charge** based on the voltage of the supply, the **transmission zone** and the **annual utilised capacity** measured at the **POD** applicable during all time periods;
6. a R/kVA/month **Distribution network capacity charge** based on the voltage of the supply and the **annual utilised capacity** measured at the **POD** applicable during all time periods;
7. a R/kVA/month **Distribution network demand charge** based on the voltage of the supply and the **chargeable demand** measured at the **POD** applicable during peak and standard periods;
8. a R/kVA **urban low voltage subsidy charge** based on the voltage of the supply and charged on the **annual utilised capacity** measured at the **POD** applicable during all time periods;
9. a c/kWh **ancillary service charge** based on the voltage of the supply applicable during all time periods;
10. a R/Account/day **service charge** based on the sum of the **monthly utilised capacity(s) of each POD linked to an account**;
11. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each **POD** linked to an **account**;
12. a c/kVAh **reactive energy charge** supplied in excess of 30% (0,96 power factor or less) of the kWh recorded during the peak and standard periods. The excess reactive energy is determined per 30-minute integrating period and accumulated for the month and will only be applicable during the **high-demand season**;
13. a c/kWh **electrification and rural network subsidy charge**, applied to the total active energy measured at the **POD** in the month;
14. a c/kWh **affordability subsidy charge** applied to the total active energy purchased from Eskom at the **POD** in the month – applicable to **non-local authority** tariffs only; and
15. an **excess network capacity charge** shall be payable in the event of an **NMD** exceedance as specified in paragraph 4.1 in accordance with the **NMD rules** and as set out in Table 41 and Table 42 for the relevant tariff.

**Note:**

**The WEPS rate excluding losses is used for the reconciliation of accounts for 1) wheeling of energy and 2) where Eskom purchases energy from an IPP but the energy is supplied directly to a customer. Refer to page 49 for more details**

**Table 1: WEPS non-local authority tariff**

**WEPS – Non-local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]										Transmission network charges [R/kVA/m]			
		High demand season [Jun - Aug]					Low demand season [Sep - May]					Peak	Standard	Off Peak	
		Peak	Standard	Off Peak	Peak	Standard	Off Peak	Peak	Standard	Off Peak					
			VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl							
≤ 300km	< 500V	417.36	479.96	126.98	146.03	69.34	79.74	136.67	157.17	94.30	108.45	60.12	69.14	R 11.94	R 13.73
	≥ 500V & < 66kV	410.81	472.43	124.45	143.12	67.59	77.73	133.99	154.09	92.24	106.08	58.52	67.30	R 10.91	R 12.55
	≥ 66kV & ≤ 132kV	397.80	457.47	120.50	138.58	65.45	75.27	129.78	149.25	89.30	102.70	56.68	65.18	R 10.62	R 12.21
	> 132kV*	374.91	431.15	113.56	130.59	61.68	70.93	122.33	140.68	84.17	96.80	53.41	61.42	R 13.43	R 15.44
> 300km and ≤ 600km	< 500V	420.76	483.87	127.49	146.61	69.22	79.60	137.27	157.86	94.51	108.69	59.96	68.95	R 12.02	R 13.82
	≥ 500V & < 66kV	414.91	477.15	125.68	144.53	68.25	78.49	135.37	155.68	93.15	107.12	59.09	67.95	R 11.01	R 12.66
	≥ 66kV & ≤ 132kV	401.71	461.97	121.68	139.93	66.06	75.97	131.03	150.68	90.18	103.71	57.22	65.80	R 10.70	R 12.31
	> 132kV*	378.67	435.47	114.73	131.94	62.26	71.60	123.51	142.04	84.99	97.74	53.91	62.00	R 13.55	R 15.58
> 600km and ≤ 900km	< 500V	424.95	488.69	128.73	148.04	69.88	80.36	138.62	159.41	95.42	109.73	60.51	69.59	R 12.16	R 13.98
	≥ 500V & < 66kV	419.08	481.94	126.97	146.02	68.94	79.28	136.70	157.21	94.10	108.22	59.69	68.64	R 11.11	R 12.78
	≥ 66kV & ≤ 132kV	405.81	466.68	122.94	141.38	66.75	76.76	132.37	152.23	91.12	104.79	57.81	66.48	R 10.77	R 12.39
	> 132kV*	382.48	439.85	115.85	133.23	62.95	72.39	124.76	143.47	85.86	98.74	54.48	62.65	R 13.75	R 15.81
> 900km	< 500V	429.23	493.61	130.08	149.59	70.60	81.19	140.03	161.03	96.36	110.81	61.15	70.32	R 12.24	R 14.08
	≥ 500V & < 66kV	423.25	486.74	128.20	147.43	69.59	80.03	138.04	158.75	94.99	109.24	60.28	69.32	R 11.24	R 12.93
	≥ 66kV & ≤ 132kV	409.88	471.36	124.15	142.77	67.41	77.52	133.69	153.74	92.02	105.82	58.38	67.14	R 10.87	R 12.50
	> 132kV*	386.21	444.14	117.04	134.60	63.59	73.13	126.06	144.97	86.80	99.82	55.09	63.35	R 13.85	R 15.93

\* 132 kV or Transmission connected

Voltage	Distribution network charges					
	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge [R/kVA/m]	
	VAT incl		VAT incl		VAT incl	
< 500V	R 23.73	R 27.29	R 44.99	R 51.74	R 0.00	R 0.00
≥ 500V & < 66kV	R 21.76	R 25.02	R 41.27	R 47.46	R 0.00	R 0.00
≥ 66kV & ≤ 132kV	R 7.77	R 8.94	R 14.39	R 16.55	R 19.17	R 22.05
> 132kV*	R 0.00	R 0.00	R 0.00	R 0.00	R 19.17	R 22.05

\* 132 kV or Transmission connected

Voltage	Ancillary service charge [c/kWh]	
	VAT incl	
< 500V	0.55	0.63
≥ 500V & < 66kV	0.54	0.62
≥ 66kV & ≤ 132kV	0.52	0.60
> 132kV*	0.48	0.55

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge	
	VAT incl		VAT incl	
≤ 100 kVA	R 19.39	R 22.30	R 4.26	R 4.90
> 100 kVA & ≤ 500 kVA	R 88.53	R 101.81	R 24.83	R 28.55
> 500 kVA & ≤ 1 MVA	R 272.39	R 313.25	R 49.30	R 56.70
> 1 MVA	R 272.39	R 313.25	R 122.76	R 141.17
Key customers	R 5 337.86	R 6 138.54	R 170.47	R 196.04

Reactive energy charge [c/kVAh]			
High season	VAT incl	Low season	
		VAT incl	
19.19	22.07	0.00	0.00

Electrification and rural network subsidy charge [c/kWh]	Affordability subsidy charge [c/kWh]		
	Only payable by non-local authority tariffs		
	VAT incl	VAT incl	
10.61	12.20	4.98	5.73

Active energy charge excluding losses [c/kWh]											
Peak	High demand season [Jun - Aug]					Low demand season [Sep - May]					
	Standard		Off Peak		Peak	Standard		Off Peak			
	VAT incl		VAT incl		VAT incl	VAT incl	VAT incl	VAT incl	VAT incl		
370.94	426.58	112.36	129.21	61.03	70.18	121.03	139.18	83.28	95.77	52.84	60.77

Active energy charge excluding losses and environmental levy [c/kWh]											
Peak	High demand season [Jun - Aug]					Low demand season [Sep - May]					
	Standard		Off Peak		Peak	Standard		Off Peak			
	VAT incl		VAT incl		VAT incl	VAT incl	VAT incl	VAT incl	VAT incl		
367.45	422.57	108.87	125.20	57.54	66.17	117.54	135.17	79.79	91.76	49.35	56.75

**Table 2: WEPS local authority tariff**

**WEPS – Local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]												Transmission network charges [R/kVA/m]	
		High demand season [Jun - Aug]						Low demand season [Sep - May]						VAT incl	
		Peak	Standard		Off Peak		Peak	Standard		Off Peak					
VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl				
≤ 300km	< 500V	437.10	502.67	133.01	152.96	72.58	83.47	143.10	164.57	98.76	113.57	62.95	72.39	R 12.18	R 14.01
	≥ 500V & < 66kV	430.21	494.74	130.35	149.90	70.79	81.41	140.34	161.39	96.58	111.07	61.29	70.48	R 11.11	R 12.78
	≥ 66kV & ≤ 132kV	416.64	479.14	126.21	145.14	68.55	78.83	135.92	156.31	93.56	107.59	59.34	68.24	R 10.81	R 12.43
> 300km and ≤ 600km	> 132kV*	392.65	451.55	118.95	136.79	64.59	74.28	128.08	147.29	88.15	101.37	55.92	64.31	R 13.69	R 15.74
	< 500V	440.67	506.77	133.49	153.51	72.48	83.35	143.75	165.31	98.96	113.80	62.78	72.20	R 12.23	R 14.06
	≥ 500V & < 66kV	434.51	499.69	131.63	151.37	71.48	82.20	141.76	163.02	97.56	112.19	61.88	71.16	R 11.24	R 12.93
> 600km and ≤ 900km	≥ 66kV & ≤ 132kV	420.71	483.82	127.44	146.56	69.20	79.58	137.24	157.83	94.45	108.62	59.90	68.89	R 10.90	R 12.54
	> 132kV*	396.57	456.06	120.16	138.18	65.23	75.01	129.34	148.74	89.05	102.41	56.47	64.94	R 13.82	R 15.89
	< 500V	445.06	511.82	134.83	155.05	73.20	84.18	145.16	166.93	99.94	114.93	63.40	72.91	R 12.39	R 14.25
> 900km	≥ 500V & < 66kV	438.89	504.72	132.94	152.88	72.20	83.03	143.20	164.68	98.49	113.26	62.52	71.90	R 11.31	R 13.01
	≥ 66kV & ≤ 132kV	425.00	488.75	128.72	148.03	69.89	80.37	138.59	159.38	95.39	109.70	60.49	69.56	R 10.98	R 12.63
	> 132kV*	400.54	460.62	121.36	139.56	65.89	75.77	130.68	150.28	89.93	103.42	57.05	65.61	R 14.01	R 16.11
> 900km	< 500V	449.52	516.95	136.19	156.62	73.95	85.04	146.65	168.65	100.92	116.06	64.04	73.65	R 12.45	R 14.32
	≥ 500V & < 66kV	443.27	509.76	134.27	154.41	72.93	83.87	144.58	166.27	99.51	114.44	63.11	72.58	R 11.44	R 13.16
	≥ 66kV & ≤ 132kV	429.27	493.66	130.05	149.56	70.62	81.21	140.02	161.02	96.35	110.80	61.13	70.30	R 11.07	R 12.73
> 900km	> 132kV*	404.49	465.16	122.59	140.98	66.62	76.61	132.01	151.81	90.87	104.50	57.67	66.32	R 14.10	R 16.22

\* 132 kV or Transmission connected

Distribution network charges						
Voltage	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge [R/kVA/m]	
	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl
< 500V	R 24.29	R 27.93	R 46.02	R 52.92	R 0.00	R 0.00
≥ 500V & < 66kV	R 22.26	R 25.60	R 42.21	R 48.54	R 0.00	R 0.00
≥ 66kV & ≤ 132kV	R 7.96	R 9.15	R 14.73	R 16.94	R 19.50	R 22.43
> 132kV*	R 0.00	R 0.00	R 0.00	R 0.00	R 19.50	R 22.43

\* 132 kV or Transmission connected

Voltage	Ancillary service charge [c/kWh]	
	VAT incl	VAT incl
< 500V	0.57	0.66
≥ 500V & < 66kV	0.55	0.63
≥ 66kV & ≤ 132kV	0.51	0.59
> 132kV*	0.48	0.55

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl	VAT incl	VAT incl	VAT incl
≤ 100 kVA	R 19.72	R 22.68	R 4.32	R 4.97
> 100 kVA & ≤ 500 kVA	R 90.12	R 103.64	R 25.24	R 29.03
> 500 kVA & ≤ 1 MVA	R 277.35	R 318.95	R 50.21	R 57.74
> 1 MVA	R 277.35	R 318.95	R 125.02	R 143.77
Key customers	R 5 434.93	R 6 250.17	R 173.57	R 199.61

Reactive energy charge [c/kVAh]			
High season	Low season		
	VAT incl	VAT incl	
19.51	22.44	0.00	0.00

Electrification and rural network subsidy charge [c/kWh]	
VAT incl	
10.80	12.42

Active energy charge excluding losses [c/kWh]											
Peak	High demand season [Jun - Aug]				Low demand season [Sep - May]						
	VAT incl	Standard	Off Peak	Off Peak	Peak	Standard	Off Peak	Standard	Off Peak		
VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl		
388.49	446.76	117.69	135.34	63.91	73.50	126.72	145.73	87.22	100.30	55.33	63.63

Active energy charge excluding losses and environmental levy [c/kWh]											
Peak	High demand season [Jun - Aug]				Low demand season [Sep - May]						
	VAT incl	Standard	Off Peak	Off Peak	Peak	Standard	Off Peak	Standard	Off Peak		
VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl		
385.00	442.75	114.20	131.33	60.42	69.48	123.23	141.71	83.73	96.29	51.84	59.62

## 12. Nightsave Urban (Large) tariff

Electricity tariff suitable for high load factor Urban<sub>p</sub> customers with an NMD greater than 1 MVA with the following charges:

1. seasonally differentiated c/kWh **active energy charges** including losses based on the voltage of the supply and the **Transmission zone**;
2. seasonally differentiated R/kVA **energy demand charges** based on the voltage of the supply, the **Transmission zone** and charged on the **chargeable demand** in **peak** periods as specified in paragraph 3.1;
3. the treatment of **public holidays** for the raising of the **energy demand charge** and the **network demand charge** shall be as specified in paragraph 10;
4. a R/kVA **transmission network charge** based on the voltage of the supply, the **Transmission zone** and charged on the **annual utilised capacity** measured at the **POD** applicable during all time periods;
5. a R/kVA **Distribution network capacity charge** based on the voltage of the supply and the **annual utilised capacity** measured at the **POD** applicable during all time periods;
6. a R/kVA **Distribution network demand charge** based on the voltage of the supply and the **chargeable demand** measured at the **POD** applicable during **peak** periods only;
7. a R/kVA **urban low voltage subsidy charge** applicable to  $\geq 66$  kV supplies based on the voltage of the supply and charged on the **annual utilised capacity** measured at the **POD** applicable during all time periods.
8. a c/kWh **ancillary service charge** based on the voltage of the supply applicable during all time periods;
9. a R/Account/day **service charge** based on the sum of the **monthly utilised capacity(s) of each POD linked to an account**;
10. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each **POD** linked to an **account**;
11. a c/kWh **electrification and rural network subsidy charge** applied to the total active energy measured at the **POD** in the month;
12. a c/kWh **affordability subsidy charge** applied to the total active energy purchased from Eskom at the **POD** in the month – applicable to **non-local authority** tariffs only; and
13. an **excess network capacity charge** shall be payable in the event of an NMD exceedance as specified in paragraph 4.1 in accordance with the **NMD rules** and as set out in Table 41 and Table 42 for the relevant tariff.

**Table 3: Nightsave Urban (Large) non-local authority tariff**

**Nightsave Urban Large – Non-local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]				Energy demand charge [R/kVA/m]				Transmission network charges [R/kVA/m]	
		High demand season [Jun - Aug]		Low demand season [Sep - May]		High demand season [Jun - Aug]		Low demand season [Sep - May]		VAT incl	
		VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl
≤ 300km	< 500V	<b>103.08</b>	<i>118.54</i>	<b>80.13</b>	<i>92.15</i>	<b>R 313.65</b>	<i>R 360.70</i>	<b>R 43.84</b>	<i>R 50.42</i>	<b>R 11.94</b>	<i>R 13.73</i>
	≥ 500V & < 66kV	<b>97.61</b>	<i>112.25</i>	<b>76.19</b>	<i>87.62</i>	<b>R 303.57</b>	<i>R 349.11</i>	<b>R 42.43</b>	<i>R 48.79</i>	<b>R 10.91</b>	<i>R 12.55</i>
	≥ 66kV & ≤ 132kV	<b>96.89</b>	<i>111.42</i>	<b>75.28</b>	<i>86.57</i>	<b>R 292.52</b>	<i>R 336.40</i>	<b>R 40.89</b>	<i>R 47.02</i>	<b>R 10.62</b>	<i>R 12.21</i>
	> 132kV*	<b>90.63</b>	<i>104.22</i>	<b>70.47</b>	<i>81.04</i>	<b>R 282.17</b>	<i>R 324.50</i>	<b>R 39.44</b>	<i>R 45.36</i>	<b>R 13.43</b>	<i>R 15.44</i>
> 300km and ≤ 600km	< 500V	<b>104.46</b>	<i>120.13</i>	<b>81.01</b>	<i>93.16</i>	<b>R 316.88</b>	<i>R 364.41</i>	<b>R 44.26</b>	<i>R 50.90</i>	<b>R 12.02</b>	<i>R 13.82</i>
	≥ 500V & < 66kV	<b>99.66</b>	<i>114.61</i>	<b>77.75</b>	<i>89.41</i>	<b>R 306.66</b>	<i>R 352.66</i>	<b>R 42.81</b>	<i>R 49.23</i>	<b>R 11.01</b>	<i>R 12.66</i>
	≥ 66kV & ≤ 132kV	<b>98.92</b>	<i>113.76</i>	<b>76.81</b>	<i>88.33</i>	<b>R 295.41</b>	<i>R 339.72</i>	<b>R 41.27</b>	<i>R 47.46</i>	<b>R 10.70</b>	<i>R 12.31</i>
	> 132kV*	<b>92.55</b>	<i>106.43</i>	<b>71.91</b>	<i>82.70</i>	<b>R 285.05</b>	<i>R 327.81</i>	<b>R 39.80</b>	<i>R 45.77</i>	<b>R 13.55</b>	<i>R 15.58</i>
> 600km and ≤ 900km	< 500V	<b>105.43</b>	<i>121.24</i>	<b>81.80</b>	<i>94.07</i>	<b>R 320.13</b>	<i>R 368.15</i>	<b>R 44.71</b>	<i>R 51.42</i>	<b>R 12.16</b>	<i>R 13.98</i>
	≥ 500V & < 66kV	<b>100.65</b>	<i>115.75</i>	<b>78.55</b>	<i>90.33</i>	<b>R 309.73</b>	<i>R 356.19</i>	<b>R 43.29</b>	<i>R 49.78</i>	<b>R 11.11</b>	<i>R 12.78</i>
	≥ 66kV & ≤ 132kV	<b>99.88</b>	<i>114.86</i>	<b>77.57</b>	<i>89.21</i>	<b>R 298.39</b>	<i>R 343.15</i>	<b>R 41.69</b>	<i>R 47.94</i>	<b>R 10.77</b>	<i>R 12.39</i>
	> 132kV*	<b>93.45</b>	<i>107.47</i>	<b>72.65</b>	<i>83.55</i>	<b>R 287.89</b>	<i>R 331.07</i>	<b>R 40.19</b>	<i>R 46.22</i>	<b>R 13.75</b>	<i>R 15.81</i>
> 900km	< 500V	<b>106.56</b>	<i>122.54</i>	<b>82.62</b>	<i>95.01</i>	<b>R 323.23</b>	<i>R 371.71</i>	<b>R 45.14</b>	<i>R 51.91</i>	<b>R 12.24</b>	<i>R 14.08</i>
	≥ 500V & < 66kV	<b>101.62</b>	<i>116.86</i>	<b>79.31</b>	<i>91.21</i>	<b>R 312.84</b>	<i>R 359.77</i>	<b>R 43.67</b>	<i>R 50.22</i>	<b>R 11.24</b>	<i>R 12.93</i>
	≥ 66kV & ≤ 132kV	<b>100.92</b>	<i>116.06</i>	<b>78.32</b>	<i>90.07</i>	<b>R 301.43</b>	<i>R 346.64</i>	<b>R 42.11</b>	<i>R 48.43</i>	<b>R 10.87</b>	<i>R 12.50</i>
	> 132kV*	<b>94.44</b>	<i>108.61</i>	<b>73.44</b>	<i>84.46</i>	<b>R 290.81</b>	<i>R 334.43</i>	<b>R 40.60</b>	<i>R 46.69</i>	<b>R 13.85</b>	<i>R 15.93</i>

\* 132 kV or Transmission connected

Distribution network charges						
Voltage	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge [R/kVA/m]	
	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl
< 500V	<b>R 23.73</b>	<i>R 27.29</i>	<b>R 44.99</b>	<i>R 51.74</i>	<b>R 0.00</b>	<i>R 0.00</i>
≥ 500V & < 66kV	<b>R 21.76</b>	<i>R 25.02</i>	<b>R 41.27</b>	<i>R 47.46</i>	<b>R 0.00</b>	<i>R 0.00</i>
≥ 66kV & ≤ 132kV	<b>R 7.77</b>	<i>R 8.94</i>	<b>R 14.39</b>	<i>R 16.55</i>	<b>R 19.17</b>	<i>R 22.05</i>
> 132kV / Transmission connected	<b>R 0.00</b>	<i>R 0.00</i>	<b>R 0.00</b>	<i>R 0.00</i>	<b>R 19.17</b>	<i>R 22.05</i>

Voltage	Ancillary service charge [c/kWh]	
	VAT incl	VAT incl
< 500V	<b>0.55</b>	<i>0.63</i>
≥ 500V & < 66kV	<b>0.54</b>	<i>0.62</i>
≥ 66kV & ≤ 132kV	<b>0.52</b>	<i>0.60</i>
> 132kV*	<b>0.48</b>	<i>0.55</i>

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl	VAT incl	VAT incl	VAT incl
>1 MVA	<b>R 272.39</b>	<i>R 313.25</i>	<b>R 122.76</b>	<i>R 141.17</i>
Key customers	<b>R 5 337.86</b>	<i>R 6 138.54</i>	<b>R 170.47</b>	<i>R 196.04</i>

Electrification and rural network subsidy charge [c/kWh]	Affordability subsidy charge [c/kWh]	
	VAT incl	VAT incl
	<b>10.61</b>	<i>12.20</i>
	<b>4.98</b>	<i>5.73</i>

**Table 4: Nightsave Urban (Large) local authority tariff**

**Nightsave Urban Large – Local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]				Energy demand charge [R/kVA/m]				Transmission network charges [R/kVA/m]	
		High demand season [Jun - Aug]		Low demand season [Sep - May]		High demand season [Jun - Aug]		Low demand season [Sep - May]			
			VAT incl		VAT incl		VAT incl		VAT incl		VAT incl
≤ 300km	< 500V	107.96	124.15	83.94	96.53	R 322.32	R 370.67	R 45.03	R 51.78	R 12.18	R 14.01
	≥ 500V & < 66kV	102.23	117.56	79.80	91.77	R 311.97	R 358.77	R 43.62	R 50.16	R 11.11	R 12.78
	≥ 66kV & ≤ 132kV	101.47	116.69	78.81	90.63	R 300.61	R 345.70	R 42.01	R 48.31	R 10.81	R 12.43
	> 132kV*	94.94	109.18	73.81	84.88	R 289.99	R 333.49	R 40.51	R 46.59	R 13.69	R 15.74
> 300km and ≤ 600km	< 500V	109.37	125.78	84.85	97.58	R 325.66	R 374.51	R 45.47	R 52.29	R 12.23	R 14.06
	≥ 500V & < 66kV	104.36	120.01	81.40	93.61	R 315.12	R 362.39	R 44.00	R 50.60	R 11.24	R 12.93
	≥ 66kV & ≤ 132kV	103.59	119.13	80.46	92.53	R 303.61	R 349.15	R 42.42	R 48.78	R 10.90	R 12.54
	> 132kV*	96.89	111.42	75.33	86.63	R 292.93	R 336.87	R 40.91	R 47.05	R 13.82	R 15.89
> 600km and ≤ 900km	< 500V	110.41	126.97	85.65	98.50	R 328.96	R 378.30	R 45.95	R 52.84	R 12.39	R 14.25
	≥ 500V & < 66kV	105.41	121.22	82.25	94.59	R 318.32	R 366.07	R 44.48	R 51.15	R 11.31	R 13.01
	≥ 66kV & ≤ 132kV	104.62	120.31	81.26	93.45	R 306.66	R 352.66	R 42.83	R 49.25	R 10.98	R 12.63
	> 132kV*	97.86	112.54	76.09	87.50	R 295.89	R 340.27	R 41.35	R 47.55	R 14.01	R 16.11
> 900km	< 500V	111.59	128.33	86.52	99.50	R 332.20	R 382.03	R 46.40	R 53.36	R 12.45	R 14.32
	≥ 500V & < 66kV	106.46	122.43	83.04	95.50	R 321.50	R 369.73	R 44.88	R 51.61	R 11.44	R 13.16
	≥ 66kV & ≤ 132kV	105.67	121.52	82.05	94.36	R 309.76	R 356.22	R 43.29	R 49.78	R 11.07	R 12.73
	> 132kV*	98.93	113.77	76.94	88.48	R 298.87	R 343.70	R 41.72	R 47.98	R 14.10	R 16.22

\* 132 kV or Transmission connected

Distribution network charges						
Voltage	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge [R/kVA/m]	
		VAT incl		VAT incl		VAT incl
< 500V	R 24.29	R 27.93	R 46.02	R 52.92	R 0.00	R 0.00
≥ 500V & < 66kV	R 22.26	R 25.60	R 42.21	R 48.54	R 0.00	R 0.00
≥ 66kV & ≤ 132kV	R 7.96	R 9.15	R 14.73	R 16.94	R 19.50	R 22.43
> 132kV / Transmission connected	R 0.00	R 0.00	R 0.00	R 0.00	R 19.50	R 22.43

Voltage	Ancillary service charge [c/kWh]	
		VAT incl
< 500V	0.57	0.66
≥ 500V & < 66kV	0.55	0.63
≥ 66kV & ≤ 132kV	0.51	0.59
> 132kV*	0.48	0.55

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
		VAT incl		VAT incl
>1 MVA	R 277.35	R 318.95	R 125.02	R 143.77
Key customers	R 5 434.93	R 6 250.17	R 173.57	R 199.61

Electrification and rural network subsidy charge [c/kWh]	
	VAT incl
10.80	12.42

### 13. Nightsave Urban (Small) tariff

Electricity tariff for high load factor Urban<sub>p</sub> customers with an NMD from 25 kVA to 1 MVA with the following charges:

1. seasonally differentiated c/kWh **active energy charges** including losses based on the voltage of the supply and the **Transmission zone**;
2. seasonally differentiated R/kVA **energy demand charges** based on the voltage of the supply, the **transmission zone** and charged on the **chargeable demand** in **peak** periods as specified in paragraph 3.1;
3. the treatment of **public holidays** for the raising of the **energy demand charge** and the **network demand charge** shall be as specified in paragraph 10;
4. a R/kVA **Transmission network charge** based on the voltage of the supply, the **Transmission zone** and charged on the **annual utilised capacity** measured at the **POD** applicable during all time periods;
5. a R/kVA **Distribution network capacity charge** based on the voltage of the supply and the **annual utilised capacity** measured at the **POD** applicable during all time periods;
6. a R/kVA **Distribution network demand charge** based on the voltage of the supply and the **chargeable demand** measured at the **POD** applicable during **peak** periods only;
7. a R/kVA **urban low voltage subsidy charge** applicable to  $\geq 66$  kV supplies based on the voltage of the supply and charged on the **annual utilised capacity** measured at the **POD** applicable during all time periods;
8. a c/kWh **ancillary service charge** based on the voltage of the supply applicable during all time periods;
9. a R/Account/day **service charge** based on the sum of the **monthly utilised capacity(s) of each POD linked to an account**;
10. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each **POD** linked to an **account**;
11. a c/kWh **electrification and rural network subsidy charge** applied to the total active energy measured at the **POD** in the month;
12. a c/kWh **affordability subsidy charge** applied to the total active energy purchased from Eskom at the **POD** in the month – applicable to **non-local authority** tariffs only; and
13. an **excess network capacity charge** shall be payable in the event of an **NMD** exceedance as specified in paragraph 4.1 a in accordance with the **NMD rules** and as set out in Table 41 and Table 42 for the relevant tariff..

**Table 5: Nightsave Urban (Small) non-local authority tariff**

**Nightsave Urban *Small* – Non-local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]				Energy demand charge [R/kVA/m]				Transmission network charges [R/kVA/m]	
		High demand season [Jun - Aug]		Low demand season [Sep - May]		High demand season [Jun - Aug]		Low demand season [Sep - May]		VAT incl	
		VAT incl		VAT incl		VAT incl		VAT incl			
≤ 300km	< 500V	<b>103.08</b>	118.54	<b>80.13</b>	92.15	<b>R 220.27</b>	R 253.31	<b>R 28.39</b>	R 32.65	<b>R 11.94</b>	R 13.73
	≥ 500V & < 66kV	<b>97.61</b>	112.25	<b>76.19</b>	87.62	<b>R 213.18</b>	R 245.16	<b>R 27.43</b>	R 31.54	<b>R 10.91</b>	R 12.55
	≥ 66kV & ≤ 132kV	<b>96.89</b>	111.42	<b>75.28</b>	86.57	<b>R 205.34</b>	R 236.14	<b>R 26.41</b>	R 30.37	<b>R 10.62</b>	R 12.21
	> 132kV*	<b>90.63</b>	104.22	<b>70.47</b>	81.04	<b>R 198.16</b>	R 227.88	<b>R 25.49</b>	R 29.31	<b>R 13.43</b>	R 15.44
> 300km and ≤ 600km	< 500V	<b>104.46</b>	120.13	<b>81.01</b>	93.16	<b>R 222.53</b>	R 255.91	<b>R 28.62</b>	R 32.91	<b>R 12.02</b>	R 13.82
	≥ 500V & < 66kV	<b>99.66</b>	114.61	<b>77.75</b>	89.41	<b>R 215.32</b>	R 247.62	<b>R 27.71</b>	R 31.87	<b>R 11.01</b>	R 12.66
	≥ 66kV & ≤ 132kV	<b>98.92</b>	113.76	<b>76.81</b>	88.33	<b>R 207.45</b>	R 238.57	<b>R 26.69</b>	R 30.69	<b>R 10.70</b>	R 12.31
	> 132kV*	<b>92.55</b>	106.43	<b>71.91</b>	82.70	<b>R 200.14</b>	R 230.16	<b>R 25.75</b>	R 29.61	<b>R 13.55</b>	R 15.58
> 600km and ≤ 900km	< 500V	<b>105.43</b>	121.24	<b>81.80</b>	94.07	<b>R 224.71</b>	R 258.42	<b>R 28.88</b>	R 33.21	<b>R 12.16</b>	R 13.98
	≥ 500V & < 66kV	<b>100.65</b>	115.75	<b>78.55</b>	90.33	<b>R 217.53</b>	R 250.16	<b>R 27.98</b>	R 32.18	<b>R 11.11</b>	R 12.78
	≥ 66kV & ≤ 132kV	<b>99.88</b>	114.86	<b>77.57</b>	89.21	<b>R 209.55</b>	R 240.98	<b>R 26.96</b>	R 31.00	<b>R 10.77</b>	R 12.39
	> 132kV*	<b>93.45</b>	107.47	<b>72.65</b>	83.55	<b>R 202.11</b>	R 232.43	<b>R 26.00</b>	R 29.90	<b>R 13.75</b>	R 15.81
> 900km	< 500V	<b>106.56</b>	122.54	<b>82.62</b>	95.01	<b>R 227.01</b>	R 261.06	<b>R 29.19</b>	R 33.57	<b>R 12.24</b>	R 14.08
	≥ 500V & < 66kV	<b>101.62</b>	116.86	<b>79.31</b>	91.21	<b>R 219.66</b>	R 252.61	<b>R 28.27</b>	R 32.51	<b>R 11.24</b>	R 12.93
	≥ 66kV & ≤ 132kV	<b>100.92</b>	116.06	<b>78.32</b>	90.07	<b>R 211.68</b>	R 243.43	<b>R 27.25</b>	R 31.34	<b>R 10.87</b>	R 12.50
	> 132kV*	<b>94.44</b>	108.61	<b>73.44</b>	84.46	<b>R 204.23</b>	R 234.86	<b>R 26.30</b>	R 30.25	<b>R 13.85</b>	R 15.93

\* 132 kV or Transmission connected

Voltage	Distribution network charges					
	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge [R/kVA/m]	
	VAT incl		VAT incl		VAT incl	
< 500V	<b>R 23.73</b>	R 27.29	<b>R 44.99</b>	R 51.74	<b>R 0.00</b>	R 0.00
≥ 500V & < 66kV	<b>R 21.76</b>	R 25.02	<b>R 41.27</b>	R 47.46	<b>R 0.00</b>	R 0.00
≥ 66kV & ≤ 132kV	<b>R 7.77</b>	R 8.94	<b>R 14.39</b>	R 16.55	<b>R 19.17</b>	R 22.05
> 132kV / Transmission connected	<b>R 0.00</b>	R 0.00	<b>R 0.00</b>	R 0.00	<b>R 19.17</b>	R 22.05

Voltage	Ancillary service charge [c/kWh]	
	VAT incl	
< 500V	<b>0.55</b>	0.63
≥ 500V & < 66kV	<b>0.54</b>	0.62
≥ 66kV & ≤ 132kV	<b>0.52</b>	0.60
> 132kV*	<b>0.48</b>	0.55

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl		VAT incl	
	≤ 100 kVA	<b>R 19.39</b>	R 22.30	<b>R 4.26</b>
> 100 kVA & ≤ 500 kVA	<b>R 88.53</b>	R 101.81	<b>R 24.83</b>	R 28.55
> 500 kVA & ≤ 1 MVA	<b>R 272.39</b>	R 313.25	<b>R 49.30</b>	R 56.70
Key customers	<b>R 5 337.86</b>	R 6 138.54	<b>R 170.47</b>	R 196.04

Electrification and rural network subsidy charge [c/kWh]	Affordability subsidy charge [c/kWh]		
	Only payable by non-local authority tariffs		
	VAT incl		
<b>10.61</b>	12.20	<b>4.98</b>	5.73

**Table 6: Nightsave Urban (Small) local authority tariff**

**Nightsave Urban Small – Local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]				Energy demand charge [R/kVA/m]				Transmission network charges [R/kVA/m]	
		High demand season [Jun - Aug]		Low demand season [Sep - May]		High demand season [Jun - Aug]		Low demand season [Sep - May]			
		VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl
≤ 300km	< 500V	107.96	124.15	83.94	96.53	R 226.35	R 260.30	R 29.19	R 33.57	R 12.18	R 14.01
	≥ 500V & < 66kV	102.23	117.56	79.80	91.77	R 219.06	R 251.92	R 28.19	R 32.42	R 11.11	R 12.78
	≥ 66kV & ≤ 132kV	101.47	116.69	78.81	90.63	R 211.04	R 242.70	R 27.13	R 31.20	R 10.81	R 12.43
	> 132kV*	94.94	109.18	73.81	84.88	R 203.64	R 234.19	R 26.20	R 30.13	R 13.69	R 15.74
> 300km and ≤ 600km	< 500V	109.37	125.78	84.85	97.58	R 228.69	R 262.99	R 29.43	R 33.84	R 12.23	R 14.06
	≥ 500V & < 66kV	104.36	120.01	81.40	93.61	R 221.33	R 254.53	R 28.45	R 32.72	R 11.24	R 12.93
	≥ 66kV & ≤ 132kV	103.59	119.13	80.46	92.53	R 213.22	R 245.20	R 27.40	R 31.51	R 10.90	R 12.54
	> 132kV*	96.89	111.42	75.33	86.63	R 205.68	R 236.53	R 26.46	R 30.43	R 13.82	R 15.89
> 600km and ≤ 900km	< 500V	110.41	126.97	85.65	98.50	R 230.97	R 265.62	R 29.70	R 34.16	R 12.39	R 14.25
	≥ 500V & < 66kV	105.41	121.22	82.25	94.59	R 223.53	R 257.06	R 28.77	R 33.09	R 11.31	R 13.01
	≥ 66kV & ≤ 132kV	104.62	120.31	81.26	93.45	R 215.36	R 247.66	R 27.69	R 31.84	R 10.98	R 12.63
	> 132kV*	97.86	112.54	76.09	87.50	R 207.72	R 238.88	R 26.71	R 30.72	R 14.01	R 16.11
> 900km	< 500V	111.59	128.33	86.52	99.50	R 233.29	R 268.28	R 29.98	R 34.48	R 12.45	R 14.32
	≥ 500V & < 66kV	106.46	122.43	83.04	95.50	R 225.74	R 259.60	R 29.04	R 33.40	R 11.44	R 13.16
	≥ 66kV & ≤ 132kV	105.67	121.52	82.05	94.36	R 217.53	R 250.16	R 27.98	R 32.18	R 11.07	R 12.73
	> 132kV*	98.93	113.77	76.94	88.48	R 209.90	R 241.39	R 27.02	R 31.07	R 14.10	R 16.22

\* 132 kV or Transmission connected

Voltage	Distribution network charges					
	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge [R/kVA/m]	
	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl
< 500V	R 24.29	R 27.93	R 46.02	R 52.92	R 0.00	R 0.00
≥ 500V & < 66kV	R 22.26	R 25.60	R 42.21	R 48.54	R 0.00	R 0.00
≥ 66kV & ≤ 132kV	R 7.96	R 9.15	R 14.73	R 16.94	R 19.50	R 22.43
> 132kV / Transmission connected	R 0.00	R 0.00	R 0.00	R 0.00	R 19.50	R 22.43

Voltage	Ancillary service charge [c/kWh]	
	VAT incl	VAT incl
< 500V	0.57	0.66
≥ 500V & < 66kV	0.55	0.63
≥ 66kV & ≤ 132kV	0.51	0.59
> 132kV*	0.48	0.55

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl	VAT incl	VAT incl	VAT incl
≤ 100 kVA	R 19.72	R 22.68	R 4.32	R 4.97
> 100 kVA & ≤ 500 kVA	R 90.12	R 103.64	R 25.24	R 29.03
> 500 kVA & ≤ 1 MVA	R 277.35	R 318.95	R 50.21	R 57.74
Key customers	R 5 434.93	R 6 250.17	R 173.57	R 199.61

Electrification and rural network subsidy charge [c/kWh]	
VAT incl	VAT incl
10.80	12.42

## 14. Megaflex tariff

TOU electricity tariff for Urban<sub>p</sub> customers with an NMD greater than 1 MVA that are able to shift load, with the following charges:

1. seasonally and **time-of-use** differentiated c/kWh **active energy charges** including losses, based on the voltage of supply and the **Transmission zone**;
2. three **time-of-use** periods namely **peak**, **standard** and **off-peak**, as specified in paragraph 3.2;
3. the treatment of **public holidays** for the raising of the **active energy charge** and the **network demand charge** shall be as specified in paragraph 10;
4. a R/kVA/month **Transmission network charge** based on the voltage of the supply, the **Transmission zone** and the **annual utilised capacity** measured at the **POD** applicable during all time periods;
5. a R/kVA/month **Distribution network capacity charge** based on the voltage of the supply and the **annual utilised capacity** measured at the **POD** applicable during all time periods;
6. a R/kVA/month **Distribution network demand charge** based on the voltage of the supply and the **chargeable demand** measured at the **POD** applicable during **peak** and **standard** periods;
7. a R/kVA **urban low voltage subsidy charge** based on the voltage of the supply and charged on the **annual utilised capacity** measured at the **POD** applicable during all time periods
8. a c/kWh **ancillary service charge** based on the voltage of the supply applicable during all time periods;
9. a R/Account/day **service charge** based on the sum of the **monthly utilised capacity(s) of each POD linked to an account**;
10. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each **POD** linked to an **account**;
11. a c/kVAh **reactive energy charge** supplied in excess of 30% (0,96 power factor or less) of the kWh recorded during the **peak** and **standard** periods. The excess reactive energy is determined per 30-minute integrating period and accumulated for the month and will only be applicable during the **high-demand season**;
12. a c/kWh **electrification and rural network subsidy charge**, applied to the total active energy measured at the **POD** in the month;
13. a c/kWh **affordability subsidy charge** applied to the total active energy purchased from Eskom at the **POD** in the month – applicable to **non-local authority** tariffs only; and
14. an **excess network capacity charge** shall be payable in the event of an **NMD** exceedance as specified in paragraph 4.1 in accordance with the **NMD rules** and as set out in Table 41 and Table 42 for the relevant tariff..

**Table 7: Megaflex non-local authority tariff**

**Megaflex – Non-local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]									Transmission network charges [R/kVA/m]				
		High demand season [Jun - Aug]			Low demand season [Sep - May]										
		Peak	Standard	Off Peak	Peak	Standard	Off Peak	Peak	Standard	Off Peak	VAT incl				
≤ 300km	< 500V	417.36	479.96	126.98	146.03	69.34	79.74	136.67	157.17	94.30	108.45	60.12	69.14	R 11.94	R 13.73
	≥ 500V & < 66kV	410.81	472.43	124.45	143.12	67.59	77.73	133.99	154.09	92.24	106.08	58.52	67.30	R 10.91	R 12.55
	≥ 66kV & ≤ 132kV	397.80	457.47	120.50	138.58	65.45	75.27	129.78	149.25	89.30	102.70	56.68	65.18	R 10.62	R 12.21
	> 132kV*	374.91	431.15	113.56	130.59	61.68	70.93	122.33	140.68	84.17	96.80	53.41	61.42	R 13.43	R 15.44
> 300km and ≤ 600km	< 500V	420.76	483.87	127.49	146.61	69.22	79.60	137.27	157.86	94.51	108.69	59.96	68.95	R 12.02	R 13.82
	≥ 500V & < 66kV	414.91	477.15	125.68	144.53	68.25	78.49	135.37	155.68	93.15	107.12	59.09	67.95	R 11.01	R 12.66
	≥ 66kV & ≤ 132kV	401.71	461.97	121.68	139.93	66.06	75.97	131.03	150.68	90.18	103.71	57.22	65.80	R 10.70	R 12.31
	> 132kV*	378.67	435.47	114.73	131.94	62.26	71.60	123.51	142.04	84.99	97.74	53.91	62.00	R 13.55	R 15.58
> 600km and ≤ 900km	< 500V	424.95	488.69	128.73	148.04	69.88	80.36	138.62	159.41	95.42	109.73	60.51	69.59	R 12.16	R 13.98
	≥ 500V & < 66kV	419.08	481.94	126.97	146.02	68.94	79.28	136.70	157.21	94.10	108.22	59.69	68.64	R 11.11	R 12.78
	≥ 66kV & ≤ 132kV	405.81	466.68	122.94	141.38	66.75	76.76	132.37	152.23	91.12	104.79	57.81	66.48	R 10.77	R 12.39
	> 132kV*	382.48	439.85	115.85	133.23	62.95	72.39	124.76	143.47	85.86	98.74	54.48	62.65	R 13.75	R 15.81
> 900km	< 500V	429.23	493.61	130.08	149.59	70.60	81.19	140.03	161.03	96.36	110.81	61.15	70.32	R 12.24	R 14.08
	≥ 500V & < 66kV	423.25	486.74	128.20	147.43	69.59	80.03	138.04	158.75	94.99	109.24	60.28	69.32	R 11.24	R 12.93
	≥ 66kV & ≤ 132kV	409.88	471.36	124.15	142.77	67.41	77.52	133.69	153.74	92.02	105.82	58.38	67.14	R 10.87	R 12.50
	> 132kV*	386.21	444.14	117.04	134.60	63.59	73.13	126.06	144.97	86.80	99.82	55.09	63.35	R 13.85	R 15.93

\* 132 kV or Transmission connected

Distribution network charges						
Voltage	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge [R/kVA/m]	
	VAT incl		VAT incl		VAT incl	
< 500V	R 23.73	R 27.29	R 44.99	R 51.74	R 0.00	R 0.00
≥ 500V & < 66kV	R 21.76	R 25.02	R 41.27	R 47.46	R 0.00	R 0.00
≥ 66kV & ≤ 132kV	R 7.77	R 8.94	R 14.39	R 16.55	R 19.17	R 22.05
> 132kV*	R 0.00	R 0.00	R 0.00	R 0.00	R 19.17	R 22.05

\* 132 kV or Transmission connected

Voltage	Ancillary service charge [c/kWh]	
	VAT incl	
< 500V	0.55	0.63
≥ 500V & < 66kV	0.54	0.62
≥ 66kV & ≤ 132kV	0.52	0.60
> 132kV*	0.48	0.55

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge	
	VAT incl		VAT incl	
> 1 MVA	R 272.39	R 313.25	R 122.76	R 141.17
Key customers	R 5 337.86	R 6 138.54	R 170.47	R 196.04

Reactive energy charge [c/kVArh]			
High season	Low season		
	VAT incl	VAT incl	
19.19	22.07	0.00	0.00

Electrification and rural network subsidy charge [c/kWh]	Affordability subsidy charge [c/kWh]	
	VAT incl	VAT incl
10.61	12.20	4.98
		5.73

Only payable by non-local authority tariffs

**Table 8: Megaflex local authority tariff**

**Megaflex – Local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]												Transmission network charges	
		High demand season [Jun - Aug]						Low demand season [Sep - May]							
		Peak	Standard		Off Peak		Peak	Standard		Off Peak		VAT incl			
≤ 300km	< 500V	437.10	502.67	133.01	152.96	72.58	83.47	143.10	164.57	98.76	113.57	62.95	72.39	R 12.18	R 14.01
	≥ 500V & < 66kV	430.21	494.74	130.35	149.90	70.79	81.41	140.34	161.39	96.58	111.07	61.29	70.48	R 11.11	R 12.78
	≥ 66kV & ≤ 132kV	416.64	479.14	126.21	145.14	68.55	78.83	135.92	156.31	93.56	107.59	59.34	68.24	R 10.81	R 12.43
	> 132kV*	392.65	451.55	118.95	136.79	64.59	74.28	128.08	147.29	88.15	101.37	55.92	64.31	R 13.69	R 15.74
> 300km and ≤ 600km	< 500V	440.67	506.77	133.49	153.51	72.48	83.35	143.75	165.31	98.96	113.80	62.78	72.20	R 12.23	R 14.06
	≥ 500V & < 66kV	434.51	499.69	131.63	151.37	71.48	82.20	141.76	163.02	97.56	112.19	61.88	71.16	R 11.24	R 12.93
	≥ 66kV & ≤ 132kV	420.71	483.82	127.44	146.56	69.20	79.58	137.24	157.83	94.45	108.62	59.90	68.89	R 10.90	R 12.54
> 600km and ≤ 900km	> 132kV*	396.57	456.06	120.16	138.18	65.23	75.01	129.34	148.74	89.05	102.41	56.47	64.94	R 13.82	R 15.89
	< 500V	445.06	511.82	134.83	155.05	73.20	84.18	145.16	166.93	99.94	114.93	63.40	72.91	R 12.39	R 14.25
	≥ 500V & < 66kV	438.89	504.72	132.94	152.88	72.20	83.03	143.20	164.68	98.49	113.26	62.52	71.90	R 11.31	R 13.01
	≥ 66kV & ≤ 132kV	425.00	488.75	128.72	148.03	69.89	80.37	138.59	159.38	95.39	109.70	60.49	69.56	R 10.98	R 12.63
> 900km	> 132kV*	400.54	460.62	121.36	139.56	65.89	75.77	130.68	150.28	89.93	103.42	57.05	65.61	R 14.01	R 16.11
	< 500V	449.52	516.95	136.19	156.62	73.95	85.04	146.65	168.65	100.92	116.06	64.04	73.65	R 12.45	R 14.32
	≥ 500V & < 66kV	443.27	509.76	134.27	154.41	72.93	83.87	144.58	166.27	99.51	114.44	63.11	72.58	R 11.44	R 13.16
	≥ 66kV & ≤ 132kV	429.27	493.66	130.05	149.56	70.62	81.21	140.02	161.02	96.35	110.80	61.13	70.30	R 11.07	R 12.73
	> 132kV*	404.49	465.16	122.59	140.98	66.62	76.61	132.01	151.81	90.87	104.50	57.67	66.32	R 14.10	R 16.22

\* 132 kV or Transmission connected

Voltage	Distribution network charges					
	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge	
< 500V	R 24.29	R 27.93	R 46.02	R 52.92	R 0.00	R 0.00
≥ 500V & < 66kV	R 22.26	R 25.60	R 42.21	R 48.54	R 0.00	R 0.00
≥ 66kV & ≤ 132kV	R 7.96	R 9.15	R 14.73	R 16.94	R 19.50	R 22.43
> 132kV*	R 0.00	R 0.00	R 0.00	R 0.00	R 19.50	R 22.43

\* 132 kV or Transmission connected

Voltage	Ancillary service charge [c/kWh]	
	VAT incl	
< 500V	0.57	0.66
≥ 500V & < 66kV	0.55	0.63
≥ 66kV & ≤ 132kV	0.51	0.59
> 132kV*	0.48	0.55

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl		VAT incl	
> 1 MVA	R 277.35	R 318.95	R 125.02	R 143.77
Key customers	R 5 434.93	R 6 250.17	R 173.57	R 199.61

Reactive energy charge [c/kVArh]			
High season	Low season		
	VAT incl		VAT incl
19.51	22.44	0.00	0.00

Electrification and rural network subsidy charge [c/kWh]	
VAT incl	
10.80	12.42

## 15. Megaflex Gen tariff

An electricity tariff for Urban<sub>p</sub> customers connected at medium voltage, high voltage and Transmission voltages that consume energy (importers of energy from the Transmission and Distribution System) and generate energy (exporters of energy to the Transmission and Distribution System) at the same point of supply (or metering point).

The following charges shall apply for the consumption and generation of energy:

1. seasonally and time-of-use differentiated c/kWh **active energy charges** including losses, based on the voltage of supply and the **Transmission zone** for energy supplied at the **POD**;
2. three time-of-use periods namely **peak, standard and off-peak**, as specified in paragraph 3.2;
3. the treatment of **public holidays** for the raising of the **active energy charge** and the **network demand charge** shall be as specified in paragraph 10;
4. a R/account per day **service charge** based on the higher of the sum of the **monthly utilised capacity** or the sum of the **monthly maximum exported capacity** of all points of supply/points of delivery linked to an account;
5. a R/per day **administration charge** based on **monthly utilised capacity** and **monthly maximum exported capacity** of each **POD/point of supply/service agreement/** linked to an account;
6. for **Transmission** connected supplies ,the higher of the value of :
  - a. the a R/kVA/month **Transmission network charge** (loads) payable each month based on the voltage of the supply, the **Transmission zone** and the **annual utilised capacity** measured at the **POD** applicable during all time periods; or
  - b. the R/kW/month **Transmission network charge** (generators) payable each month for transmission-connected generators based on the **Transmission zone** for generators and the **maximum export capacity** applicable during all time periods for each premise;
7. for **Distribution** supplies connected supplies ,the higher of the value of :
  - a. the R/kW/month **Distribution network capacity charge** for generators based on the voltage of the supply and the **maximum export capacity** measured at the **POD** applicable during all time periods; less
  - b. a **distribution losses charge** rebating the **network capacity charge**, based on **loss factors** specified in paragraphs 25.1 and 25.2, using the following formula:
  - c. energy produced in **each TOU period** x WEPS rates excluding losses in each **TOU period** x (**Distribution loss factor** x **Transmission loss factor** (for loads)-1) measured at each point of supply, but not beyond extinction);  
or the sum of
    - d. a R/kVA/month **Transmission network charge** (for loads) based on the voltage of the supply, the **Transmission zone** and the **annual utilised capacity** measured at the **POD** applicable during all time periods; and
    - e. the R/kVA/month **Distribution network capacity charge** for loads based on the voltage of the supply and **annual utilised capacity** measured at the **POD** applicable during all time periods; and
    - f. a R/kVA/month **Distribution network demand charge** based on the voltage of the supply and the chargeable demand at the **POD** measured during **peak** and **standard** periods;
8. for **Transmission** connected generators a losses charge based on **loss factors** specified in paragraph 25.3 at each point of supply is applied, using the following formula (refer to paragraph 25.4);
  - a. energy produced in each **TOU period** x WEPS rates excluding losses in each **TOU period** x (**Transmission loss factor** (for generators)-1/**Transmission loss factor** (for generators)).
9. a R/kVA **urban low voltage subsidy charge** based on the voltage of the supply and charged on the **annual utilised capacity** measured at the **POD** applicable during all time periods;
10. a c/kWh **ancillary service charge** applied on the total active energy supplied and produced in the month based on the voltage of the supply applicable during all time periods;
11. a c/kVAh **reactive energy charge** supplied in excess of 30% (0,96 power factor or less) of the kWh recorded during the **peak** and **standard** periods. The excess reactive energy is determined per 30-minute integrating period and accumulated for the month and will only be applicable during the **high-demand season**;
12. a c/kWh **electrification and rural subsidy** applied to the total active energy consumed in the month;
13. a c/kWh **affordability subsidy charge** applied to the total active energy consumed in the month; and
14. an **excess network capacity charge** shall be payable in the event of an **NMD or MEC** exceedance in accordance with the **NMD and MEC rules** and as set out for NMD exceedances in Table 41 and Table 42 for the relevant tariff.

### Notes:

- A comparison is made on a monthly basis to determine the higher (in rand value) of the **network charges** as a consumer and as a generator located at the same point of supply/ metering point and these rand values will be used for billing purposes.
- The **network charges, losses charges, ancillary service charges** as well as **administration charges** and **service charge** applicable for generators will depend on whether the generator is **Transmission connected** or **Distribution connected**.

**Table 9: Megaflex Gen tariff**

**Megaflex Gen - Non-local authority**

Transmission zone	Voltage	Active energy charge for loads [c/kWh]									Transmission network charges [R/kVA/m]				
		High demand season [Jun - Aug]			Low demand season [Sep - May]										
		Peak	Standard	Off Peak	Peak	Standard	Off Peak	VAT incl	VAT incl	VAT incl	VAT incl				
≤ 300km	< 500V	417.36	479.96	126.98	146.03	69.34	79.74	136.67	157.17	94.30	108.45	60.12	69.14	R 11.94	R 13.73
	≥ 500V & < 66kV	410.81	472.43	124.45	143.12	67.59	77.73	133.99	154.09	92.24	106.08	58.52	67.30	R 10.91	R 12.55
	≥ 66kV & ≤ 132kV	397.80	457.47	120.50	138.58	65.45	75.27	129.78	149.25	89.30	102.70	56.68	65.18	R 10.62	R 12.21
	> 132kV*	374.91	431.15	113.56	130.59	61.68	70.93	122.33	140.68	84.17	96.80	53.41	61.42	R 13.43	R 15.44
> 300km and ≤ 600km	< 500V	420.76	483.87	127.49	146.61	69.22	79.60	137.27	157.86	94.51	108.69	59.96	68.95	R 12.02	R 13.82
	≥ 500V & < 66kV	414.91	477.15	125.68	144.53	68.25	78.49	135.37	155.68	93.15	107.12	59.09	67.95	R 11.01	R 12.66
	≥ 66kV & ≤ 132kV	401.71	461.97	121.68	139.93	66.06	75.97	131.03	150.68	90.18	103.71	57.22	65.80	R 10.70	R 12.31
	> 132kV*	378.67	435.47	114.73	131.94	62.26	71.60	123.51	142.04	84.99	97.74	53.91	62.00	R 13.55	R 15.58
> 600km and ≤ 900km	< 500V	424.95	488.69	128.73	148.04	69.88	80.36	138.62	159.41	95.42	109.73	60.51	69.59	R 12.16	R 13.98
	≥ 500V & < 66kV	419.08	481.94	126.97	146.02	68.94	79.28	136.70	157.21	94.10	108.22	59.69	68.64	R 11.11	R 12.78
	≥ 66kV & ≤ 132kV	405.81	466.68	122.94	141.38	66.75	76.76	132.37	152.23	91.12	104.79	57.81	66.48	R 10.77	R 12.39
	> 132kV*	382.48	439.85	115.85	133.23	62.95	72.39	124.76	143.47	85.86	98.74	54.48	62.65	R 13.75	R 15.81
> 900km	< 500V	429.23	493.61	130.08	149.59	70.60	81.19	140.03	161.03	96.36	110.81	61.15	70.32	R 12.24	R 14.08
	≥ 500V & < 66kV	423.25	486.74	128.20	147.43	69.59	80.03	138.04	158.75	94.99	109.24	60.28	69.32	R 11.24	R 12.93
	≥ 66kV & ≤ 132kV	409.88	471.36	124.15	142.77	67.41	77.52	133.69	153.74	92.02	105.82	58.38	67.14	R 10.87	R 12.50
	> 132kV*	386.21	444.14	117.04	134.60	63.59	73.13	126.06	144.97	86.80	99.82	55.09	63.35	R 13.85	R 15.93
<b>WEPS energy rate excluding losses</b>		<b>370.94</b>	<b>426.58</b>	<b>112.36</b>	<b>129.21</b>	<b>61.03</b>	<b>70.18</b>	<b>121.03</b>	<b>139.19</b>	<b>83.28</b>	<b>95.77</b>	<b>52.84</b>	<b>60.77</b>		

\* 132 kV or Transmission connected

Voltage	Distribution network charges for loads					
	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge [R/kVA/m]	
	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl
< 500V	R 23.73	R 27.29	R 44.99	R 51.74	R 0.00	R 0.00
≥ 500V & < 66kV	R 21.76	R 25.02	R 41.27	R 47.46	R 0.00	R 0.00
≥ 66kV & ≤ 132kV	R 7.77	R 8.94	R 14.39	R 16.55	R 19.17	R 22.05
> 132kV / Transmission connected	R 0.00	R 0.00	R 0.00	R 0.00	R 19.17	R 22.05

Transmission network charges for generators		Distribution network charges for generators*	
TUoS [ > 132kV]	Network charge [R/kW]	Voltage	Network capacity charge [R/kW/m]
	VAT incl		
Cape	R 0.00	R 0.00	
Karoo	R 0.00	R 0.00	< 500V
Kwazulu-Natal	R 2.82	R 3.24	≥ 500V & < 66kV
Vaal	R 9.39	R 10.80	≥ 66kV & ≤ 132kV
Waterberg	R 12.02	R 13.82	
Mpumalanga	R 11.16	R 12.83	

\* The Distribution network charge will be rebated by the Losses charge, but not beyond extinction

Customer categories [kVA or MVA = loads] [kW or MW = generators]	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl	VAT incl	VAT incl	VAT incl
≤ 100 kVA/ kW	R 19.39	R 22.30	R 4.26	R 4.90
> 100 kVA/ kW & ≤ 500 kVA/ kW	R 88.53	R 101.81	R 24.83	R 28.55
> 500 kVA/ kW & ≤ 1 MVA/MW	R 272.39	R 313.25	R 49.30	R 56.70
> 1 MVA/MW	R 272.39	R 313.25	R 122.76	R 141.17
Key customers or Transmission connected generators	R 5 337.86	R 6 138.54	R 170.47	R 196.04

Ancillary service charge for loads and generators		
Voltage	Ancillary service charge [c/kWh]	
	VAT incl	VAT incl
< 500V	0.55	0.63
≥ 500V & < 66kV	0.54	0.62
≥ 66kV & ≤ 132kV	0.52	0.60
> 132kV	0.48	0.55

\* 132 kV or Transmission connected

Applicable to loads			
Electrification and rural network subsidy charge [c/kWh]	Affordability subsidy charge [c/kWh]		
	Only payable by non-local authority tariffs		
VAT incl	VAT incl	VAT incl	VAT incl
10.61	12.20	4.98	5.73

Reactive energy charge [c/kVArh] (loads)			
High season	VAT incl	Low season	VAT incl

Losses charge for generators				
Distribution connected generators			Transmission connected generators	
Formula			Formula	
Distribution = ((Energy produced x WEPS rate excluding losses) x (Distribution loss factor x Transmission loss factor-1)) in each TOU period			Transmission = (Energy produced x WEPS rate excluding losses) x (Transmission loss factor-1/Transmission loss factor) in each TOU period	
Transmission loss factors for Distribution connected		Distribution loss factors		Generator loss factor
Distance from Johannesburg		Voltage		
≤ 300km	1.0107	< 500V	1.1111	Cape
> 300km & ≤ 600km	1.0208	≥ 500V & < 66kV	1.0957	Karoo
> 600km & ≤ 900km	1.0310	≥ 66kV & ≤ 132kV	1.0611	Kwazulu-Natal
> 900km	1.0413	> 132kV*	1.0000	Vaal
				Waterberg
				Mpumalanga

\* 132 kV or Transmission connected

## 16. Miniflex tariff

TOU electricity tariff for Urban<sub>p</sub> customers with an NMD from 16 kVA up to 5 MVA, with the following charges:

1. seasonally and **time-of-use** differentiated c/kWh **active energy charges** including losses, based on the voltage of supply and the **Transmission zone**;
2. three **time-of-use periods** namely **peak**, **standard** and **off-peak**, as specified in paragraph 3.2;
3. the treatment of **public holidays** for the raising of the **active energy charge** and the **network demand charge** shall be as specified in paragraph 10;
4. a R/kVA/month **network capacity charge** combining the **Transmission** and **Distribution network capacity charges** based on the voltage of the supply, the **Transmission zone** and the **annual utilised capacity** measured at the **POD** applicable during all time periods.
5. a c/kWh **Distribution network demand charge** based on the voltage of the supply and the energy measured at the **POD** during the **peak** and **standard** periods;
6. a R/kVA **urban low voltage subsidy charge** based on the voltage of the supply and charged on the **annual utilised capacity** measured at the **POD** applicable during all time periods;
7. a c/kWh **ancillary service charge** based on the voltage of the supply applicable during all time periods;
8. a R/Account/day **service charge** based on the sum of the **monthly utilised capacity(s) of each POD linked to an account**;
9. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each **POD** linked to an **account**;
10. a c/kVAh **reactive energy charge** supplied in excess of 30% (0,96 power factor or less) of the kWh recorded during the entire billing period. The excess reactive energy is determined using the billing period totals and will only be applicable during the **high-demand season**;
11. a c/kWh **electrification and rural network subsidy charge**, applied to the total active energy measured at the **POD** in the month;
12. a c/kWh **affordability subsidy charge** applied to the total active energy purchased from Eskom at the **POD** in the month – applicable to **non-local authority** tariffs only; and
13. an **excess network capacity charge** shall be payable in the event of an **NMD** exceedance as specified in paragraph 4.1 in accordance with the **NMD rules** and as set out in Table 41 and Table 42 for the relevant tariff..

**Table 10: Miniflex non-local authority tariff**

**Miniflex - Non-Local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]										Network capacity charge [R/kVA/m]			
		High demand season [Jun - Aug]					Low demand season [Sep - May]								
		Peak	Standard	Off Peak	Peak	Standard	Off Peak	Peak	Standard	Off Peak	Peak	Standard	Off Peak	VAT incl	VAT incl
≤ 300km	< 500V	417.36	479.96	126.98	146.03	69.34	79.74	136.67	157.17	94.30	108.45	60.12	69.14	R 35.62	R 40.96
	≥ 500V & < 66kV	410.81	472.43	124.45	143.12	67.59	77.73	133.99	154.09	92.24	106.08	58.52	67.30	R 32.65	R 37.55
	≥ 66kV & ≤ 132kV	397.80	457.47	120.50	138.58	65.45	75.27	129.78	149.25	89.30	102.70	56.68	65.18	R 18.34	R 21.09
	> 132kV*	374.91	431.15	113.56	130.59	61.68	70.93	122.33	140.68	84.17	96.80	53.41	61.42	R 13.37	R 15.38
> 300km and ≤ 600km	< 500V	420.76	483.87	127.49	146.61	69.22	79.60	137.27	157.86	94.51	108.69	59.96	68.95	R 35.71	R 41.07
	≥ 500V & < 66kV	414.91	477.15	125.68	144.53	68.25	78.49	135.37	155.68	93.15	107.12	59.09	67.95	R 32.75	R 37.66
	≥ 66kV & ≤ 132kV	401.71	461.97	121.68	139.93	66.06	75.97	131.03	150.68	90.18	103.71	57.22	65.80	R 18.41	R 21.17
	> 132kV*	378.67	435.47	114.73	131.94	62.26	71.60	123.51	142.04	84.99	97.74	53.91	62.00	R 13.51	R 15.54
> 600km and ≤ 900km	< 500V	424.95	488.69	128.73	148.04	69.88	80.36	138.62	159.41	95.42	109.73	60.51	69.59	R 35.88	R 41.26
	≥ 500V & < 66kV	419.08	481.94	126.97	146.02	68.94	79.28	136.70	157.21	94.10	108.22	59.69	68.64	R 32.85	R 37.78
	≥ 66kV & ≤ 132kV	405.81	466.68	122.94	141.38	66.75	76.76	132.37	152.23	91.12	104.79	57.81	66.48	R 18.52	R 21.30
	> 132kV*	382.48	439.85	115.85	133.23	62.95	72.39	124.76	143.47	85.86	98.74	54.48	62.65	R 13.70	R 15.76
> 900km	< 500V	429.23	493.61	130.08	149.59	70.60	81.19	140.03	161.03	96.36	110.81	61.15	70.32	R 35.91	R 41.30
	≥ 500V & < 66kV	423.25	486.74	128.20	147.43	69.59	80.03	138.04	158.75	94.99	109.24	60.28	69.32	R 32.96	R 37.90
	≥ 66kV & ≤ 132kV	409.88	471.36	124.15	142.77	67.41	77.52	133.69	153.74	92.02	105.82	58.38	67.14	R 18.59	R 21.38
	> 132kV*	386.21	444.14	117.04	134.60	63.59	73.13	126.06	144.97	86.80	99.82	55.09	63.35	R 13.80	R 15.87

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl		VAT incl	
≤ 100 kVA	R 19.39	R 22.30	R 4.26	R 4.90
> 100 kVA & ≤ 500 kVA	R 88.53	R 101.81	R 24.83	R 28.55
> 500 kVA & ≤ 1 MVA	R 272.39	R 313.25	R 49.30	R 56.70
> 1 MVA	R 272.39	R 313.25	R 122.76	R 141.17
Key customers	R 5 337.86	R 6 138.54	R 170.47	R 196.04

Voltage	Ancillary service charge [c/kWh]		Network demand charge [c/kWh] [Peak & Standard]	
	VAT incl		VAT incl	
< 500V	0.55	0.63	22.05	25.36
≥ 500V & < 66kV	0.54	0.62	9.24	10.63
≥ 66kV & ≤ 132kV	0.52	0.60	3.22	3.70
> 132kV*	0.48	0.55	0.00	0.00

\* 132 kV or Transmission connected

Voltage	Urban low voltage subsidy charge [R/kVA/m]	
	VAT incl	
< 500V	R 0.00	R 0.00
≥ 500V & < 66kV	R 0.00	R 0.00
≥ 66kV & ≤ 132kV	R 19.17	R 22.05
> 132kV*	R 19.17	R 22.05

\* 132 kV or Transmission connected

Electrification and rural network subsidy charge [c/kWh]	Affordability subsidy charge [c/kWh]	
	VAT incl	VAT incl
10.61	12.20	4.98
		5.73

Reactive energy charge [c/kVAh]			
High season	Low season		
	VAT incl	VAT incl	
8.36	9.61	0.00	
		0.00	

**Table 11: Miniflex local authority tariff**

**Miniflex - Local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]									Network capacity charge [R/kVA/m]				
		High demand season [Jun - Aug]						Low demand season [Sep - May]							
		Peak	Standard	Off Peak	Peak	Standard	Off Peak	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl			
≤ 300km	< 500V	437.10	502.67	133.01	152.96	72.58	83.47	143.10	164.57	98.76	113.57	62.95	72.39	R 36.45	R 41.92
	500V & < 66kV	430.21	494.74	130.35	149.90	70.79	81.41	140.34	161.39	96.58	111.07	61.29	70.48	R 33.38	R 38.39
	66kV & ≤ 132kV	416.64	479.14	126.21	145.14	68.55	78.83	135.92	156.31	93.56	107.59	59.34	68.24	R 18.75	R 21.56
	> 132kV*	392.65	451.55	118.95	136.79	64.59	74.28	128.08	147.29	88.15	101.37	55.92	64.31	R 13.69	R 15.74
> 300km and ≤ 600km	< 500V	440.67	506.77	133.49	153.51	72.48	83.35	143.75	165.31	98.96	113.80	62.78	72.20	R 36.52	R 42.00
	500V & < 66kV	434.51	499.69	131.63	151.37	71.48	82.20	141.76	163.02	97.56	112.19	61.88	71.16	R 33.51	R 38.54
	66kV & ≤ 132kV	420.71	483.82	127.44	146.56	69.20	79.58	137.24	157.83	94.45	108.62	59.90	68.89	R 18.85	R 21.68
	> 132kV*	396.57	456.06	120.16	138.18	65.23	75.01	129.34	148.74	89.05	102.41	56.47	64.94	R 13.82	R 15.89
> 600km and ≤ 900km	< 500V	445.06	511.82	134.83	155.05	73.20	84.18	145.16	166.93	99.94	114.93	63.40	72.91	R 36.71	R 42.22
	500V & < 66kV	438.89	504.72	132.94	152.88	72.20	83.03	143.20	164.68	98.49	113.26	62.52	71.90	R 33.60	R 38.64
	66kV & ≤ 132kV	425.00	488.75	128.72	148.03	69.89	80.37	138.59	159.38	95.39	109.70	60.49	69.56	R 18.94	R 21.78
	> 132kV*	400.54	460.62	121.36	139.56	65.89	75.77	130.68	150.28	89.93	103.42	57.05	65.61	R 14.01	R 16.11
> 900km	< 500V	449.52	516.95	136.19	156.62	73.95	85.04	146.65	168.65	100.92	116.06	64.04	73.65	R 36.73	R 42.24
	500V & < 66kV	443.27	509.76	134.27	154.41	72.93	83.87	144.58	166.27	99.51	114.44	63.11	72.58	R 33.74	R 38.80
	66kV & ≤ 132kV	429.27	493.66	130.05	149.56	70.62	81.21	140.02	161.02	96.35	110.80	61.13	70.30	R 19.00	R 21.85
	> 132kV*	404.49	465.16	122.59	140.98	66.62	76.61	132.01	151.81	90.87	104.50	57.67	66.32	R 14.10	R 16.22

\* 132 kV or Transmission connected

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl		VAT incl	
≤ 100 kVA	R 19.72	R 22.68	R 4.32	R 4.97
> 100 kVA & ≤ 500 kVA	R 90.12	R 103.64	R 25.24	R 29.03
> 500 kVA & ≤ 1 MVA	R 277.35	R 318.95	R 50.21	R 57.74
> 1 MVA	R 277.35	R 318.95	R 125.02	R 143.77
Key customers	R 5 434.93	R 6 250.17	R 173.57	R 199.61

Voltage	Ancillary service charge [c/kWh]		Network demand charge [c/kWh]	
	VAT incl		[Peak & VAT incl]	
< 500V	0.57	0.66	22.55	25.93
≥ 500V & < 66kV	0.55	0.63	9.47	10.89
≥ 66kV & ≤ 132kV	0.51	0.59	3.27	3.76
> 132kV*	0.48	0.55	0.00	0.00

\* 132 kV or Transmission connected

Urban low voltage subsidy charge [R/kVA/m]	
Voltage	VAT incl
< 500V	R 0.00 R 0.00
≥ 500V & < 66kV	R 0.00 R 0.00
≥ 66kV & ≤ 132kV	R 19.50 R 22.43
> 132kV*	R 19.50 R 22.43

\* 132 kV or Transmission connected

Electrification and rural network subsidy charge [c/kWh]
VAT incl
10.80 12.42

Reactive energy charge [c/kVAh]			
High season		Low season	
VAT incl		VAT incl	
8.55	9.83	0.00	0.00

## 17. Businessrate tariff

Suite of electricity tariffs for supplies with commercial usage and also for non-commercial supplies such as churches, schools, halls, clinics, old-age homes, public lighting or similar supplies in Urban<sub>p</sub> areas with an NMD of up 100kVA, with the following charges:

1. a single c/kWh active energy charge measured at the POD;
2. a R/POD/day network capacity charge based on the NMD (size) of the supply;
3. a c/kWh network demand charge based on the active energy measured at the POD;
4. a c/kWh ancillary service charge based on the active energy measured at the POD; and
5. a R/day service and administration charge for each POD, which charge shall be payable every month whether any electricity is used or not, based on the applicable daily rate and the number of days in the month, and
6. if and when the Businessrate 1,2 or 3 is offered as a prepaid supply, the active energy charge, the ancillary service charge and the network capacity charge shall be combined into one c/kWh rate and the network demand charge and the service and administration charge shall be combined into R/POD per day charge\*

The suite of Businessrate tariffs are categorised as follows:

<b>Businessrate 1</b>	single-phase <b>16 kVA</b> (80 A per phase) dual-phase <b>32 kVA</b> (80 A per phase) three-phase <b>25 kVA</b> (40 A per phase)
<b>Businessrate 2</b>	dual-phase <b>64 kVA</b> (150 A per phase) three-phase <b>50 kVA</b> (80 A per phase)
<b>Businessrate 3</b>	dual-phase <b>100 kVA</b> (225 A per phase) three-phase <b>100 kVA</b> (150 A per phase)
<b>Businessrate 4 (conventional or prepaid)</b>	single-phase <b>16 kVA</b> (80 A per phase) dual-phase <b>32 kVA</b> (80 A per phase) three-phase <b>25 kVA</b> (40 A per phase)

\*Currently these tariffs cannot be accommodated as a prepaid supply. If and when this is possible, the combining of the charges is required to accommodate the prepaid vending system.

Table 12: Businessrate non-local authority tariff

### Businessrate - Non-local Authority

	Energy charge [c/kWh]		Ancillary service charge [c/kWh]		Network demand charge [c/kWh]		Network capacity charge [R/POD/day]		Service and administration charge [R/POD/day]	
	VAT incl		VAT incl		VAT incl		VAT incl		VAT incl	
<b>Businessrate 1</b>	142.89	164.32	0.55	0.63	20.17	23.2	R 28.97	R 33.32	R 25.03	R 28.78
<b>Businessrate 2</b>	142.89	164.32	0.55	0.63	20.17	23.2	R 48.81	R 56.13	R 25.03	R 28.78
<b>Businessrate 3</b>	142.89	164.32	0.55	0.63	20.17	23.2	R 84.33	R 96.98	R 25.03	R 28.78
<b>Businessrate 4</b>	384.54	442.22	0.55	0.63	20.17	23.2				

Table 13: Businessrate local authority tariff

### Businessrate - Local Authority

	Energy charge [c/kWh]		Ancillary service charge [c/kWh]		Network demand charge [c/kWh]		Network capacity charge [R/POD/day]		Service and administration charge [R/POD/day]	
	VAT		VAT		VAT		VAT		VAT incl	
<b>Businessrate 1</b>	149.65	172.10	0.57	0.66	20.74	23.85	R 29.74	R 34.20	R 25.47	R 29.29
<b>Businessrate 2</b>	149.65	172.10	0.57	0.66	20.74	23.85	R 50.16	R 57.68	R 25.47	R 29.29
<b>Businessrate 3</b>	149.65	172.10	0.57	0.66	20.74	23.85	R 86.68	R 99.68	R 25.47	R 29.29
<b>Businessrate 4</b>	402.72	463.13	0.57	0.66	20.74	23.85				

## 18. Public Lighting

Non metered\* electricity tariff for public lighting or similar supplies in Urban<sub>p</sub> areas where Eskom provides a supply for, and if applicable maintains, any street light or similar public lighting and where, the charge for the supply and service is fixed based on the number of lights and light fixtures. This tariff is applicable only in Eskom-designated urban areas.

The suite of Public Lighting tariffs are categorised as follows:

All night (typically streetlights)	333,3 hours per month
24 hours (typically traffic lights)	730 hours per month
Urban fixed (typically telephony installations)	Based on 200 kWh per month
<i>*For metered public lighting or similar supplies refer to Businessrate</i>	

Table 14: Public Lighting non-local authority tariff

### Public Lighting - Non-local Authority

		All Night		24 Hours	
		VAT incl		VAT incl	
Public Lighting	Energy charge [c/kWh]	113.71	130.77	152.26	175.10
	Energy charge [R/100W/month]	R 35.58	R 40.92	R 102.55	R 117.93
Public Lighting - Urban Fixed	Fixed charge [R/POD/day]	R 7.48	R 8.60		
Maintenance charges		R/month			
		VAT incl			
	Per luminaire	R 60.30	69.35		
	Per high-mast luminaire	R 1 403.69	R 1 614.24		

Table 15: Public Lighting local authority tariff

### Public Lighting - Local Authority

		All Night		24 Hours	
		VAT incl		VAT incl	
Public Lighting	Energy charge [c/kWh]	120.80	138.92	161.75	186.01
	Energy charge [R/100W/month]	R 36.89	R 42.42	R 106.34	R 122.29
Public Lighting - Urban Fixed	Fixed charge [R/POD/day]	R 7.94	R 9.13		
Maintenance charges		R/month			
		VAT incl			
	Per luminaire	R 63.74	73.30		
	Per high-mast luminaire	R 1 488.65	R 1 711.95		

## RESIDENTIAL TARIFFS

### 19. Homepower tariffs

The suite of Homepower tariffs are categorised as follows:

<b>Homepower 1</b>	dual-phase <b>32 kVA</b> (80 A per phase) three-phase <b>25 kVA</b> (40 A per phase)
<b>Homepower 2</b>	dual-phase <b>64 kVA</b> (150 A per phase) three-phase <b>50 kVA</b> (80 A per phase)
<b>Homepower 3</b>	dual-phase <b>100 kVA</b> (225 A per phase) three-phase <b>100 kVA</b> (150 A per phase)
<b>Homepower 4</b>	single-phase <b>16 kVA</b> (80 A per phase)
<b>Homepower Bulk</b>	No limit

#### 19.1. Homepower Standard tariff

Suite of electricity tariffs for residential customers and also may be applied to supplies such as churches, schools, halls, clinics, old-age homes or similar supplies in Urban areas with an NMD of up to 100 kVA, with the following charges:

1. Inclining block rate c/kWh **energy charges** applied to all energy consumed, divided into two consumption blocks; and
2. a R/POD/day **network capacity charge** based on the **NMD** (size) of the supply; and

#### 19.2. Homepower Bulk tariff

An electricity tariff for residential bulk supplies to sectional title developments\* only, applicable to non-local authority supplies only with the following charges:

1. a c/kWh **energy charges** applied to all energy consumed, and
2. a R/kVA **network capacity charge** based on the **NMD** or if measured the **maximum demand** of the supply;

\*Sectional title developments also have a choice of other applicable tariffs such as Homepower Standard, Miniflex and Nightsave Urban Small.

**Table 16: Homepower Standard and Homepower Bulk non-local authority tariff**

### Homepower - Non-local Authority

	Energy charge [c/kWh]				Network capacity charge [R/POD/day]	
	Block 1 [>0 - 600 kWh]	VAT incl	Block 2 [>600 kWh]	VAT incl	VAT incl	
<b>Homepower 1</b>	<b>167.47</b>	<i>192.59</i>	<b>264.44</b>	<i>304.11</i>	<b>R 7.17</b>	<i>R 8.25</i>
<b>Homepower 2</b>	<b>167.47</b>	<i>192.59</i>	<b>257.84</b>	<i>296.52</i>	<b>R 13.44</b>	<i>R 15.46</i>
<b>Homepower 3</b>	<b>167.47</b>	<i>192.59</i>	<b>257.84</b>	<i>296.52</i>	<b>R 27.75</b>	<i>R 31.91</i>
<b>Homepower 4</b>	<b>167.47</b>	<i>192.59</i>	<b>269.31</b>	<i>309.71</i>	<b>R 4.38</b>	<i>R 5.04</i>

	Energy charge [c/kWh]		Network capacity charge [R/kVA]	
	VAT incl		VAT incl	
<b>Homepower Bulk</b>	<b>219.88</b>	<i>252.86</i>	<b>R 45.51</b>	<i>R 52.34</i>

\* The Network capacity charge is based on the NMD or on the maximum demand if measured.

**Table 17: Homepower Standard local authority tariff**

<b>Homepower - Local Authority</b>						
	Energy charge [c/kWh]		Energy charge [c/kWh]		Network capacity charge [R/POD/day]	
	Block 1 [>0 - 600 kWh]	VAT <i>incl</i>	Block 2 [>600 kWh]	VAT <i>incl</i>	VAT <i>incl</i>	
Homepower 1	171.32	197.02	270.50	311.08	R 7.33	R 8.43
Homepower 2	171.32	197.02	263.72	303.28	R 13.75	R 15.81
Homepower 3	171.32	197.02	263.72	303.28	R 28.40	R 32.66
Homepower 4	171.32	197.02	275.48	316.80	R 4.49	R 5.16

## 20. Homelight non-local authority tariff

Suite of electricity tariffs based on the size of the supply that provides a subsidy to low-usage single phase residential , churches, schools, halls, clinics, old-age homes or similar supplies in Urban<sub>p</sub> areas and electrification areas and has the following charges:

1. Inclining block rate c/kWh **energy charges** applied to all energy consumed, divided into two consumption blocks;

The Homelight suite of tariffs is made up of the following tariffs:

Homelight 20A	20A supply size (NMD) typically for low consuming supplies
Homelight 60A	60A prepayment or 80A conventionally metered supply size (NMD) typically for medium to high consuming supplies

**Table 18: Homelight non-local authority tariff**

## Homelight - Non-local Authority

Homelight 60A	Energy charge [c/kWh]	
	VAT <i>incl</i>	
Block 1 [ > 0 - 600 kWh]	158.44	182.21
Block 2 [>600 kWh]	269.31	309.71

Homelight 20A	Energy charge [c/kWh]	
	VAT <i>incl</i>	
Block 1 [ > 0 - 350 kWh]	139.99	160.99
Block 2 [>350 kWh]	158.62	182.41

## RURAL TARIFFS

### 21. Nightsave Rural tariff

Electricity tariff for high load factor Rural<sub>p</sub> customers, with an NMD from 25 kVA at a supply voltage < 22 kV (or 33 kV where designated by Eskom as Rural<sub>p</sub>), and has the following charges:

1. seasonally differentiated c/kWh **active energy charges** including losses based on the voltage of the supply and the **Transmission zone**;
2. seasonally differentiated R/kVA **energy demand charges** based on the voltage of the supply, the **Transmission zone** and charged on the **chargeable demand** in **peak** periods as specified in paragraph 3.1;
3. the treatment of **public holidays** for the raising of the **energy demand charge** and the **network demand charge** shall be as specified in paragraph 10;
4. a bundled R/kVA month **Transmission** and **Distribution network capacity charge** based on the voltage of the supply, the **Transmission zone** and the **annual utilised capacity** measured at the **POD** applicable during all time periods;
5. a c/kWh **Distribution network demand charge** based on the voltage of the supply and the energy measured at the **POD** during all the **TOU periods**;
6. a c/kWh **ancillary service charge** based on the voltage of the supply applicable during all time periods;
7. a R/Account/day **service charge** based on the sum of the **monthly utilised capacity(s) of each POD linked to an account**;
8. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each **POD** linked to an **account**; and
9. an **excess network capacity charge** shall be payable in the event of an **NMD** exceedance as specified in paragraph 4.1 in accordance with the **NMD rules** and as set out in Table 41 and Table 42 for the relevant tariff..

**Table 19: Nightsave Rural non-local authority tariff**

**Nightsave Rural - Non-local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]				Energy demand charges [R/kVA/m]				Network capacity charges [R/kVA/m]	
		High demand season [Jun - Aug]		Low demand season [Sep - May]		High demand season [Jun - Aug]		Low demand season [Sep - May]			
		VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl		
≤ 300km	< 500V	105.41	121.22	81.90	94.19	R 353.18	R 406.16	R 186.91	R 214.95	R 17.86	R 20.54
	≥ 500V & ≤ 22kV	104.16	119.78	80.98	93.13	R 342.23	R 393.56	R 180.29	R 207.33	R 16.41	R 18.87
> 300km and ≤ 600km	< 500V	106.44	122.41	82.73	95.14	R 357.43	R 411.04	R 189.53	R 217.96	R 17.89	R 20.57
	≥ 500V & ≤ 22kV	105.23	121.01	81.80	94.07	R 346.41	R 398.37	R 182.80	R 210.22	R 16.47	R 18.94
> 600km and ≤ 900km	< 500V	107.51	123.64	83.53	96.06	R 361.73	R 415.99	R 192.08	R 220.89	R 18.06	R 20.77
	≥ 500V & ≤ 22kV	106.27	122.21	82.61	95.00	R 350.56	R 403.14	R 185.32	R 213.12	R 16.58	R 19.07
> 900km	< 500V	108.58	124.87	84.37	97.03	R 366.12	R 421.04	R 194.72	R 223.93	R 18.11	R 20.83
	≥ 500V & ≤ 22kV	107.29	123.38	83.42	95.93	R 354.85	R 408.08	R 187.90	R 216.09	R 16.61	R 19.10

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl	VAT incl	VAT incl	VAT incl
≤ 100 kVA	R 24.55	R 28.23	R 6.97	R 8.02
> 100 kVA & ≤ 500 kVA	R 83.72	R 96.28	R 38.82	R 44.64
> 500 kVA & ≤ 1 MVA	R 257.56	R 296.19	R 59.58	R 68.52
> 1 MVA	R 257.56	R 296.19	R 110.55	R 127.13
Key customers	R 5 047.97	R 5 805.17	R 110.55	R 127.13

Voltage	Ancillary service charge [c/kWh]		Network demand charge [c/kWh] in all time-of-use periods	
	VAT incl	VAT incl	VAT incl	VAT incl
< 500V	0.55	0.63	35.53	40.86
≥ 500V & ≤ 22kV	0.55	0.63	31.15	35.82

**Table 20: Nightsave Rural local authority tariff**

**Nightsave Rural - Local Authority**

Transmission zone	Voltage	Active energy charge [c/kWh]				Energy demand charges [R/kVA/m]				Network capacity charges [R/kVA/m]	
		High demand season [Jun - Aug]		Low demand season [Sep - May]		High demand season [Jun - Aug]		Low demand season [Sep - May]			
		VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl		
≤ 300km	< 500V	110.39	126.95	85.78	98.65	R 361.25	R 415.44	R 191.21	R 219.89	R 18.45	R 21.22
	≥ 500V & ≤ 22kV	109.09	125.45	84.82	97.54	R 350.07	R 402.58	R 184.38	R 212.04	R 16.94	R 19.48
> 300km and ≤ 600km	< 500V	111.50	128.23	86.65	99.65	R 365.64	R 420.49	R 193.85	R 222.93	R 18.48	R 21.25
	≥ 500V & ≤ 22kV	110.18	126.71	85.65	98.50	R 354.35	R 407.50	R 186.96	R 215.00	R 17.01	R 19.56
> 600km and ≤ 900km	< 500V	112.57	129.46	87.48	100.60	R 370.01	R 425.51	R 196.46	R 225.93	R 18.66	R 21.46
	≥ 500V & ≤ 22kV	111.26	127.95	86.51	99.49	R 358.61	R 412.40	R 189.56	R 217.99	R 17.12	R 19.69
> 900km	< 500V	113.71	130.77	88.34	101.59	R 374.50	R 430.68	R 199.16	R 229.03	R 18.69	R 21.49
	≥ 500V & ≤ 22kV	112.36	129.21	87.34	100.44	R 362.98	R 417.43	R 192.20	R 221.03	R 17.13	R 19.70

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl	VAT incl	VAT incl	VAT incl
≤ 100 kVA	R 25.00	R 28.75	R 7.09	R 8.15
> 100 kVA & ≤ 500 kVA	R 85.25	R 98.04	R 39.52	R 45.45
> 500 kVA & ≤ 1 MVA	R 262.27	R 301.61	R 60.64	R 69.74
> 1 MVA	R 262.27	R 301.61	R 112.56	R 129.44
Key customers	R 5 139.74	R 5 910.70	R 112.56	R 129.44

Voltage	Ancillary service charge [c/kWh]		Network demand charge [c/kWh] in all time-of-use periods	
	VAT incl	VAT incl	VAT incl	VAT incl
< 500V	0.57	0.66	36.71	42.22
≥ 500V & ≤ 22kV	0.57	0.66	32.12	36.94

## 22. Ruraflex tariff

**TOU electricity tariff for Rural<sub>p</sub> customers with dual and three-phase supplies with an NMD from 16 kVA with a supply voltage <22 kV (or 33 kV where designated by Eskom as Rural<sub>p</sub>) and has the following charges:**

1. seasonally and **time-of-use** differentiated c/kWh **active energy charges** including losses, based on the voltage of supply and the **Transmission zone**;
2. three **time-of-use periods** namely **peak, standard** and **off-peak**, as specified in paragraph 3.2;
3. the treatment of **public holidays** for the raising of the **active energy charge** and the **network demand charge** shall be as specified in paragraph 10;
4. a R/kVA/month **network capacity charge** combining the **Transmission** and **Distribution network capacity charges** based on the voltage of the supply, the **Transmission zone** and the **annual utilised capacity** measured at the **POD** applicable during all time periods;
5. a c/kWh **Distribution network demand charge** based on the voltage of the supply and the energy measured at the **POD** during all the **TOU periods**;
6. a c/kWh **ancillary service charge** based on the voltage of the supply applicable during all time periods;
7. a R/Account/day **service charge** based on the sum of the **monthly utilised capacity(s) of each POD linked to an account**;
8. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each **POD** linked to an **account**;
9. a c/kVAh **reactive energy charge** supplied in excess of 30% (0,96 power factor or less) of the kWh recorded during the entire billing period. The excess reactive energy is determined using the billing period totals and will only be applicable during the **high-demand season**; and
10. an **excess network capacity charge** shall be payable in the event of an **NMD** exceedance as specified in paragraph 4.1 in accordance with the **NMD rules** and as set out in Table 41 and Table 42 for the relevant tariff.

**Table 21: Ruraflex non-local authority tariff**

Ruraflex - Non-local Authority															
Transmission zone	Voltage	Active energy charge [c/kWh]											Network capacity charges [R/kVA/m]		
		High demand season [Jun - Aug]						Low demand season [Sep - May]							
		Peak	Standard	Off Peak	Peak	Standard	Off Peak	Peak	Standard	Off Peak	VAT incl	VAT incl	VAT incl		
≤ 300km	< 500V	432.14	496.96	130.92	150.56	71.11	81.78	140.97	162.12	97.01	111.56	61.55	70.78	R 24.96	R 28.70
	500V & ≤ 22kV	427.87	492.05	129.63	149.07	70.38	80.94	139.59	160.53	96.05	110.46	60.91	70.05	R 22.87	R 26.30
> 300km and ≤ 600km	< 500V	436.48	501.95	132.23	152.06	71.81	82.58	142.38	163.74	98.00	112.70	62.18	71.51	R 25.03	R 28.78
	500V & ≤ 22kV	432.13	496.95	130.90	150.54	71.11	81.78	140.97	162.12	97.00	111.55	61.55	70.78	R 23.01	R 26.46
> 600km and ≤ 900km	< 500V	440.85	506.98	133.56	153.59	72.52	83.40	143.81	165.38	98.96	113.80	62.80	72.22	R 25.16	R 28.93
	500V & ≤ 22kV	436.46	501.93	132.20	152.03	71.81	82.58	142.38	163.74	98.00	112.70	62.18	71.51	R 23.12	R 26.59
> 900km	< 500V	445.25	512.04	134.88	155.11	73.24	84.23	145.19	166.97	99.95	114.94	63.42	72.93	R 25.27	R 29.06
	500V & ≤ 22kV	440.84	506.97	133.56	153.59	72.52	83.40	143.81	165.38	98.96	113.80	62.80	72.22	R 23.13	R 26.60

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl	VAT incl	VAT incl	VAT incl
≤ 100 kVA	R 24.55	R 28.23	R 6.97	R 8.02
> 100 kVA & ≤ 500 kVA	R 83.72	R 96.28	R 38.82	R 44.64
> 500 kVA & ≤ 1 MVA	R 257.56	R 296.19	R 59.58	R 68.52
> 1 MVA	R 257.56	R 296.19	R 110.55	R 127.13
Key customers	R 5 047.97	R 5 805.17	R 110.55	R 127.13

Voltage	Ancillary service charge [c/kWh]		Network demand charge [c/kWh] in all time-of-use periods	
	VAT incl	VAT incl	VAT incl	VAT incl
< 500V	0.55	0.63	35.53	40.86
≥ 500V & < 22kV	0.55	0.63	31.15	35.82

Reactive energy charge [c/kVArh]			
High season		Low season	
VAT incl	VAT incl	VAT incl	VAT incl
12.00	13.80	0.00	0.00

**Table 22: Ruraflex local authority tariff**

Ruraflex - Local Authority															
Transmission zone	Voltage	Active energy charge [c/kWh]											Network capacity charges [R/kVA/m]		
		High demand season [Jun - Aug]						Low demand season [Sep - May]							
		Peak	Standard	Off Peak	Peak	Standard	Off Peak	Peak	Standard	Off Peak	VAT incl	VAT incl	VAT incl		
≤ 300km	< 500V	452.60	520.49	137.10	157.67	74.46	85.63	147.65	169.80	101.61	116.85	64.46	74.13	R 25.74	R 29.60
	≥ 500V & ≤ 22kV	448.10	515.32	135.75	156.11	73.71	84.77	146.20	168.13	100.58	115.67	63.81	73.38	R 23.62	R 27.16
> 300km and ≤ 600km	< 500V	457.10	525.67	138.50	159.28	75.17	86.45	149.09	171.45	102.63	118.02	65.12	74.89	R 25.85	R 29.73
	≥ 500V & ≤ 22kV	452.59	520.48	137.07	157.63	74.46	85.63	147.65	169.80	101.59	116.83	64.46	74.13	R 23.75	R 27.31
> 600km and ≤ 900km	< 500V	461.69	530.94	139.84	160.82	75.95	87.34	150.58	173.17	103.62	119.16	65.77	75.64	R 25.99	R 29.89
	≥ 500V & ≤ 22kV	457.08	525.64	138.47	159.24	75.17	86.45	149.09	171.45	102.63	118.02	65.12	74.89	R 23.87	R 27.45
> 900km	< 500V	466.30	536.25	141.29	162.48	76.66	88.16	152.07	174.88	104.70	120.41	66.42	76.38	R 26.07	R 29.98
	≥ 500V & ≤ 22kV	461.68	530.93	139.84	160.82	75.95	87.34	150.58	173.17	103.62	119.16	65.77	75.64	R 23.88	R 27.46

Customer categories	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl	VAT incl	VAT incl	VAT incl
≤ 100 kVA	R 25.00	R 28.75	R 7.09	R 8.15
> 100 kVA & ≤ 500 kVA	R 85.25	R 98.04	R 39.52	R 45.45
> 500 kVA & ≤ 1 MVA	R 262.27	R 301.61	R 60.64	R 69.74
> 1 MVA	R 262.27	R 301.61	R 112.56	R 129.44
Key customers	R 5 139.74	R 5 910.70	R 112.56	R 129.44

Voltage	Ancillary service charge [c/kWh]		Network demand charge [c/kWh] in all time-of-use periods	
	VAT incl	VAT incl	VAT incl	VAT incl
< 500V	0.57	0.66	36.71	42.22
≥ 500V & < 22kV	0.57	0.66	32.12	36.94

Reactive energy charge [c/kVArh]			
High season		Low season	
VAT incl	VAT incl	VAT incl	VAT incl
12.20	14.03	0.00	0.00

## 23. Ruraflex Gen tariff

An electricity tariff for Rural<sub>p</sub> customers consuming energy (importers of energy from the Eskom System) and generating energy (exporters of energy to the Eskom System) at the same point of supply (or metering point). The following charges shall apply for the consumption and generation of energy:

- seasonally and time-of-use differentiated c/kWh **active energy charges** including losses, based on the voltage of supply and the **Transmission zone**;
- three **time-of-use periods** namely **peak**, **standard** and **off-peak**, as specified in paragraph 3.2;
- the treatment of **public holidays** for the raising of the **active energy charge** and the **network demand charge** shall be as specified in paragraph 10;
- a R/kVA/month **network capacity charge** combining the **Transmission** and **Distribution network capacity charges** based on the voltage of the supply, the **Transmission zone** and the **annual utilised capacity** measured at the **POD** applicable during all time periods;
- a c/kWh **Distribution network demand charge** based on the voltage of the supply and the energy measured at the **POD** during the all **TOU periods**;
- a c/kWh **ancillary service charge** applied on the total active energy supplied and produced in the month based on the voltage of the supply applicable during all time periods;
- a R/account per day **service charge** based on the higher of the sum of the **monthly utilised capacity(s)** or the sum of the **monthly maximum exported capacity(s)** of all **PODS/points of supply** linked to an account;
- a R/per day **administration charge** based on the **monthly utilised capacity** and the **monthly maximum exported capacity** of each **POD/point of supply/service agreement/** linked to an account;
- a c/kvarh **reactive energy charge** supplied in excess of 30% (0,96 PF) of the kWh recorded during the entire billing period. The excess reactive energy is determined using the billing period totals and will only be applicable during the **high-demand season**; and
- an **excess network capacity charge** shall be payable in the event of an **NMD** exceedance as specified in paragraph 4.1 in accordance with the **NMD rules** and as set out in Table 41 and Table 42 for the relevant tariff.

**Table 23: Ruraflex Gen tariff**

Ruraflex Gen - Non-Local Authority															
Transmission zone	Voltage	Active energy charge for loads [c/kWh]									Network capacity charges [R/kVA/m]				
		High demand season [Jun - Aug]						Low demand season [Sep - May]			VAT incl	VAT incl			
		Peak	Standard		Off Peak		Peak	Standard	Off Peak						
VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl	VAT incl					
≤ 300km	< 500V	432.14	496.96	130.92	150.56	71.11	81.78	140.97	162.12	97.01	111.56	61.55	70.78	R 24.96	R 28.70
	≥ 500V & ≤ 22kV	427.87	492.05	129.63	149.07	70.38	80.94	139.59	160.53	96.05	110.46	60.91	70.05	R 22.87	R 26.30
> 300km and ≤ 600km	< 500V	436.48	501.95	132.23	152.06	71.81	82.58	142.38	163.74	98.00	112.70	62.18	71.51	R 25.03	R 28.78
	≥ 500V & ≤ 22kV	432.13	496.95	130.90	150.54	71.11	81.78	140.97	162.12	97.00	111.55	61.55	70.78	R 23.01	R 26.46
> 600km and ≤ 900km	< 500V	440.85	506.98	133.56	153.59	72.52	83.40	143.81	165.38	98.96	113.80	62.80	72.22	R 25.16	R 28.93
	≥ 500V & ≤ 22kV	436.46	501.93	132.20	152.03	71.81	82.58	142.38	163.74	98.00	112.70	62.18	71.51	R 23.12	R 26.59
> 900km	< 500V	445.25	512.04	134.88	155.11	73.24	84.23	145.19	166.97	99.95	114.94	63.42	72.93	R 25.27	R 29.06
	≥ 500V & ≤ 22kV	440.84	506.97	133.56	153.59	72.52	83.40	143.81	165.38	98.96	113.80	62.80	72.22	R 23.13	R 26.60

Customer categories [kVA or MVA = loads] [kW or MW = generators]	Service charge [R/account/day]		Administration charge [R/POD/day]	
	VAT incl	VAT incl	VAT incl	VAT incl
≤ 100 kVA/kW	R 24.55	R 28.23	R 6.97	R 8.02
> 100 kVA/kW & ≤ 500 kVA/kW	R 83.72	R 96.28	R 38.82	R 44.64
> 500 kVA/kW & ≤ 1 MVA/MW	R 257.56	R 296.19	R 59.58	R 68.52
> 1 MVA/MW	R 257.56	R 296.19	R 110.55	R 127.13
Key customers	R 5 047.97	R 5 805.17	R 110.55	R 127.13

Voltage	Ancillary service charge for loads and generators [c/kWh]		Network demand charge [c/kWh] for loads in all time-of-use periods	
	VAT incl	VAT incl	VAT incl	VAT incl
< 500V	0.55	0.63	35.53	40.86
≥ 500V & < 22kV	0.55	0.63	31.15	35.82

Reactive energy charge [c/kVArh]			
High season	Low season		
	VAT incl	VAT incl	VAT incl
12.00	13.80	0.00	0.00

## 24. Landrate, Landrate Dx and Landlight tariffs

The suite of Landrate, Landrate Dx and Landlight tariffs are categorised as follows:

<b>Landrate 1</b>	single-phase <b>16 kVA</b> (80 A per phase) dual-phase <b>32 kVA</b> (80 A per phase) three-phase <b>25 kVA</b> (40 A per phase)
<b>Landrate 2</b>	dual-phase <b>64 kVA</b> (150 A per phase) three-phase <b>50 kVA</b> (80 A per phase)
<b>Landrate 3</b>	dual-phase <b>100 kVA</b> (225 A per phase) three-phase <b>100 kVA</b> (150 A per phase)
<b>Landrate 4+</b>	single-phase <b>16 kVA</b> (80 A per phase)
<b>Landrate Dx*</b>	single-phase <b>5 kVA</b> (limited to 10 A per phase)
<b>Landlight 20A</b>	single-phase <b>20A</b>
<b>Landlight 60A</b>	Single-phase <b>60A</b>

### 24.1. Landrate 1, 2, 3 and 4

Suite of electricity tariffs for Rural<sub>p</sub> customers with single, dual or three-phase conventionally metered supplies with an NMD up to 100 kVA with a supply voltage < 500 V with the following charges:

1. a single c/kWh **active energy charge** measured at the **POD**;
2. a R/day/POD **network capacity charge** based on the **NMD** of the supply;
3. a c/kWh **network demand charge** based on the active energy measured at the **POD**;
4. a c/kWh **ancillary service charge** based on the active energy measured at the **POD**; and
5. a R/day **service and administration charge** for each **POD (Landrate 1,2 and 3)**, which charge shall be payable every month whether any electricity is used or not, based on the applicable daily rate and the number of days in the month, and
6. if and when the Landrate 1,2,3, and 4 is offered as a prepaid supply\*, the **active energy charge**, the **ancillary service charge** and the **network capacity charge** shall be combined into one c/kWh rate and the **network demand charge** and the **service and administration charge** (if applicable) shall be combined into R/POD per day charge\*.

\*Currently these tariffs cannot be accommodated as a prepaid supply. If and when this is possible, the combining of the charges is required to accommodate the prepaid vending system.

### 24.2. Landrate Dx

An electricity tariff for Rural<sub>p</sub> single phase non-metered supplies limited to 5kVA typically suited to small telecommunication installations where the electricity usage is low enough not to warrant metering for billing purposes and has the following charges:

1. A R/day R/POD fixed charge based on Landrate 4 at 200 kWh per month.

### 24.3. Landlight

An electricity tariff that provides a subsidy to low-usage single phase supplies in rural<sub>p</sub> areas and is only offered as a prepaid supply and has the following charges:

1. a single c/kWh active energy charge.

**Table 24: Landrate, Landrate Dx and Landlight non-local authority tariff**

Landrate - Non-local Authority										
	Energy charge [c/kWh]		Ancillary service charge [c/kWh]		Network demand charge [c/kWh]		Network capacity charge [R/POD/day]		Service charge [R/POD/day]	
	VAT incl		VAT incl		VAT incl		VAT incl		VAT incl	
<b>Landrate 1</b>	<b>142.19</b>	163.52	<b>0.55</b>	0.63	<b>35.53</b>	40.86	<b>R 37.98</b>	R 43.68	<b>R 31.54</b>	R 36.27
<b>Landrate 2</b>	<b>142.19</b>	163.52	<b>0.55</b>	0.63	<b>35.53</b>	40.86	<b>R 58.38</b>	R 67.14	<b>R 31.54</b>	R 36.27
<b>Landrate 3</b>	<b>142.19</b>	163.52	<b>0.55</b>	0.63	<b>35.53</b>	40.86	<b>R 93.33</b>	R 107.33	<b>R 31.54</b>	R 36.27
<b>Landrate 4</b>	<b>307.12</b>	353.19	<b>0.55</b>	0.63	<b>35.53</b>	40.86	<b>R 30.24</b>	R 34.78	<b>R 0.00</b>	R 0.00
<b>Landlight 20A</b>	<b>408.87</b>	470.20								
<b>Landlight 60A</b>	<b>527.08</b>	606.14								
<b>Landrate Dx*</b>									<b>R 67.64</b>	R 77.79

\*R/day fixed charge inclusive of the following charges; energy, ancillary service, network demand, network capacity and service charge.

Table 25: Landrate and Landrate Dx local authority tariff

Landrate - Local Authority										
	Energy charge [c/kWh]		Ancillary service charge [c/kWh]		Network demand charge [c/kWh]		Network capacity charge [R/POD/day]		Service charge [R/POD/day]	
	<i>VAT incl</i>		<i>VAT incl</i>		<i>VAT incl</i>		<i>VAT incl</i>		<i>VAT incl</i>	
Landrate 1	148.91	171.25	0.57	0.66	36.71	42.22	R 39.20	R 45.08	R 32.09	R 36.90
Landrate 2	148.91	171.25	0.57	0.66	36.71	42.22	R 60.25	R 69.29	R 32.09	R 36.90
Landrate 3	148.91	171.25	0.57	0.66	36.71	42.22	R 96.35	R 110.80	R 32.09	R 36.90
Landrate 4	321.63	369.87	0.57	0.66	36.71	42.22	R 31.22	R 35.90		
Landrate Dx*									R 69.43	R 79.85

\*R/day fixed charge inclusive of the following charges; energy, ancillary service, network demand, network capacity and service charge.

## USE-OF-SYSTEM CHARGES

The following charges are the charges for the use of the **Distribution and Transmission System** as contained in Eskom's tariffs. The rates provided in this section for **use-of-system** charges are the rates applicable to **non-local authority tariffs**. The use-of-system charges applicable to **local-authorities** are explained for each charge where applicable.

The **NMD and MEC rules** shall apply to all relevant **use-of-system** charges.

### 25. Loss factors

The **active energy charges** are shown inclusive of losses for **Distribution and Transmission** at the applicable **loss factors**, which differ by the voltage category and **transmission zone**;

#### 25.1. Loss factors (Distribution – loads and generators)

The **Distribution** loss factors for loads and generators connected to **Distribution System** as measured at the point of supply/**POD** are given in the table below.

- The same **loss factors** shall apply for **loads** as well as for the calculation of the **distribution losses charge** (refer to paragraph 35) for **Distribution** connected generators;

**Table 26: Loss factors (Distribution – loads and generators)**

Distribution loss factors		
Voltage	Urban loss factor	Rural loss factor
< 500V	1.1111	1.1527
≥ 500V & < 66kV	1.0957	1.1412
≥ 66kV & ≤ 132kV	1.0611	
> 132kV/Transmission connected	1.0000	

#### 25.2. Loss factors (Transmission – loads)

The Transmission loss factors for loads connected to the **Distribution and Transmission System** as measured at the **point of supply/POD** are given in the table below.

- Refer to Figure 3 for a map of the **Transmission zones** applicable to loads

**Table 27: Loss factors (Transmission – loads)**

Transmission loss factors for loads		
Distance from Johannesburg	Zone	Loss factor
≤ 300km	0	1.0107
> 300km & ≤ 600km	1	1.0208
> 600km & ≤ 900km	2	1.0310
> 900km	3	1.0413

#### 25.3. Transmission loss factors for Transmission connected generators

The loss factors applied to all energy generated as measured at the **point of supply** for generators connected to the **Transmission System** are given in the table below.

- Refer to Figure 4 for a map of the **Transmission zones** applicable to generators

**Table 28: Loss factors for Transmission connected generators**

Loss factors for Transmission connected generators	Loss factor
Cape	0.971
Karoo	0.995
Kwazulu-Natal	1.004
Vaal	1.020
Waterburg	1.023
Mpumalanga	1.021

## 25.4. TUoS (> 132 KV or direct Transmission connected) losses charge for generators

Losses charges = energy produced in **peak, standard** and **off-peak** periods x WEPS rates excluding losses in each TOU period x (Transmission loss factor (for generators) -1)/Transmission loss factor (for generators).

## 26. TUoS (> 132 KV or direct Transmission connected) network charge for loads

The **TUoS** charges are payable by all loads connected to the **Transmission System** based on the **annual utilised capacity** and are given in the table below.

**Table 29: TUoS network charge for direct Transmission connected loads**

TUoS network charge for Transmission connected loads	Network capacity charge <i>VAT incl</i>	
≤ 300km	<b>R 13.43</b>	<i>R 15.44</i>
> 300km & ≤ 600km	<b>R 13.55</b>	<i>R 15.58</i>
> 600km & ≤ 900km	<b>R 13.75</b>	<i>R 15.81</i>
> 900km	<b>R 13.85</b>	<i>R 15.93</i>

- Refer to Figure 3 for a map of the **Transmission zones** applicable to loads.
- The charges applicable to local authorities are the WEPS local authority > 132 kV Transmission network charge.

## 27. TUoS network charge for generators

The **TUoS** charges are payable by all generators connected to the **Transmission System** based on the **maximum export capacity** and are given in the table below.

**Table 30: TUoS network charge for Transmission connected generators**

TUoS network charges for Transmission connected generators	Network charge <i>VAT incl</i>	
Cape	<b>R 0.00</b>	<i>R 0.00</i>
Karoo	<b>R 0.00</b>	<i>R 0.00</i>
Kwazulu-Natal	<b>R 2.82</b>	<i>R 3.24</i>
Vaal	<b>R 9.39</b>	<i>R 10.80</i>
Waterberg	<b>R 12.02</b>	<i>R 13.82</i>
Mpumalanga	<b>R 11.16</b>	<i>R 12.83</i>

- Refer to Figure 4 for a map of the Transmission zones applicable to generators.

## 28. Ancillary service charge for Transmission connected generators and loads

The ancillary service charges are payable by all **generators** and **loads** connected to the **Transmission System** based on the active energy as measured at the **point of supply**, and are given in the table below.

**Table 31: Ancillary service charge for Transmission connected generators and loads**

TUoS ancillary service charge for Transmission connected loads and generators	Ancillary service charge <i>VAT incl</i>	
<b>Generators</b>	<b>0.48</b>	<i>0.55</i>
<b>Loads</b>	<b>0.48</b>	<i>0.55</i>

- The charges applicable to local authorities are the WEPS local authority > 132 kV Transmission ancillary service charge.

## 29. Ancillary service charge for Distribution connection generators and loads

The ancillary service charges are payable by all **loads** and **generators** connected to the **Distribution System** based on the active energy consumed or generated as measured at the **point of supply** and are given in the table below:

**Table 32: Ancillary service charge for Distribution connected generators and loads**

DUoS ancillary service charge Urban <sub>p</sub>	Charge [c/kWh]	
		VAT incl
< 500V	<b>0.55</b>	0.63
≥ 500V & < 66kV	<b>0.54</b>	0.62
≥ 66kV & ≤ 132kV	<b>0.52</b>	0.60

DUoS ancillary service charge Rural <sub>p</sub>	Charge [c/kWh]	
		VAT incl
< 500V	<b>0.55</b>	0.63
≥ 500V & ≤ 22kV	<b>0.55</b>	0.63

- The charges applicable to local authorities are the WEPS local authority ancillary service charges.

## 30. Urban<sub>p</sub> ETUoS network charge for loads

The **TUoS** charges are payable by all **Urban<sub>p</sub>** loads connected to the **Distribution System** based on the **annual utilised capacity** and are given in the table below.

**Table 33: ETUoS network charge for Distribution connected Urban<sub>p</sub> loads**

	Transmission zone	Voltage	[R/kVA]	
				VAT incl
ETUoS urban	≤ 300km	< 500V	<b>R 11.94</b>	R 13.73
		≥ 500V & < 66kV	<b>R 10.91</b>	R 12.55
		≥ 66kV & ≤ 132kV	<b>R 10.62</b>	R 12.21
	> 300km & ≤ 600km	< 500V	<b>R 12.02</b>	R 13.82
		≥ 500V & < 66kV	<b>R 11.01</b>	R 12.66
		≥ 66kV & ≤ 132kV	<b>R 10.70</b>	R 12.31
	> 600km & ≤ 900km	< 500V	<b>R 12.16</b>	R 13.98
		≥ 500V & < 66kV	<b>R 11.11</b>	R 12.78
		≥ 66kV & ≤ 132kV	<b>R 10.77</b>	R 12.39
	> 900km	< 500V	<b>R 12.24</b>	R 14.08
		≥ 500V & < 66kV	<b>R 11.24</b>	R 12.93
		≥ 66kV & ≤ 132kV	<b>R 10.87</b>	R 12.50

- The charges applicable to local authorities are the WEPS local authority Transmission network charges for the above voltages.

## 31. Rural<sub>p</sub> ETUoS network charge for loads

The **ETUoS** charges are payable by all **Rural<sub>p</sub>** loads connected to the **Distribution System** based on the **annual utilised capacity** and are given in the table below.

**Table 34: ETUoS network charge for Distribution connected Rural<sub>p</sub> loads**

	Transmission zone	Voltage	[R/kVA]	
				VAT incl
ETUoS rural	≤ 300km	< 500V	<b>R 24.96</b>	R 28.70
		≥ 500V & < 66kV	<b>R 22.87</b>	R 26.30
	> 300km & ≤ 600km	< 500V	<b>R 25.03</b>	R 28.78
		≥ 500V & < 66kV	<b>R 23.01</b>	R 26.46
	> 600km & ≤ 900km	< 500V	<b>R 25.16</b>	R 28.93
		≥ 500V & < 66kV	<b>R 23.12</b>	R 26.59
	> 900km	< 500V	<b>R 25.27</b>	R 29.06
		≥ 500V & < 66kV	<b>R 23.13</b>	R 26.60

- For the charges applicable to local authorities tariffs, refer to paragraph 33.

### 32. Urban<sub>p</sub> DUoS network charge and Urban<sub>p</sub> low voltage subsidy charge for loads

The **DUoS** network charges are payable by all **Urban<sub>p</sub>** loads connected to the **Distribution System** and are given in the table below.

- The **DUoS network capacity charge** and the **urban low voltage subsidy charge** is payable on based on the **annual utilised capacity**.
- The **DUoS network demand charge** is payable on the **chargeable demand** for Megaflex, Megaflex Gen and Nightsave Urban and on kWh in **peak** and **standard** periods for Miniflex.

**Table 35: Urban<sub>p</sub> DUoS network charge and urban low voltage subsidy charge for Distribution connected loads**

DUoS network charges for urban <sub>p</sub> loads						
Voltage	Network capacity charge [R/kVA/m]		Network demand charge [R/kVA/m]		Urban low voltage subsidy charge [R/kVA/m]	
		VAT incl		VAT incl		VAT incl
< 500V	<b>R 23.73</b>	R 27.29	<b>R 44.99</b>	R 51.74	<b>R 0.00</b>	R 0.00
≥ 500V & < 66kV	<b>R 21.76</b>	R 25.02	<b>R 41.27</b>	R 47.46	<b>R 0.00</b>	R 0.00
≥ 66kV & ≤ 132kV	<b>R 7.77</b>	R 8.94	<b>R 14.39</b>	R 16.55	<b>R 19.17</b>	R 22.05
> 132kV	<b>R 0.00</b>	R 0.00	<b>R 0.00</b>	R 0.00	<b>R 19.17</b>	R 22.05

- The charges applicable to local authorities are the WEPS local authority network capacity, network demand and urban low voltage subsidy charges for the above voltages.

### 33. Rural<sub>p</sub> DUoS network charge for loads

The **DUoS** network charges are payable by all **Rural<sub>p</sub>** loads connected to the **Distribution System** and are given in the table below.

- The **DUoS network capacity charge** is payable on based on the **annual utilised capacity**.
- The **DUoS network demand charge** is payable on the active energy in all time periods.

**Table 36: Rural<sub>p</sub> DUoS network charge for Distribution connected loads**

DUoS network charges rural <sub>p</sub> loads				
Voltage	Network capacity charge [R/kVA/m]		Network demand charge [c/kWh]	
		VAT incl		VAT incl
< 500V	<b>R 24.96</b>	R 28.70	<b>35.53</b>	R 40.86
≥ 500V & ≤ 22kV	<b>R 22.87</b>	R 26.30	<b>31.15</b>	R 35.82

- The charges applicable to local authorities for the Rural<sub>p</sub> **ETUoS** and **DUoS** for loads are the Ruraflex local authority combined **network capacity charges** for the above voltages.

### 34. DUoS network charge for generators

The **DUoS** network charges are payable by all **generators** connected to the **Distribution System** and are given in the table below

- The **DUoS network charge** is payable on based on the **maximum export capacity**.

**Table 37: DUoS network charge for Distribution connected generators**

DUoS network charges for generators	
Voltage	Network capacity charge [R/kW/m]
	VAT incl
< 500V	
≥ 500V & < 66kV	
≥ 66kV & ≤ 132kV	<b>R 19.19</b> R 22.07

### 35. DUoS distribution losses charge for generators

The DUoS generator network charge shall be rebated based on the following formula:

- **distribution losses charge** = energy produced in **peak, standard, and off-peak** periods x WEPS energy rate excluding losses in **peak, standard, and off-peak periods** x (**Distribution loss factor** x **Transmission loss factor** – 1). Refer to Table 1 and Table 2 for the WEPS energy rates excluding losses.
- Refer to **Table 26** and **Table 27** for the **loss factors**.

### 36. DUoS service and administration charges

#### 36.1. DUoS urban<sub>p</sub> service and administration charges

The DUoS and TUoS service and administration charges are payable by all **Urban<sub>p</sub> generators and loads** based on the **monthly utilised capacity** or **monthly maximum exported capacity** and are given in the table below:

**Table 38: Urban<sub>p</sub> Service and administration charges**

DUoS service and administration charges (urban <sub>p</sub> )				
Customer categories utilised capacity / maximum export capacity [kVA or MVA = loads] [kW or MW = generators]	Service charge [R/account/day]		Administration charge [R/POD/day]	
		VAT incl		VAT incl
≤ 100 kVA/kW	<b>R 19.39</b>	R 22.30	<b>R 4.26</b>	R 4.90
> 100 kVA/kW & ≤ 500 kVA/kW	<b>R 88.53</b>	R 101.81	<b>R 24.83</b>	R 28.55
> 500 kVA/kW & ≤ 1 MVA/MW	<b>R 272.39</b>	R 313.25	<b>R 49.30</b>	R 56.70
> 1 MVA/MW	<b>R 272.39</b>	R 313.25	<b>R 122.76</b>	R 141.17
Key customers or Transmission connected	<b>R 5 337.86</b>	R 6 138.54	<b>R 170.47</b>	R 196.04

- The charges applicable to local authorities are the WEPS local authority charges for the above customer categories.

#### 36.2. DUoS rural service and administration charges

The DUoS service and administration charges are payable by all **Rural<sub>p</sub> generators and loads** based on the **monthly utilised capacity** or **monthly maximum exported capacity** and are given in the table below.

**Table 39: Rural<sub>p</sub> service and administration charges**

DUoS service and administration charges (rural <sub>p</sub> )				
Customer categories utilised capacity / maximum export capacity [kVA or MVA = loads] [kW or MW = generators]	Service charge [R/account/day]		Administration charge [R/POD/day]	
		VAT incl		VAT incl
≤ 100 kVA/kW	<b>R 24.55</b>	R 28.23	<b>R 6.97</b>	R 8.02
> 100 kVA/kW & ≤ 500 kVA/kW	<b>R 83.72</b>	R 96.28	<b>R 38.82</b>	R 44.64
> 500 kVA/kW & ≤ 1 MVA/MW	<b>R 257.56</b>	R 296.19	<b>R 59.58</b>	R 68.52
> 1 MVA/MW	<b>R 257.56</b>	R 296.19	<b>R 110.55</b>	R 127.13
Key customers	<b>R 5 047.97</b>	R 5 805.17	<b>R 110.55</b>	R 127.13

- The charges applicable to local authorities are the Ruraflex local authority charges for the above customer categories.

### 36.3. DUoS electrification and rural subsidy charge

The **Electrification and rural subsidy charge** is payable by all **Urban<sub>p</sub>** loads connected to the Eskom **Transmission and Distribution System** for the delivery of energy and is given in the table below.

**Table 40: DUoS electrification and rural subsidy charge**

DUoS electrification and rural network subsidy charge [c/kWh]		
Tariff	Electrification and rural network subsidy charge [c/kWh]	
	<i>VAT incl</i>	
Megaflex, Miniflex, Nightsave Urban Large, Nightsave Urban Small, Businessrate	<b>10.61</b>	<i>12.20</i>

***The charges applicable to local authorities are the WEPS local authority charges for the above tariffs.***

### 37. Excess network capacity charges in the event of an NMD exceedance

The charges below shall apply in the event of an NMD exceedance x the event number

**Table 41: Excess network capacity charges – non local authorities**

#### Excess network capacity charges (NCC) - Non-Local Authority

##### Urban - Excess NCC *Megaflex/Megaflex Gen* *[non local authorities]*

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 35.67	R 41.02
	≥ 500V & < 66kV	R 32.67	R 37.57
	≥ 66kV & ≤ 132kV	R 37.56	R 43.19
	> 132kV*	R 32.60	R 37.49
> 300km and ≤ 600km	< 500V	R 35.75	R 41.11
	≥ 500V & < 66kV	R 32.77	R 37.69
	≥ 66kV & ≤ 132kV	R 37.64	R 43.29
	> 132kV*	R 32.72	R 37.63
> 600km and ≤ 900km	< 500V	R 35.89	R 41.27
	≥ 500V & < 66kV	R 32.87	R 37.80
	≥ 66kV & ≤ 132kV	R 37.71	R 43.37
	> 132kV*	R 32.92	R 37.86
> 900km	< 500V	R 35.97	R 41.37
	≥ 500V & < 66kV	R 33.00	R 37.95
	≥ 66kV & ≤ 132kV	R 37.81	R 43.48
	> 132kV*	R 33.02	R 37.97

\* 132 kV or Transmission connected

##### Urban - Excess NCC *Nightsave Urban Large* *[non local authorities]*

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 35.67	R 41.02
	≥ 500V & < 66kV	R 32.67	R 37.57
	≥ 66kV & ≤ 132kV	R 37.56	R 43.19
	> 132kV*	R 32.60	R 37.49
> 300km and ≤ 600km	< 500V	R 35.75	R 41.11
	≥ 500V & < 66kV	R 32.77	R 37.69
	≥ 66kV & ≤ 132kV	R 37.64	R 43.29
	> 132kV*	R 32.72	R 37.63
> 600km and ≤ 900km	< 500V	R 35.89	R 41.27
	≥ 500V & < 66kV	R 32.87	R 37.80
	≥ 66kV & ≤ 132kV	R 37.71	R 43.37
	> 132kV*	R 32.92	R 37.86
> 900km	< 500V	R 35.97	R 41.37
	≥ 500V & < 66kV	R 33.00	R 37.95
	≥ 66kV & ≤ 132kV	R 37.81	R 43.48
	> 132kV*	R 33.02	R 37.97

\* 132 kV or Transmission connected

##### Urban - Excess NCC *Miniflex* *[non local authorities]*

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 35.62	R 40.96
	≥ 500V & < 66kV	R 32.65	R 37.55
	≥ 66kV & ≤ 132kV	R 37.51	R 43.14
	> 132kV*	R 32.54	R 37.42
> 300km and ≤ 600km	< 500V	R 35.71	R 41.07
	≥ 500V & < 66kV	R 32.75	R 37.66
	≥ 66kV & ≤ 132kV	R 37.58	R 43.22
	> 132kV*	R 32.68	R 37.58
> 600km and ≤ 900km	< 500V	R 35.88	R 41.26
	≥ 500V & < 66kV	R 32.85	R 37.78
	≥ 66kV & ≤ 132kV	R 37.69	R 43.34
	> 132kV*	R 32.87	R 37.80
> 900km	< 500V	R 35.91	R 41.30
	≥ 500V & < 66kV	R 32.96	R 37.90
	≥ 66kV & ≤ 132kV	R 37.76	R 43.42
	> 132kV*	R 32.97	R 37.92

\* 132 kV or Transmission connected

##### Urban - Excess NCC *Nightsave Urban Small* *[non local authorities]*

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 35.67	R 41.02
	≥ 500V & < 66kV	R 32.67	R 37.57
	≥ 66kV & ≤ 132kV	R 37.56	R 43.19
	> 132kV*	R 32.60	R 37.49
> 300km and ≤ 600km	< 500V	R 35.75	R 41.11
	≥ 500V & < 66kV	R 32.77	R 37.69
	≥ 66kV & ≤ 132kV	R 37.64	R 43.29
	> 132kV*	R 32.72	R 37.63
> 600km and ≤ 900km	< 500V	R 35.89	R 41.27
	≥ 500V & < 66kV	R 32.87	R 37.80
	≥ 66kV & ≤ 132kV	R 37.71	R 43.37
	> 132kV*	R 32.92	R 37.86
> 900km	< 500V	R 35.97	R 41.37
	≥ 500V & < 66kV	R 33.00	R 37.95
	≥ 66kV & ≤ 132kV	R 37.81	R 43.48
	> 132kV*	R 33.02	R 37.97

\* 132 kV or Transmission connected

##### Rural - Excess NCC *Nightsave Rural* *[non local authorities]*

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 17.86	R 20.54
	≥ 500V & ≤ 22kV	R 16.41	R 18.87
> 300km and ≤ 600km	< 500V	R 17.89	R 20.57
	≥ 500V & ≤ 22kV	R 16.47	R 18.94
> 600km and ≤ 900km	< 500V	R 18.06	R 20.77
	≥ 500V & ≤ 22kV	R 16.58	R 19.07
> 900km	< 500V	R 18.11	R 20.83
	≥ 500V & ≤ 22kV	R 16.61	R 19.10

##### Rural - Excess NCC *Ruraflex/Ruraflex Gen* *[non local authorities]*

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 24.96	R 28.70
	≥ 500V & ≤ 22kV	R 22.87	R 26.30
> 300km and ≤ 600km	< 500V	R 25.03	R 28.78
	≥ 500V & ≤ 22kV	R 23.01	R 26.46
> 600km and ≤ 900km	< 500V	R 25.16	R 28.93
	≥ 500V & ≤ 22kV	R 23.12	R 26.59
> 900km	< 500V	R 25.27	R 29.06
	≥ 500V & ≤ 22kV	R 23.13	R 26.60

**Table 42: Excess network capacity charges – Local authorities**

**Excess network capacity charges (NCC) Local Authority**

**Urban - Excess NCC**  
*Megaflex*  
[Local authorities]

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 36.47	R 41.94
	≥ 500V & < 66kV	R 33.37	R 38.38
	≥ 66kV & ≤ 132kV	R 38.27	R 44.01
	> 132kV*	R 33.19	R 38.17
> 300km and ≤ 600km	< 500V	R 36.52	R 42.00
	≥ 500V & < 66kV	R 33.50	R 38.53
	≥ 66kV & ≤ 132kV	R 38.36	R 44.11
	> 132kV*	R 33.32	R 38.32
> 600km and ≤ 900km	< 500V	R 36.68	R 42.18
	≥ 500V & < 66kV	R 33.57	R 38.61
	≥ 66kV & ≤ 132kV	R 38.44	R 44.21
	> 132kV*	R 33.51	R 38.54
> 900km	< 500V	R 36.74	R 42.25
	≥ 500V & < 66kV	R 33.70	R 38.76
	≥ 66kV & ≤ 132kV	R 38.53	R 44.31
	> 132kV*	R 33.60	R 38.64

\* 132 kV or Transmission connected

**Urban - Excess NCC**  
*Nightsave Urban Large*  
[Local authorities]

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 36.47	R 41.94
	≥ 500V & < 66kV	R 33.37	R 38.38
	≥ 66kV & ≤ 132kV	R 38.27	R 44.01
	> 132kV*	R 33.19	R 38.17
> 300km and ≤ 600km	< 500V	R 36.52	R 42.00
	≥ 500V & < 66kV	R 33.50	R 38.53
	≥ 66kV & ≤ 132kV	R 38.36	R 44.11
	> 132kV*	R 33.32	R 38.32
> 600km and ≤ 900km	< 500V	R 36.68	R 42.18
	≥ 500V & < 66kV	R 33.57	R 38.61
	≥ 66kV & ≤ 132kV	R 38.44	R 44.21
	> 132kV*	R 33.51	R 38.54
> 900km	< 500V	R 36.74	R 42.25
	≥ 500V & < 66kV	R 33.70	R 38.76
	≥ 66kV & ≤ 132kV	R 38.53	R 44.31
	> 132kV*	R 33.60	R 38.64

\* 132 kV or Transmission connected

**Urban - Excess NCC**  
*Miniflex*  
[Local authorities]

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 36.45	R 41.92
	≥ 500V & < 66kV	R 33.38	R 38.39
	≥ 66kV & ≤ 132kV	R 38.25	R 43.99
	> 132kV*	R 33.19	R 38.17
> 300km and ≤ 600km	< 500V	R 36.52	R 42.00
	≥ 500V & < 66kV	R 33.51	R 38.54
	≥ 66kV & ≤ 132kV	R 38.35	R 44.10
	> 132kV*	R 33.32	R 38.32
> 600km and ≤ 900km	< 500V	R 36.71	R 42.22
	≥ 500V & < 66kV	R 33.60	R 38.64
	≥ 66kV & ≤ 132kV	R 38.44	R 44.21
	> 132kV*	R 33.51	R 38.54
> 900km	< 500V	R 36.73	R 42.24
	≥ 500V & < 66kV	R 33.74	R 38.80
	≥ 66kV & ≤ 132kV	R 38.50	R 44.28
	> 132kV*	R 33.60	R 38.64

\* 132 kV or Transmission connected

**Urban - Excess NCC**  
*Nightsave Urban Small*  
[Local authorities]

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 36.47	R 41.94
	≥ 500V & < 66kV	R 33.37	R 38.38
	≥ 66kV & ≤ 132kV	R 38.27	R 44.01
	> 132kV*	R 33.19	R 38.17
> 300km and ≤ 600km	< 500V	R 36.52	R 42.00
	≥ 500V & < 66kV	R 33.50	R 38.53
	≥ 66kV & ≤ 132kV	R 38.36	R 44.11
	> 132kV*	R 33.32	R 38.32
> 600km and ≤ 900km	< 500V	R 36.68	R 42.18
	≥ 500V & < 66kV	R 33.57	R 38.61
	≥ 66kV & ≤ 132kV	R 38.44	R 44.21
	> 132kV*	R 33.51	R 38.54
> 900km	< 500V	R 36.74	R 42.25
	≥ 500V & < 66kV	R 33.70	R 38.76
	≥ 66kV & ≤ 132kV	R 38.53	R 44.31
	> 132kV*	R 33.60	R 38.64

\* 132 kV or Transmission connected

**Rural - Excess NCC**  
*Nightsave Rural*  
[Local authorities]

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 18.45	R 21.22
	≥ 500V & ≤ 22kV	R 16.94	R 19.48
> 300km and ≤ 600km	< 500V	R 18.48	R 21.25
	≥ 500V & ≤ 22kV	R 17.01	R 19.56
> 600km and ≤ 900km	< 500V	R 18.66	R 21.46
	≥ 500V & ≤ 22kV	R 17.12	R 19.69
> 900km	< 500V	R 18.69	R 21.49
	≥ 500V & ≤ 22kV	R 17.13	R 19.70

**Rural - Excess NCC**  
*Ruraflex*  
[Local authorities]

Transmission zone	Voltage	Excess NCC[R/kVA/m]	
		VAT incl	
≤ 300km	< 500V	R 25.74	R 29.60
	≥ 500V & ≤ 22kV	R 23.62	R 27.16
> 300km and ≤ 600km	< 500V	R 25.85	R 29.73
	≥ 500V & ≤ 22kV	R 23.75	R 27.31
> 600km and ≤ 900km	< 500V	R 25.99	R 29.89
	≥ 500V & ≤ 22kV	R 23.87	R 27.45
> 900km	< 500V	R 26.07	R 29.98
	≥ 500V & ≤ 22kV	R 23.88	R 27.46

## TARIFFS APPLICABLE FOR GENERATOR USE-OF-SYSTEM CHARGES

### 38. Gen-DUoS urban

A use of system tariff for Urban<sub>p</sub> Distribution connected generator customers with the following charges:

1. the R/kW/month **Distribution network capacity charge** (generators) based on the voltage of the supply and the **maximum export capacity** measured at the **POD** applicable during all time periods; less
2. a **distribution losses charge** based on **loss factors**, which shall rebate the **network capacity charge**, but not beyond extinction,
3. a c/kWh **ancillary service charge** applied on the total active energy produced in the month based on the voltage of the supply applicable during all time periods ;
4. a R/account/day **service charge** based on the **monthly maximum exported capacity** of all points of supply/points of delivery linked to an account;
5. a R/day **administration charge** based on the **monthly maximum exported capacity** of each **POD/point of supply/service agreement** linked to an account; and
6. additional charges in the event of an **MEC** exceedance in accordance with the **NMD and MEC rules**.

The structure is given in the table below:

**Table 43: Gen DUoS Urban structure**

Charge	Rate
DUoS network capacity charge	<b>Table 37: DUoS network charge for Distribution connected generators (Energy in each TOU period x WEPS rate excluding losses in each TOU period x (Distribution loss factor x Transmission loss factor (for loads) - 1), not beyond extinction</b>
Losses charge	<b>Refer to WEPS energy rate excluding losses in paragraph 11, Paragraph 35 and paragraphs 25.1 and 25.2</b>
Ancillary service charge	<b>Table 32: Ancillary service charge for Distribution connected generators and loads (Urban)</b>
Service charge	<b>Table 38: Urban<sub>p</sub> Service and administration charges</b>
Administration charge	<b>Table 38: Urban<sub>p</sub> Service and administration charges</b>

### 39. Gen-DUoS rural

A use of system tariff for Rural<sub>p</sub> Distribution connected generator customers with the following charges:

1. a c/kWh **ancillary service charge** applied on the total active energy produced in the month based on the voltage of the supply applicable during all time periods;
2. a R/account/day **service charge** based on the **monthly maximum exported capacity** of all points of supply/points of delivery linked to an account;
3. a R/day **administration charge** based on the **monthly maximum exported capacity** of each **POD/point of supply/service agreement** linked to an account; and
4. additional charges in the event of an **MEC** exceedance in accordance with the **NMD and MEC rules**.

The structure is given in the table below:

**Table 44: Gen DUoS rural structure**

Charge	Rate
DUoS network capacity charge	<b>NA</b>
Losses charge	<b>NA</b>
Ancillary service charge	<b>Table 32: Ancillary service charge for Distribution connected generators and loads (Rural)</b>
Service charge	<b>Table 39: Rural<sub>p</sub> service and administration charges</b>
Administration charge	<b>Table 39: Rural<sub>p</sub> service and administration charges</b>

## 40. Gen-TUoS

A use of system tariff for Transmission connected generator customers with the following charges:

1. the R/kW/month **Transmission network charge** (generators) based on the voltage of the supply and the **maximum export capacity** measured at the **POD** applicable during all time periods; less
2. a **Transmission losses charge** based on **loss factors (may be positive or negative)**;
3. a c/kWh **ancillary service charge** applied on the total active energy produced in the month based on the voltage of the supply applicable during all time periods ;
4. a R/account/day **service charge** based on the **monthly maximum exported capacity** of all points of supply/points of delivery linked to an account;
5. a R/day **administration charge** based on the **monthly maximum exported capacity** of each **POD/point of supply/service agreement** linked to an account; and
6. additional charges in the event of an **MEC** exceedance in accordance with the **NMD and MEC rules**.

The structure is given in the table below:

**Table 45: Gen TUoS structure**

Charge	Rate
TUoS network charge	<b>Table 30: TUoS network charge for Transmission connected generators (Energy in each TOU period x WEPS rate excluding losses in each TOU period) x (Transmission loss factor-1)/Transmission loss factor for generators</b>
Losses charge	<b>Refer to WEPS energy rate excluding losses in paragraph 11, paragraph 25.2 and paragraph 25.4</b>
Ancillary service charge	<b>Table 31: Ancillary service charge for Transmission connected generators and loads</b>
Service charge	<b>Table 38: Urbanp Service and administration charges</b>
Administration charge	<b>Table 38: Urbanp Service and administration charges</b>

# TARIFFS APPLICABLE FOR THE RECONCILIATION OF ACCOUNTS FOR ESKOM CUSTOMERS RECEIVING ENERGY FROM NON-ESKOM GENERATORS

## 41. Gen-wheeling tariff

A reconciliation electricity tariff for local and non-local electricity customers connected at >1kV on Urban<sub>p</sub> or Rural<sub>p</sub> networks on the Megaflex, Megaflex Gen, Miniflex, Ruraflex or Ruraflex Gen TOU electricity tariffs that have entered into a wheeling transaction with a generator

1. A credit raised on the total wheeled energy and seasonally and time-of-use differentiated c/kWh **active energy charges** excluding losses and based on whether the main account is a local authority or non-local authority account;
2. three time-of-use periods namely **peak, standard and off-peak**, as specified in paragraph 3.2;
3. the treatment of **public holidays** for the raising of the credit active energy charge shall be as specified in paragraph 10;
4. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each Gen-wheeling **service agreement** linked to an account; and
5. a credit raised on the total wheeled energy and the c/kWh **affordability subsidy charge** (applicable to non-local authority tariffs only.)

Below is the summary of the charges:

**Table 46: Gen-wheeling tariff structure**

Tariff name	Type of charge	Rate
<b>Gen-wheeling non Munic urban</b>	Energy charge (credit)	<b>Table 1: WEPS non-local authority tariff - energy rates excluding losses</b>
	Affordability subsidy charge (credit)	<b>Table 1: WEPS non-local authority tariff - affordability subsidy charge</b>
	Administration charge	<b>Table 1: WEPS non-local authority tariff - administration charge</b>
	All other tariff charges	<b>NA</b>
<b>Gen-wheeling non Munic rural</b>	Energy charge (credit)	<b>Table 1: WEPS non-local authority tariff - energy rates excluding losses</b>
	Administration charge	<b>Table 21: Ruraflex non-local authority tariff - administration charge</b>
	All other tariff charges	<b>NA</b>
<b>Gen-wheeling Munic urban</b>	Energy charge (credit)	<b>Table 2: WEPS local authority tariff - energy rates excluding losses</b>
	Administration charge	<b>Table 2: WEPS local authority tariff - administration charge</b>
	All other tariff charges	<b>NA</b>
<b>Gen-wheeling Munic rural</b>	Energy charge (credit)	<b>Table 2: WEPS local authority tariff - energy rates excluding losses</b>
	Administration charge	<b>Table 22: Ruraflex local authority tariff -administration charge</b>
	All other tariff charges	<b>NA</b>

## 42. Gen-offset tariff

A reconciliation electricity tariff for non-local authority electricity customers connected to Urban<sub>p</sub> or Rural<sub>p</sub> networks on the Megaflex, Megaflex Gen, Miniflex, Ruraflex or Ruraflex Gen TOU tariffs where there is a net-metering/offset transaction:

1. A credit raised on the total active energy exported and seasonally and time-of-use differentiated **active energy charges** including losses based on the voltage of supply and the **Transmission zone**;
2. three time-of-use periods namely **peak, standard and off-peak**, as specified in paragraph 3.2;
3. the treatment of **public holidays** for the raising of the credit active energy charge shall be as specified in paragraph 10;
4. a credit raised on **total active energy** exported and the **ancillary service charge**, based on the voltage of the supply;
5. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each Gen-offset **service agreement** linked to an account; and
6. a credit raised on the **total active energy** exported and the **affordability subsidy charge** (applicable to non-local authority tariffs only.)

Below is the summary of the charges:

**Table 47: Gen-offset tariff structure**

Tariff name	Type of charge	Rate
<b>Gen-offset urban</b>	Energy charge (credit)	<b>Table 1: WEPS non-local authority tariff - energy rates per Transmission Zone and voltage inclusive of losses</b>
	Ancillary service charge (credit)	<b>Table 1: WEPS non-local authority tariff - ancillary service charge</b>
	Affordability subsidy charge (credit)	<b>Table 1: WEPS non-local authority tariff - affordability subsidy charge</b>
	Administration charge	<b>Table 1: WEPS non-local authority tariff - administration charge</b>
	All other tariff charges	<b>NA</b>
<b>Gen-offset rural</b>	Energy charge (credit)	<b>Table 21: Ruraflex non-local authority tariff - energy rates per Transmission Zone and voltage</b>
	Ancillary service charge (credit)	<b>Table 21: Ruraflex non-local authority tariff -ancillary service charge</b>
	Administration charge	<b>Table 21: Ruraflex non-local authority tariff -administration charge</b>
	All other tariff charges	<b>NA</b>

### 43. Gen-purchase tariff

**A reconciliation electricity tariff for local and non-local electricity customers connected to Urban<sub>p</sub> or Rural<sub>p</sub> networks on the Megaflex, Megaflex Gen, Miniflex, Ruraflex or Ruraflex Gen TOU tariffs where Eskom purchases energy from a non-Eskom generator but the energy is consumed by the customer**

1. seasonally and time-of-use differentiated c/kWh **active energy charges** excluding losses based on the active energy purchased by Eskom, but consumed by the customer and whether the main account is a local authority or non-local authority account;
2. three time-of-use periods namely **peak, standard and off-peak**, as specified in paragraph 3.2;
3. the treatment of **public holidays** for the raising of the credit active energy charge shall be as specified in paragraph 10;
4. a R/POD/day **administration charge** based on the **monthly utilised capacity** of each Gen-purchase **service agreement** linked to an account; and
5. a c/kWh **affordability subsidy charge** applied to the total active energy purchased by Eskom, but consumed by the customer (applicable to non-local authority tariffs only).

Below is the summary of the charges:

**Table 48: Gen-purchase tariff structure**

Tariff name	Type of charge	Rate
<b>Gen-purchase-urban</b>	Energy charge	<b>Table 1: WEPS non-local authority tariff - energy rates excluding losses</b>
	Affordability subsidy charge	<b>Table 1: WEPS non-local authority tariff - affordability subsidy charge</b>
	Administration charge	<b>Table 1: WEPS non-local authority tariff - administration charge</b>
	All other tariff charges	<b>NA</b>
<b>Gen-purchase-rural</b>	Energy charge	<b>Table 1: WEPS non-local authority tariff - energy rates excluding losses</b>
	Administration charge	<b>Table 21: Ruraflex non-local authority tariff -administration charge</b>
	All other tariff charges	<b>NA</b>
<b>Gen-purchase Munic urban</b>	Energy charge	<b>Table 2: WEPS local authority tariff- energy rates -excluding losses</b>
	Administration charge	<b>Table 2: WEPS local authority tariff - administration charge</b>
	All other tariff charges	<b>NA</b>
<b>Gen-purchase Munic rural</b>	Energy charge	<b>Table 2: WEPS local authority tariff- energy rates excluding losses</b>
	Administration charge	<b>Table 22: Ruraflex local authority tariff - administration charge</b>
	All other tariff charges	<b>NA</b>

Oo