

Basic Assessment for Proposed Eskom Battery Storage System at Skaapvlei Substation, Skaapvlei, West Coast, Western Cape

Appendix E – Environmental Management Programme and Maintenance Management Plan

Report Prepared for

Eskom Holdings SOC Limited

SRK Project Number 533767/01



Report Prepared by

The logo for srk consulting, featuring a stylized orange and grey graphic to the left of the text "srk consulting".

August 2019

Basic Assessment for Proposed Eskom Battery Storage System at Skaapvlei Substation, Skaapvlei, West Coast, Western Cape

Environmental Management Programme and Maintenance Management Plan

Eskom Holdings SOC Limited

SRK Consulting (South Africa) (Pty) Ltd
The Administrative Building
Albion Spring
183 Main Rd
Rondebosch 7700
Cape Town
South Africa

e-mail: ahill@srk.co.za
website: www.srk.co.za

Tel: +27 (0) 21 659 3060
Fax: +27 (0) 86 530 7003

SRK Project Number 533767/01

August 2019

Compiled by:

Amy Hill
Environmental Consultant

Email: ahill@srk.co.za

Authors:

Jessica du Toit, Scott Masson, Amy Hill

Peer Reviewed by:

Scott Masson
Senior Environmental Consultant

Profile and Expertise of EAPs

SRK Consulting (South Africa) (Pty) Ltd (SRK) has been appointed by Eskom Holdings SOC Limited (Eskom) as the independent consultants to undertake the Basic Assessment (BA) process required in terms of the National Environmental Management Act 107 of 1998 (NEMA).

SRK Consulting was established in 1974 and comprises over 1 300 professional staff worldwide, offering wide-ranging expertise in the natural resources and environmental sectors. SRK's Cape Town environmental department has a proven track record of managing large, complex environmental and engineering projects in the Western Cape, Africa and internationally. SRK has rigorous quality assurance standards and is ISO 9001 certified.

As required by NEMA, the qualifications and experience of the key individual practitioners responsible for this project are detailed below.

Project Director: Christopher Dalglish, BBusSc (Hons), MPhil (EnvSci)

Certified with the Interim Board for Environmental Assessment Practitioners South Africa (CEAPSA)

Chris Dalglish is a Partner at SRK Consulting and the Head of the Environmental Department in Cape Town. He has over 26 years of experience as an environmental consultant working on a broad range of Environmental Impact Assessment (EIA), auditing, environmental planning and management, public consultation and environmental management system projects. Chris's experience includes managing and co-ordinating major EIAs throughout Southern Africa and South America in the mining, energy, land-use planning and development, water and waste management, and industrial sectors.

Project Manager: Amy Hill, BSc (Hons)

Amy Hill is an Environmental Consultant at SRK Consulting and has 4 years of experience in the biodiversity and ecology sector. She is experienced in managing a number of BA and Water Use Authorisation processes and has contributed to numerous EIA processes, notably in the commercial and industrial sectors. Amy has drafted Environmental Management Plans (EMPRs), performed Environmental Control Officer duties and coordinated stakeholder engagement processes. She holds a BSc (Hons) in Biodiversity and Ecology from the University of Stellenbosch.

Statement of SRK Independence

Neither SRK nor any of the authors of this Report have any material present or contingent interest in the outcome of this Report, nor do they have any pecuniary or other interest that could be reasonably regarded as being capable of affecting their independence or that of SRK.

SRK has no beneficial interest in the outcome of the assessment which is capable of affecting its independence.

Disclaimer

The opinions expressed in this report have been based on the information supplied to SRK by Eskom. SRK has exercised all due care in reviewing the supplied information, but conclusions from the review are reliant on the accuracy and completeness of the supplied data. SRK does not accept responsibility for any errors or omissions in the supplied information and does not accept any consequential liability arising from commercial decisions or actions resulting from them. Opinions presented in this report apply to the site conditions and features as they existed at the time of SRK's investigations, and those reasonably foreseeable. These opinions do not necessarily apply to conditions and features that may arise after the date of this Report, about which SRK had no prior knowledge nor had the opportunity to evaluate.

Table of Contents

1	Introduction	1
1.1	Background	1
1.2	Content of the EMPr and MMP	2
1.3	Project Description	3
1.4	Site Description	4
1.5	Potential Impacts.....	4
2	Measures Applicable to the Design Phase.....	2
2.1	Roles and Responsibilities	2
2.2	Environmental Management Measures	2
3	Measures Applicable to the Construction Phase	6
3.1	Roles and Responsibilities	6
3.2	Compliance and Monitoring	9
3.2.1	Method Statements	9
3.2.2	Environmental Records and Reports	10
3.2.3	Corrective Action	12
3.3	Environmental Management Measures	12
4	Measures Application to the Operation / Maintenance Phase.....	26
4.1	Maintenance Management Plan	26
4.1.1	Roles and Responsibilities	26
4.1.2	Compliance and Monitoring: Maintenance Activities	27
4.1.3	Environmental Management Measures	27

List of Tables

Table 1-1:	Content of the EMPr as prescribed by the EIA Regulations, 2014.....	2
Table 1-2:	Content of an MMP	3
Table 1-3:	Potential impacts of the proposed project.....	4
Table 2-1:	Environmental management and mitigation measures that must be implemented during the Design Phase.....	3
Table 3-1:	Reports required during Construction	10
Table 3-2:	Environmental management and mitigation measures that must be implemented during the Construction Phase.....	13
Table 4-1:	Environmental management and mitigation measures that must be implemented during the Operational / Maintenance Phase.....	28

List of Figures

Figure 1-1:	Locality map	1
Figure 1-2:	Skaapvlei Substation and proposed site.....	1
Figure 3-1:	Construction Phase Reporting Structure	6

List of Appendices

Appendix A: Method Statement Pro Forma

Appendix B: Stormwater Management Plan

Acronyms and Abbreviations

BA	Basic Assessment
BBBEE	Broad-Based Black Economic Empowerment
CBA	Critical Biodiversity Area
CR	Contractor's Environmental Representative
DEA	Department of Environmental Affairs
EA	Environmental Authorisation
EAP	Environmental Assessment Practitioner
ECO	Environmental Control Officer
EIA	Environmental Impact Assessment
EMPr	Environmental Management Programme
Eskom	Eskom Holdings SOC Limited,
GN	Government Notice
HWC	Heritage Western Cape
MSDS	Material Safety Data Sheets
NEMA	National Environmental Management Act 107 of 1998
NCR	Non-conformance
PM	Project Manager
SRK	SRK Consulting (South Africa) (Pty) Ltd
SWMP	Stormwater Management Plan

Glossary

Activity	An activity or operation carried out as part of the construction or operation of the power plant
Aspect	An action, event, product or service, occurring as a component or result of an activity, which interacts with the existing environment (or which results in impacts to it)
Broad-Based Black Economic Empowerment (BBBEE)	BBBEE is a racially selective programme launched by the South African government to redress the inequalities of Apartheid by giving certain previously disadvantaged groups of South African citizens economic privileges.
Community	Those people who may be impacted upon by the construction and operation of the project. This includes neighbouring landowners, local communities and other occasional users of the area.
Contractor	Any company appointed by the Proponent to undertake construction or related activities on site, and will include the main Contractor, as well as any Sub-Contractors.
Construction Phase	The stage of project development comprising site preparation as well as all construction activities associated with the development.
Contaminated water	Water contaminated by activities on site, e.g. concrete water and run-off from plant / personnel wash areas.
Design Phase	The stage during which detailed layout and development plans are prepared, including the drafting of contract documents for construction.
Environment	The external circumstances, conditions and influences that surround and affect the existence and development of an individual, organism or group. These circumstances include biophysical, social, economic, historical and cultural aspects.
Environmental Authorisation	The authorisation by a competent authority of a listed activity or specified activity in terms of NEMA.
Environmental Impact Assessment	A process of evaluating the environmental and socio-economic consequences of a proposed course of action or project
Environmental Management Measures	Requirements or specifications for environmental management, as presented in the EMPr, some of which are based on the mitigation measures identified in the EIA Report (in this case the BA Report).
Hazardous substance	A substance (including materials and waste) that can have a deleterious (harmful) effect on the environment and those substances declared hazardous substances in terms of the Hazardous Substances Act 15 of 1973.
Impact	A change to the existing environment, either adverse or beneficial, that is directly or indirectly due to the development of the project and its associated activities.
Method Statement	A mandatory written submission by the Contractor to the RE setting out the plant, materials, labour and method the Contractor proposes using to carry out an activity.
Mitigation Measures	Actions identified in the BA Report to manage (avoid, minimise or optimise) potential environmental impacts which may result from the development.

Operational Phase	The stage of the works (including maintenance) following the Construction Phase, during which the development will function or be used as anticipated in the Environmental Authorisation.
Performance indicator	A measurable indicator of the outcome of environmental management, used to assess the success with which mitigation measures have been implemented. Often captures the results of several different monitoring activities.
Phase	A defined period during the life of the project, e.g. the Construction and Operations Phases.
Proponent	The person or organisation taking ownership of the project.
Resources	The personnel, financial, equipment and technical requirements necessary for the successful completion of mitigation measures and for monitoring activities.
Schedule	The schedule or deadline for completion of each mitigation measure, which are recorded to ensure that mitigation measures are implemented in good time and in the correct sequence.
Solid waste	All solid waste including construction debris, chemical waste, broken / redundant equipment, oil filters, wrapping materials, timber, tins and cans, drums, wire, nails, food and domestic waste (e.g. plastic packets and wrappers).
Sub-Contractors	A Sub-Contractor is any individual or Contractor appointed by the main Contractor, to undertake a specific task on site.

1 Introduction

1.1 Background

Eskom Holdings SOC Limited (Eskom) proposes to install Battery Energy Storage Systems (BESSs) at various (existing) distribution substations throughout South Africa to:

Strengthen the electricity distribution network and address current voltage and capacity constraints;

Integrate a greater amount of renewable energy [in this case Sere Wind Energy Facility (WEF)] into the electricity grid; and

Reduce the requirement for investment in new conventional generation capacity (i.e. gas, nuclear, coal) and new distribution substations and powerlines to strengthen networks.

The BESS project will strengthen the electricity distribution network from Sere WEF to the West Coast area, and make the generated electricity dispatchable.

SRK Consulting (South Africa) (Pty) Ltd (SRK) has been appointed by Eskom to undertake the Basic Assessment (BA) processes for the proposed BESSs at the Paleisheuvel Substation and the Skaapvlei Substation along the West Coast in the Western Cape.

The National Environmental Management Act 107 of 1998 (NEMA) requires that an Environmental Management Programme (EMPr) be submitted along with the BA Report to demonstrate how environmental management and mitigation measures will be implemented. The BA Report contains a detailed description of the project and its impacts. In addition to this requirement, Eskom may trigger the following activity listed in NEMA during ongoing maintenance of the BESS and access roads:

1. *Listing Notice 1, Activity 27: the clearance of an area of 1 ha or more, but less than 20 ha of indigenous vegetation.*

Eskom can undertake this activity during maintenance without the need for Environmental Authorisation (EA) if conducted in terms of an approved Maintenance and Management Programme (MMP). This document is intended to meet the requirements of an MMP and, through its approval, authorises Eskom to conduct ongoing maintenance in terms of the maintenance specifications in this document without the need for EA.

The mitigation measures apply to the following phases of the development process:

- **The Design Phase:** These measures relate to the detailed layout, planning and design of the BESS and associated infrastructure, and will largely be implemented by the planning and development team, prior to the commencement of any physical on-site activities. These mitigation measures are presented in Section 0.
- **The Construction Phase:** These mitigation measures are applicable during site preparation and construction on the site of the proposed project and must be implemented by the relevant contractors and sub-contractors. These mitigation measures are presented in Section 3.
- **The Operational Phase (the MMP):** These mitigation measures are applicable during the long-term operation and maintenance of the BESS and must be implemented by Eskom or approved service providers. These mitigation measures are presented in Section 4 **Error! Reference source not found.**

As it is expected that the BESSs will be maintained in the long-term and not be decommissioned in the foreseeable future, measures related to decommissioning and post-closure rehabilitation are not included in the EMPr.

The management measures listed for the various phases are either:

- Essential: best practice measures which must be implemented and are non-negotiable; or
- Best Practice: recommended to comply with best practice, with adoption dependent on the proponent's risk profile and commitment to adhere to best practice, and which must be shown to have been considered and sound reasons provided by the proponent if not implemented. These measures have been italicized for ease of reference.

Note: *The EMPr will be submitted to DEA for approval along with the final BA Report. Once Environmental Authorisation (EA) has been issued by DEA, this document may need to be updated to ensure that all relevant conditions of authorisation are adequately captured.*

1.2 Content of the EMPr and MMP

The Environmental Impact Assessment (EIA) Regulations, 2014, promulgated in terms of NEMA (Government Notice (GN) R 982, as amended by GN R326) prescribe the required content in an EMPr. These requirements and the sections of this EMPr in which they are addressed, are summarised in Table 1-1.

Table 1-1: Content of the EMPr as prescribed by the EIA Regulations, 2014¹

GN 982 Annexure 1 (1) Ref.:	Item	Section Ref.:
(a) (i)	Details of the person who prepared the EMPr	Page i
(a) (ii)	Expertise of that person to prepare an EMPr	Page i
(b)	A detailed description of the aspects of the activity that are covered by the EMPr as identified by the project description;	1.3
(c)	A map at an appropriate scale which superimposes the proposed activity, its associated structures, and infrastructure on the environmental sensitivities of the preferred site, indicating any areas that should be avoided, including buffers;	Figure 1-1
(d)	A description of the impact management outcomes, including management statements, identifying the impacts and risks that need to be avoided, managed and mitigated as identified through the environmental impact assessment process for all phases of the development including-	Table 1-3
(d)(i)	Planning and design;	
(d)(ii)	Pre-construction activities;	
(d)(iii)	Construction activities	
(d)(iv)	Rehabilitation of the environment after construction and where applicable post closure; and	
(d)(v)	Where relevant, operation activities;	
(f)	A description of proposed impact management actions, identifying the manner in which the impact management outcomes contemplated in paragraphs (d) will be achieved, and must, where applicable, include actions to-	Table 2-1, Table 3-2, and Table 4-1
(f)(i)	Avoid, modify, remedy, control or stop any action, activity or process which causes pollution or environmental degradation;	
f(ii)	Comply with any prescribed environmental management standards or practices;	
f(iii)	Comply with any applicable provisions of the Act regarding closure, where applicable; and	
f(iv)	Comply with any provisions of the Act regarding financial provisions for rehabilitation, where applicable;	

¹ As this draft EMPr is only intended for tender purposes and is not for authority approval, not all requirements of the EMPr have been included.

GN 982 Annexure 1 (1) Ref.:	Item	Section Ref.:
(g)	The method of monitoring the implementation of the impact management actions contemplated in paragraph (f);	3.2
(h)	The frequency of monitoring the implementation of the impact management actions contemplated in paragraph (f);	3.2.2
(i)	An indication of the persons who will be responsible for the implementation of the impact management actions;	Table 2-1, Table 3-2, Table 4-1
(j)	The time periods within which the impact management actions contemplated in paragraph (f) must be implemented;	Table 2-1, Table 3-2, and Table 4-1
(k)	The mechanism for monitoring compliance with the impact management actions contemplated in paragraph (f)	3.2
(l)	A program for reporting on compliance, taking into account the requirements as prescribed by the Regulations;	3.2.2
(m)	An environmental awareness plan describing the manner in which-	Table 3-2, and Table 4-1
(m)(i)	The applicant intends to inform his or her employees of any environmental risk which may result from their work; and	
(m)(ii)	Risks must be dealt with in order to avoid pollution or the degradation of the environment; and	
(n)	Any specific information that may be required by the competent authority.	N/A

As well as the requirements of an EMPr specified in the EIA Regulations, 2014, the local Department of Environmental Affairs and Development Planning (DEA&DP) has specified the required content of an MMP. These requirements and the sections of this EMPr in which they are addressed, are summarised in Table 1-2.

Table 1-2: Content of an MMP

Item	Section Ref.:
Personal details of the applicant	1.1
Project description/introduction	1.4
Relevant legislation	1.1
Description of the site	1.4
Description of maintenance activities	4
Roles and responsibilities during maintenance	4.1.1
Environmental monitoring or auditing during maintenance	Table 4-1

1.3 Project Description

Eskom proposes installing BESSs at existing distribution substations throughout South Africa to:

- Strengthen the electricity distribution network and address current voltage and capacity constraints;
- Integrate a greater amount of renewable energy into the electricity grid; and
- Reduce the requirement for investment in new conventional generation capacity (i.e. wind, solar, gas, nuclear, coal).

Eskom initially identified a total of 24 substation sites in the Western Cape where the BESS could be implemented with a total (proposed) BESS capacity of 148.5 Megawatts (MW). Eskom identified the

Skaapvlei Substation as an ideal site to implement the BESS primarily because of its location within the Sere Wind Energy Facility (WEF) and the connection into the national grid.

The subject of this EMP is the proposed installation of the BESS at the Skaapvlei Substation (“the project”). Separate EMPs have been compiled for the proposed BESSs at the other substations.

1.4 Site Description

The Skaapvlei Substation is located within the Sere WEF, owned and operated by Eskom (see Figure 1-1). Access to the Sere WEF is via the Skaapvlei Road (DR2225), approximately 2.5 km north-east of the Substation (see Figure 1-2). The Substation is opposite the Sere WEF administration and workshop block.

Besides the Sere WEF consisting of 46 turbines, mining and extensive agriculture are the primary land uses in the study area. Tourism is of increasing significance in the region. Land cover within the study area is mostly natural because of limited urban development and the relative low impact of mining and agriculture. Low-intensity small stock farming is the primary agricultural activity in the study area although intensive (irrigated) crop farming occurs along the Olifants River.

The study area is sparsely populated with less than 10 people per km² mostly concentrated within the small towns and villages of the area (Savannah, 2008). Koekenaap is a rural village located ~ 17 km east of Skaapvlei Substation. Strandfontein, ~ 28 km south of Skaapvlei Substation is a holiday destination and therefore has a low residential density. Papendorp (~ 22 km), Ebenhaeser (~ 17 km) and Olifantsdrift (~ 17 km) are small isolated settlements located on the banks of the Olifants River.

Isolated farmsteads are scattered throughout the surrounding area. An extensive network of sandy/gravel farm roads connect the various farms. On some of the farms, tracts of land have been cleared of natural vegetation and planted with crops (strip cultivation). There is a higher concentration of farms (smallholdings) along the Olifants River which is the only reliable source of water in the region.

1.5 Potential Impacts

A summary of the potential impacts of the proposed development identified and assessed in the BAR is presented in Table 1-3. Additional details on the nature of these impacts are provided in the BAR (SRK Consulting Report No: 533767/1, August 2019).

Table 1-3: Potential impacts of the proposed project

Impact	Description	Impact Status
Construction Phase		
Botanical	Loss of Vegetation and Plant SCC	Negative
	Loss of Ecological Connectivity	Negative
Socio- economic	Increased Employment, Income and Skills Development	Positive
Human health	Impaired Human Health from Increased Ambient Pollutant Concentrations	Negative
Visual	Altered sense of place and visual intrusion	Negative
	Altered Sense of Place from Increased Traffic during Construction	Negative
Traffic	Increased Nuisance on Existing Road Users and Surrounding Residents	Negative
	Compromised Road Surface Integrity of the Regional Road Network	Negative
Operation Phase		
Groundwater	Deterioration of Groundwater Quality from Accidental (non-routine) Electrolyte spills	Negative
Botanical	Loss of Vegetation and Plant SCC	Negative

Impact	Description	Impact Status
Human health	Human fatalities / injuries caused by battery fires / explosions	Negative
Visual	Altered sense of place and visual intrusion	Negative

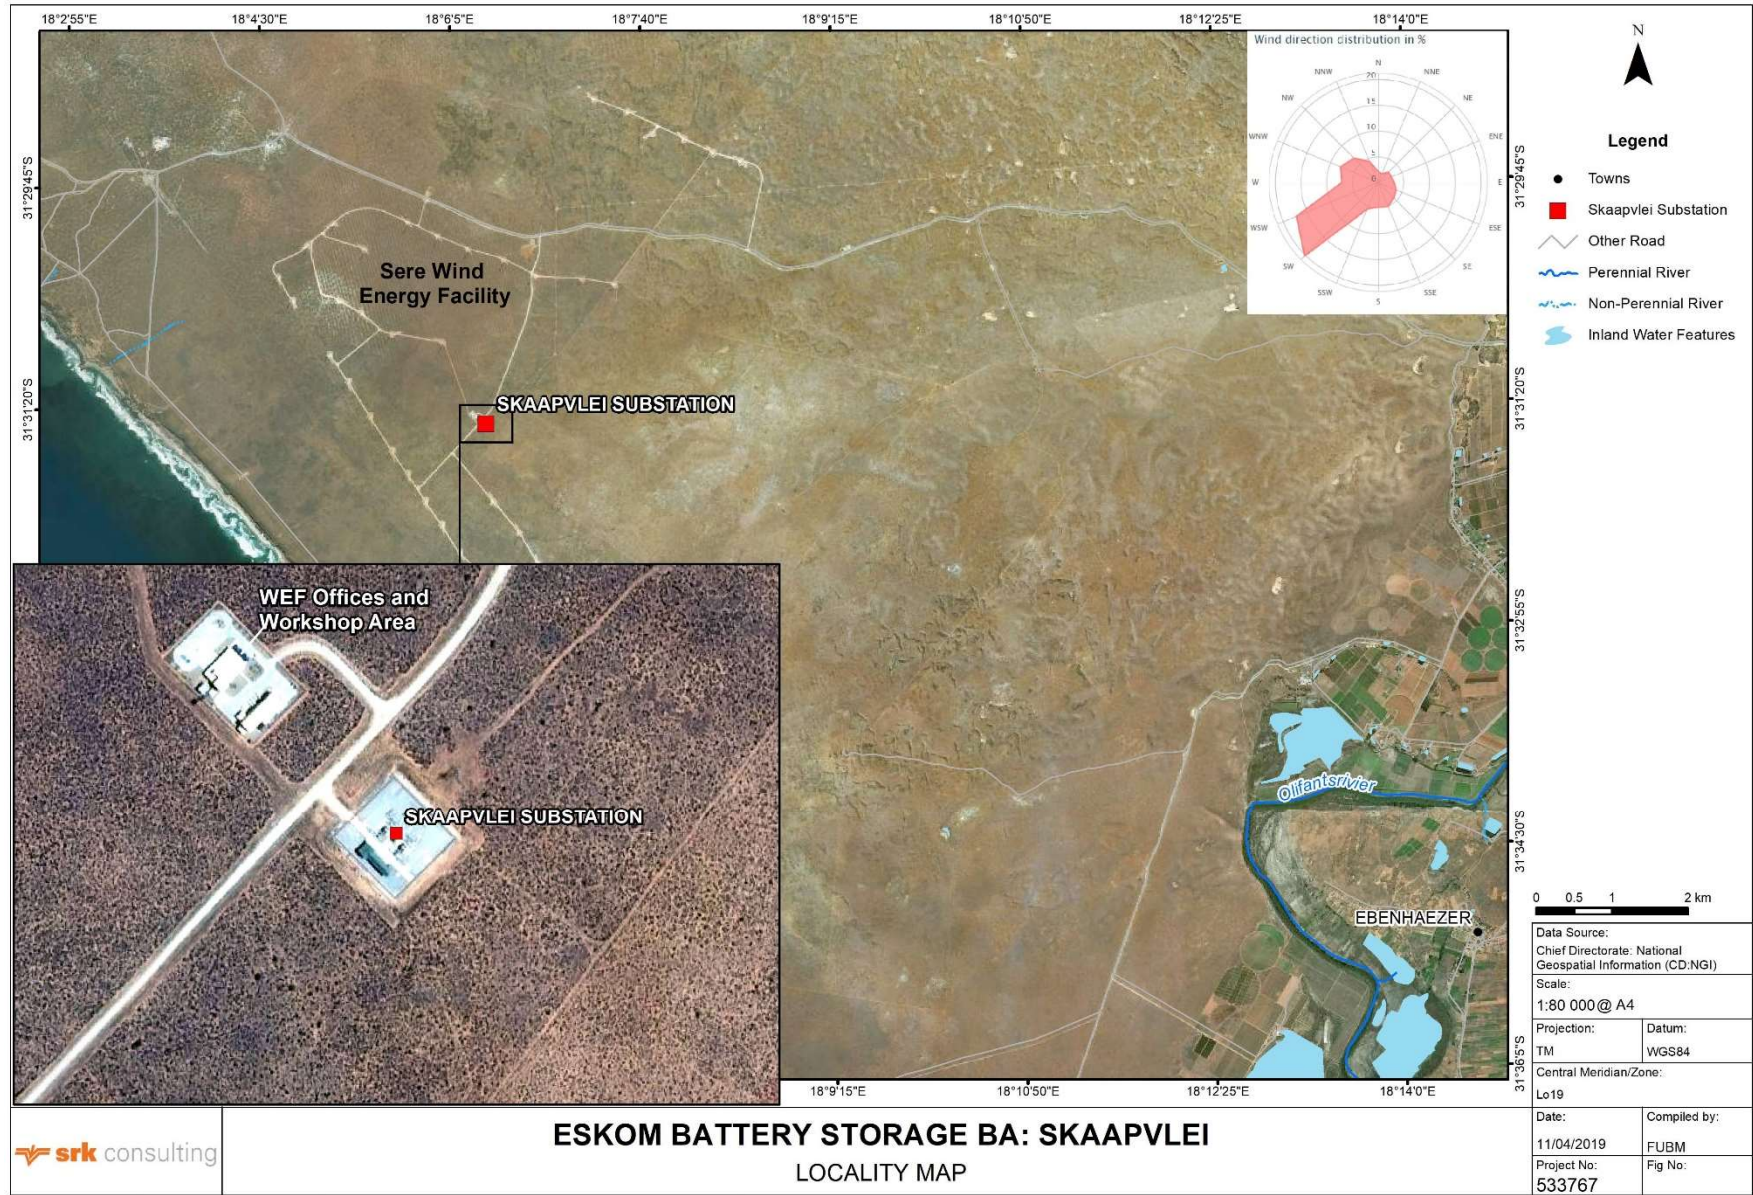


Figure 1-1: Locality map



View of the access road to the east of the Skaapvlei Substation



The Skaapvlei Substation as seen from the site



View of the site (foreground) and the Skaapvlei Substation (background)



View of the Skaapvlei Substation from the access road looking west

	SKAAPVLEI BATTERY STORAGE Skaapvlei Substation	Project No. 533767
--	--	--------------------------

Figure 1-2: Skaapvlei Substation and proposed site

2 Measures Applicable to the Design Phase

2.1 Roles and Responsibilities

The key role players during the Design Phase of the project are:

- Eskom (the proponent); and
- Engineers responsible for the design of the BESS.

Their roles and responsibilities during the detailed Design Phase with respect to the implementation of the EMPr are outlined below.

Eskom:

- Ensure that the engineering/design team is aware of and takes into consideration all relevant measures in the EMPr; and
- Confirm that all relevant environmental management measures in the EMPr have been incorporated into the project design on completion of the Design Phase.

Engineers:

- Take cognisance of all relevant measures in the EMPr and ensure integration thereof in the detailed design; and
- Reference the environmental management measures applicable to the Construction (Section 3) and Operational (Section 4) Phases of the project in all documents that will be applicable to future phases of the project (e.g. tender documents).

2.2 Environmental Management Measures

The environmental management and mitigation measures that must be implemented during the Design Phase, as well as responsibilities and timelines for the implementation of these measures and monitoring thereof, are laid out in Table 2-1 below.

Table 2-1: Environmental management and mitigation measures that must be implemented during the Design and Pre-Construction Phase

Design Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ²	Performance Indicators
Authorisations	1.	Ensure that all required licences and permits have been obtained before the start of construction.	<ul style="list-style-type: none"> Eskom 	<ul style="list-style-type: none"> Before construction commences 	<ul style="list-style-type: none"> Keep record of all permits, licences and authorisations 	<ul style="list-style-type: none"> Required licences/permits on file
Environmental compliance	2.	Appoint a suitably qualified Environmental Control Officer (ECO) to oversee construction activities.	<ul style="list-style-type: none"> Eskom 	<ul style="list-style-type: none"> Before construction commences 	<ul style="list-style-type: none"> Review appointment documentation 	<ul style="list-style-type: none"> ECO appointment documents
	3.	Include the EMPr in all tender documents to ensure that sufficient resources are allocated to environmental management by the Contractor.	<ul style="list-style-type: none"> Eskom and Engineering consultants 	<ul style="list-style-type: none"> Prior to call for tenders 	<ul style="list-style-type: none"> Eskom to check tender documents and contract 	<ul style="list-style-type: none"> Incorporated in tender documents
	4.	Plan and make adequate financial provision for rehabilitation and restoration activities and clearly allocate timing and responsibility for environmental rehabilitation.				
	5.	Include the EMPr in all tender documents to ensure that sufficient resources are allocated to environmental management by the Contractor.				
Water supply	6.	Obtain approval from local municipality / water user association for supply of water required during construction.	<ul style="list-style-type: none"> Eskom 	<ul style="list-style-type: none"> Prior to construction 	<ul style="list-style-type: none"> Request for approval from local municipality / water use association 	<ul style="list-style-type: none"> Approval for water use
Employment	7.	Set targets for the use of local labour based on the needs of the proponent and the availability of existing skills and people that are willing to undergo training.	<ul style="list-style-type: none"> Eskom 	<ul style="list-style-type: none"> Call for tenders 	<ul style="list-style-type: none"> Eskom to check tender documents and contract Keep record of how targets were determined Keep record of staff by origin Keep record of training provided 	<ul style="list-style-type: none"> Incorporated in tender documents Percentage of local staff Percentage of Previously Disadvantaged Individual (PDI) staff Number of incidents Time activities stopped Number of recurring incidents
	8.	Ensure that Contractors from outside the local area that tender for work meet the required targets for how many locals are given employment.				
	9.	Consider implementing labour-intensive rather than capital-intensive work methods wherever possible.				
	10.	Consider purchasing resources from local sources wherever possible.				
BESS design	11.	Design the batteries so that all electrolytes and active materials are encapsulated by protective covering where practical.	<ul style="list-style-type: none"> Eskom and Engineering consultants 	<ul style="list-style-type: none"> During design phase 	<ul style="list-style-type: none"> Review design documentation 	<ul style="list-style-type: none"> BESS design
	12.	Design BESS to have monitoring systems to detect leaks or emissions.				

² Unless otherwise indicated, monitoring will be undertaken by Eskom, supported by the authorities where the requirement is specifically stipulated in a licence or permit.

Design Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ²	Performance Indicators
	13.	Consider an aqueous electrolyte which significantly reduces the hazards associated with organics and acids.				
	14.	Specific to Technology Alternative 3: Add complexing agents to electrolyte to reduce potential for air borne release of toxic bromine.				
	15.	Specific to Layout Alternative 1: Paint the battery storage containers (and where possible, associated infrastructure such as fencing) grey or brown. Avoid the use of light colours (e.g. white).				
	16.	Do not increase the height of existing buildings, unless specifically required for operations.				
	17.	Be sensitive towards the use of glass or material with a high reflectivity which may cause glare and increase visual impacts.				
BESS safety	18.	Be mindful of supplier recommendations when deciding on placement (especially in relation to existing high voltage infrastructure at the substation) and stacking of battery storage containers.	<ul style="list-style-type: none"> Eskom and Engineering consultants 	<ul style="list-style-type: none"> During design phase 	<ul style="list-style-type: none"> Review design documentation 	<ul style="list-style-type: none"> Placement of battery storage
Waste management	19.	Develop a waste management plan, laying out: <ul style="list-style-type: none"> Expected type and amount of waste; Measures to reduce waste; Type and expected volume of recyclable waste; Recycling facilities that will collect / receive waste; Type of storage for different waste types; Waste contractors that will collect waste; 	<ul style="list-style-type: none"> Eskom Consultant team 	<ul style="list-style-type: none"> During design phase 	<ul style="list-style-type: none"> Review of design documents 	<ul style="list-style-type: none"> Adequate provision for waste disposal
Stormwater management	20.	Ensure designs comply with the recommendations of the Stormwater Management Plan (SWMP) (see Appendix B)	<ul style="list-style-type: none"> Engineering consultants 	<ul style="list-style-type: none"> During design phase 	<ul style="list-style-type: none"> Review detailed layout plans 	<ul style="list-style-type: none"> Approval of final design Recommendations of SWMP included in final design
	21.	Ensure that stormwater originating from upgradient (stormwater that could flow across the site from external areas) is diverted around the site.				
	22.	Design the drainage systems (of stormwater infrastructure, trenches, drains and outlets) to encourage dissipation of water, decreasing velocity of water and prevent erosion, ponding and flooding of the site and surrounding environment.				
	23.	The design of secondary containment measures are compulsory. Consider tertiary containment measures due to the hazardous nature of the battery electrolytes.				

Design Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ²	Performance Indicators
	24.	Install erosion berms within disturbed areas to prevent gully formation. Roads only: Install berms every 50m where the road has a slope of less than 2%, every 25m where the road slopes between 2% and 10%, every 20m where the road slopes between 10% and 15% and every 10m where the road slope is greater than 15%.				
Floral management	25.	Appoint a suitably qualified specialist to oversee search and rescue of floral species. Obtain necessary approval and permits from CapeNature.	<ul style="list-style-type: none"> Eskom Consultant team 	<ul style="list-style-type: none"> Prior to the start of vegetation clearance 	<ul style="list-style-type: none"> Appointment of vegetation specialist Search and Rescue Report 	<ul style="list-style-type: none"> Permit on file Floral species relocated
	26.	Rescue and relocate all identified Species of Conservation Concern as per the Botanical Report to areas adjacent to construction footprint areas, preferably in Autumn, once the rains have fallen.				
	27.	Appoint a botanist / rehabilitation specialist to compile a rehabilitation plan and oversee the rehabilitation process.				
Dust management	28.	Compile a Dust Management Plan.	<ul style="list-style-type: none"> Eskom Consultant team 	<ul style="list-style-type: none"> Prior to the start of vegetation clearance 	<ul style="list-style-type: none"> Dust Management Plan 	<ul style="list-style-type: none"> Dust Management Plan available
Fire management	29.	Ensure that areas designed for the storage of fuel and other flammable materials comply with standard fire safety regulations.	<ul style="list-style-type: none"> Engineering consultants 	<ul style="list-style-type: none"> During design phase 	<ul style="list-style-type: none"> Review detailed layout plans 	<ul style="list-style-type: none"> Compliance with measures
Visual impacts	30.	Specific to Layout Alternative 1: Paint the battery storage containers (and where possible, associated infrastructure such as fencing) grey or brown. Avoid the use of light colours (e.g. white).	<ul style="list-style-type: none"> Engineering consultants 	<ul style="list-style-type: none"> During design phase 	<ul style="list-style-type: none"> Review detailed layout plans 	<ul style="list-style-type: none"> Compliance with measures
	31.	Do not increase the height of existing buildings, unless specifically required for operations.				
	32.	Be sensitive towards the use of glass or material with a high reflectivity which may cause glare and increase visual impacts.				
Traffic management	33.	Engage the road authorities to determine the optimal route to the site for construction vehicles and battery delivery vehicles.	<ul style="list-style-type: none"> Eskom Consultant team 	<ul style="list-style-type: none"> Prior to construction 	<ul style="list-style-type: none"> Correspondence with road authorities 	<ul style="list-style-type: none"> Proof of correspondence with road authorities Permission to transport battery storage containers
	34.	Obtain all required approvals for transporting battery storage containers to site (e.g. approval for abnormal load).				

3 Measures Applicable to the Construction Phase

3.1 Roles and Responsibilities

The key role players during the Construction Phase of the project are anticipated as follows:

- Eskom (the proponent);
- Resident Engineer (RE), who will oversee the activities of the contractors on site;
- Contractor(s) responsible for the construction of the battery storage project;
- Any sub-contractors hired by Contractors; and
- ECO.

The anticipated Construction Phase organogram is presented in Figure 3-1 below and shows the proposed lines of communication during this phase. All instructions relating to the EMPr will be given to the Contractor via the ECO or RE. The Contractor will report issues of concern to the RE and ECO, who in turn will engage the proponent. The ECO will report to the RE and Eskom.

Eskom will retain responsibility for ensuring that the Contractor fully implements the provisions of the EMPr.

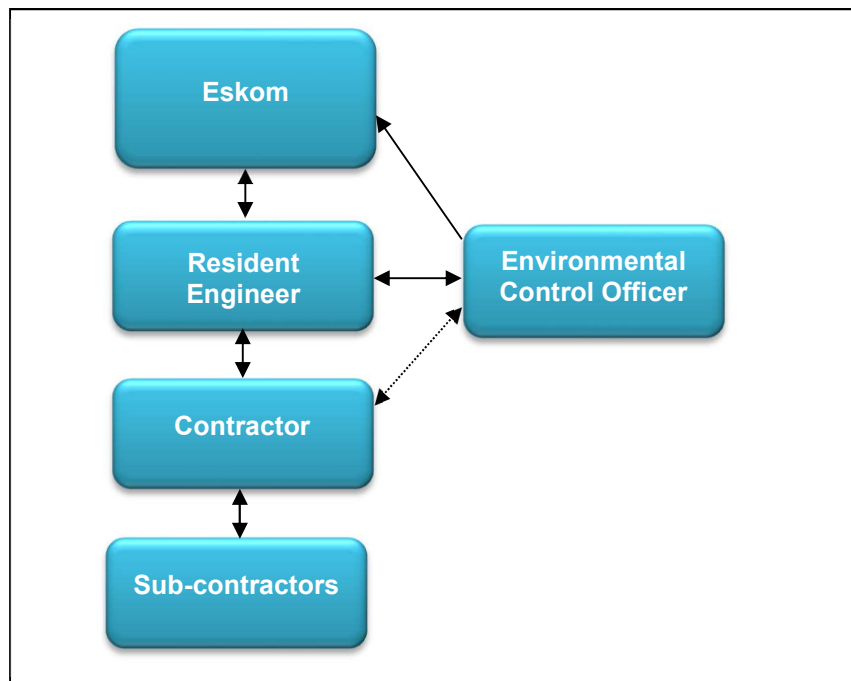


Figure 3-1: Construction Phase Reporting Structure

Key roles and responsibilities during the Construction Phase with respect to the implementation of the EMPr are outlined below.

Eskom as the Developer:

Eskom has overall responsibility for management of the project. In terms of environmental management, the proponent will:

- Appoint a suitably experienced Engineer/s and Environmental Practitioner/s who will be responsible for the overall management of activities on site during the Construction Phase;
- Appoint a suitably qualified ECO to monitor compliance with the EMPr and other environmental permits for the duration of the Construction Phase;
- Ensure that the engineers are aware of the requirements of the EMPr, implement the EMPr and monitor the Contractor's activities on site;
- Ensure that Contractors are aware of and contractually bound to the provisions of this EMPr by including the relevant environmental management requirements in the tender and contract documents, as appropriate;
- Ensure that Contractors remedy non-compliance with the EMPr or unforeseen environmental damage timeously and to the satisfaction of the ECO and authorities (when necessary); and
- Notify the authorities should non-compliance with the EMPr or unforeseen environmental damage not be remedied timeously.

Resident Engineer:

Eskom will appoint suitably qualified Engineers, who in turn will designate a suitable RE or technician/s who will be responsible for overseeing activities of the Contractor during the Construction Phase. The RE shall:

- Ensure that the Contractor is duly informed of the EMPr and associated responsibilities and implications of this EMPr prior to commencement of construction;
- Monitor the Contractor's activities (together with the ECO) with regard to the requirements outlined in the EMPr;
- Relay all instructions from the ECO to the Contractor and ensure that these are fully understood and implemented;
- Report any environmental emergencies/concerns to the ECO immediately;
- Act as a point of contact for local residents and community members; and
- Ensure that non-compliance is remedied timeously and to the satisfaction of the relevant authorities.

Contractors:

Contractors will each be required to appoint or designate a Contractor's Environmental Representative (CR) who will assume responsibility for the Contractor's environmental management requirements on site and be the point of contact between the Contractor and the ECO. Each CR shall:

- Ensure that all activities on site are undertaken in accordance with the EMPr;
- Monitor the Contractor's activities (together with the ECO) with regard to the requirements outlined in the EMPr;
- Ensure that all employees and sub-contractors comply with the EMPr;
- Immediately notify the ECO of any non-compliance with the EMPr, or any other issues of environmental concern; and
- Ensure that non-compliance is remedied timeously and to the satisfaction of the ECO.

Contractors have a duty to demonstrate respect and care for the environment. Contractors will be responsible for the cost of rehabilitation of any environmental damage that may result from non-compliance with the EMPr, environmental regulations and relevant legislation.

Sub-contractors:

All Sub-contractors will be required to:

- Ensure that all employees are duly informed of the EMPr and associated responsibilities and implications of this EMPr prior to commencement of construction;
- Ensure that all activities on site are undertaken in accordance with the EMPr;
- Monitor employees' activities (together with the ECO) with regard to the requirements outlined in the EMPr;
- Immediately notify the ECO of any non-compliance with the EMPr, or any other issues of environmental concern; and
- Ensure that non-compliance is remedied timeously and to the satisfaction of the ECO.

Each Sub-contractor has a duty to demonstrate respect and care for the environment. Sub-contractors will be responsible for the cost of rehabilitation of any environmental damage that may result from non-compliance with the EMPr, environmental regulations and relevant legislation, resulting from their presence on site.

Environmental Control Officer:

The ECO shall be a suitably qualified/experienced environmental professional or professional firm, appointed by the proponent, for the duration of the Construction Phase of the project. The ECO shall:

- Request Method Statements from Contractors prior to the start of relevant construction activities, where required, and approve these (as appropriate) without causing undue delay;
- Monitor, review and verify compliance with the EMPr, Environmental Authorisation (EA) and any other environmental permit/ approval, by Contractors as well as any sub-contractors and specialist contractors;
- Undertake site inspections at least twice a month to determine compliance with the EMPr, EA, and any other environmental permit/ approval;
- Identify areas of non-compliance and recommend corrective actions (measures) to rectify them in consultation with Eskom, the RE and the applicable Contractor, as required;
- Compile a checklist highlighting areas of non-compliance following each ECO inspection;
- Ensure follow-up and resolution of all non-compliances;
- Provide feedback for continual improvement in environmental performance;
- Respond to changes in project implementation or unanticipated site activities which are not addressed in the EMPr, and which could potentially have environmental impacts, and advise Eskom, the RE and Contractor as required; and
- Undertake a site closure inspection, which may result in recommendations for additional clean-up and rehabilitation measures.

3.2 Compliance and Monitoring

3.2.1 Method Statements

A Method Statement is a document setting out specific details regarding the plant, materials, labour and method the Contractor proposes using to carry out certain activities, usually activities that may have a detrimental effect on the environment. It is submitted by the Contractor to the RE and ECO for approval.

The purpose of a Method Statement is for the Contractor to provide additional details regarding the proposed methodology for certain activities, and for the RE and ECO to confirm that these meet the requirements of the EMPr and acceptable environmental practice. This allows the EMPr to be less prescriptive and affords the Contractor a certain amount of flexibility or to amend stipulations in the EMPr, if approved by the RE/ECO. It also provides a reference point to detect deviations from the agreed approach to an activity.

Each Method Statement will address environmental management aspects relevant to the activity and will typically provide detailed descriptions of items including, but not necessarily limited to:

- Nature, timing and location of activities;
- Procedural requirements and steps;

- Management responsibilities;
- Material and equipment requirements;
- Transportation of equipment to and from site;
- Method for moving equipment/material while on site;
- How and where material will be stored;
- Emergency response approaches, particularly related to spill containment and clean-up;
- Response to compliance/non-conformance with the requirements of the EMP; and
- Any other information deemed necessary by the RE/ECO.

The following list provides examples of Method Statements that may be requested from the Contractor:

- Construction site establishment;
- Environmental awareness training including the date, time and location of the course/s, the course content and provision for refresher courses;
- Material and equipment (including battery) storage and delivery;
- Dust control;
- Fuel storage, dispensing and fuel spills;
- Waste management;
- Management of contaminated water;
- Stormwater management;
- Operating heavy machinery;
- Cement batching;
- Transporting battery storage containers to site; and
- Any others requested by the RE/ECO.

The Method Statements will be submitted by the Contractor to the RE and ECO no less than **14 days** prior to the intended date of commencement of an activity (or as otherwise agreed with the RE/ECO). The RE/ECO shall approve / reject the Method Statement within **2 days**. An activity for which a Method Statement has been requested shall not commence until the RE/ECO has approved of such method and once approved, the Contractor shall abide by the relevant Method Statement. A pro forma Method Statement is attached in Appendix A, although a suitable Method Statement format can be agreed between the RE/ECO and Contractor.

3.2.2 Environmental Records and Reports

Environmental records and reports required during the Construction Phase are listed in Table 3-1.

Table 3-1: Reports required during Construction

Report	Frequency	From	To
Environmental Checklist	Weekly	CR	ECO and Eskom
Environmental Compliance Report	Twice a month / following each inspection	ECO	RE and Eskom
Environmental Incident Report	Within 24 hours of incident occurrence	CR	ECO and Eskom
Site Closure Report	End of Contract	ECO	RE and Eskom

Report	Frequency	From	To
Statutory Environmental Audit Report 1	Within six months of commencement of the Construction Phase or as specified in the EA	Independent environmental auditor	DEA
Statutory Environmental Audit Report 2	Within one month after completion of the Construction Phase or as specified in the EA	Independent environmental auditor	DEA
Other Statutory Environmental Audit Reports (S34 and Appendix 7 of EIA Regs)	As specified in the EA for the period during which the environmental authorisation and EMPr, remain valid.	Independent environmental auditor	DEA

3.2.2.1 Environmental Checklist

The CR will undertake weekly site inspections to check on the implementation of the EMPr, EA, and any other environmental permit/approval, by the Contractor and complete a brief report/checklist after the inspection. The completed checklists shall be submitted to Eskom and the ECO at the end of each inspection. This checklist should be discussed between the CR and the ECO during the initial site inspection, and agreement reached on the preferred format and content.

3.2.2.2 Environmental Compliance Report

The ECO will prepare an Environmental Compliance Report following each site inspection, detailing any environmental issues, compliances, non-compliance and corrective actions to be implemented. These reports will be based on the ECO's observations and the weekly Environmental Checklists undertaken by the CR as per 3.2.2.1. Environmental Compliance Reports will be submitted to the RE and Eskom and a full record will be kept by the ECO, for submission to the Local Authority and/or DEA on request.

When more frequent site visits are undertaken by the ECO, the frequency of progress reports will increase accordingly to allow for timeous reporting of environmental issues and actions required.

3.2.2.3 Photographic Records

If the ECO identifies any areas of concern, the ECO will request photographic records, which must be submitted by the Contractor for evidential purposes. The ECO shall also keep photographic records of all construction activities and areas of concern during site inspections.

3.2.2.4 Construction Site Closure Report

The ECO will undertake a final site closure inspection on completion of the Construction Phase. The purpose of this is to confirm compliance with all site closure requirements identified by the ECO, and that the site has been left in an environmentally suitable condition. If outstanding environmental requirements are observed during this inspection, a further inspection must be carried out to confirm compliance. The Site Closure Report will be submitted to the RE and Eskom for evidential purposes, and to DEA if requested.

3.2.2.5 Statutory Environmental Audit Reports

In terms of Regulation 34 of the NEMA EIA Regulations, 2014, Eskom is required to appoint an independent person with environmental auditing expertise to undertake an environmental audit to determine compliance with the conditions of the EA and the EMPr and recommend improvements (if required). In terms of Regulation 34(2)(d) of the EIA Regulations, 2014, the Environmental Audit Reports must be conducted and submitted at intervals confirmed by DEA in the EA.

SRK recommends that the first Environmental Audit Report be submitted to DEA within six months of the commencement of the Construction Phase and a second within one month of completion of the Construction Phase. A final Environmental Audit Report will be required during the Operational Phase (see Section 4).

The Environmental Audit Report must contain all the information required in Appendix 7 of the NEMA EIA Regulations, 2014.

3.2.3 Corrective Action

Corrective action is a critical component of the implementation–review–corrective action–implementation cycle and it is through corrective action that continuous improvement can be achieved. Where repeated non-compliance is recorded, procedures may need to be altered accordingly to avoid the need for repeated corrective action.

If environmental compliance monitoring by the CR, Eskom or ECO indicates non-conformance with the EMP or approved Method Statements, the RE or Eskom will formally notify the Contractor through the Eskom Non-conformance process (NCR) and/ or notification of Defect process detailed in the Contract. The Corrective Action Request documents:

- The nature of the non-conformance/environmental damage;
- The actions or outcomes required to correct the situation; and
- The date by which each corrective or preventive action must be completed.

Upon receipt of the NCR, the Contractor will be required to produce a Corrective Action Plan (or similar plan), which will detail how the required actions will be implemented. The Corrective Action Plan must be submitted to the NCR initiator and ECO for approval prior to implementation. Once it has been approved, the corrective action must be carried out within the time limits stipulated in the NCR. Additional monitoring by the CR and ECO will then be required to confirm the success or failure of the corrective action.

3.3 Environmental Management Measures

The environmental management and mitigation measures that must be implemented during the Construction Phase, as well as responsibilities and timelines for the implementation of these measures and monitoring thereof, are laid out in Table 3-2.

Table 3-2: Environmental management and mitigation measures that must be implemented during the Construction Phase

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
Site camp	1.	Submit a method statement for Site Camp establishment for acceptance by Eskom and the ECO at least two weeks prior to the start of construction activities.	<ul style="list-style-type: none"> Contractor 	<ul style="list-style-type: none"> Start of construction 	<ul style="list-style-type: none"> Visual inspections Method statement 	<ul style="list-style-type: none"> Accepted method statement Site boundaries demarcated Signage in place
	2.	Establish a suitably fenced Site Camp at the start of the contract, which will allow for site offices, vehicle, equipment, material and waste storage areas to be consolidated as much as possible. Locate the Site Camp at a position accepted by Eskom and the ECO. Provide water and / or washing facilities at the Site Camp for personnel.				
	3.	Demarcate construction site boundaries upon establishment. Control security and access to the site. Fence off site boundaries to the satisfaction of the ECO and ensure that plant, labour and materials remain within site boundaries.				
	4.	Designate the area beyond the boundary of the site as "No go" areas for all personnel on site. No vehicles, machinery, materials or people shall be permitted in the "No go" area at any time without the express permission of the ECO.				
Safety and Security	5.	Ensure that emergency procedures (in relation to fire, spills, contamination of the ground, accidents to employees, use of hazardous substances, battery handling, etc.) are established prior to commencing construction. Submit these emergency procedures to Eskom and the ECO for approval.	<ul style="list-style-type: none"> All Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual inspection and approval by CR, RE and ECO. 	<ul style="list-style-type: none"> Number of safety/emergency incidents.
	6.	Make all emergency procedures available, including responsible personnel, contact details of emergency services, etc. to all the relevant personnel. Clearly demarcate emergency procedures at the relevant locations around the site.				
	7.	Provide suitable emergency and safety signage on site, and demarcate any areas which may pose a safety risk (including hazardous substances, deep excavations etc.).				
	8.	Advise the ECO of any emergencies on site, together with a record of action taken				

³ Unless otherwise indicated, monitoring will be undertaken by the ECO, supported by the authorities where the requirement is specifically stipulated in a licence or permit.

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
	9.	Secure the Site Camp, particularly to restrict unauthorised access to fuels and any other hazardous substances.				
	10.	Store all construction material and equipment in locked containers within the Site Camp. Employ 24 hour security for the Site Camp.				
	35.	Liaise with the local fire-fighting department with regards to emergency procedures.				
Employment	11.	Set targets for the use of local labour based on the availability of existing skills and people that are willing to undergo training.	<ul style="list-style-type: none"> • Eskom • Contractors 	<ul style="list-style-type: none"> • Prior to construction 	<ul style="list-style-type: none"> • Keep record of how targets were determined • Keep record of staff by origin • Keep record of training provided 	<ul style="list-style-type: none"> • Percentage of local staff • Percentage of PDI staff
	12.	Maximise opportunities for the training of unskilled and skilled workers from local communities and use local Sub-Contractors where possible.				
	13.	Meet empowerment targets as per contractual requirements.				
	14.	Consider implementing labour-intensive rather than capital-intensive work methods wherever possible.				
	15.	Consider purchasing resources from local sources wherever possible.				
	16.	Develop and implement a fair and transparent labour and recruitment policy.				
	17.	Ensure gender equality in recruitment, as far as possible.				
Environmental Awareness Training	18.	Provide environmental awareness training to all personnel on site at the start of their employment. Training should include discussion of: <ul style="list-style-type: none"> • Potential impact of construction waste and activities on the environment; • Suitable disposal of construction waste and litter; • Key measures in the EMPr relevant to worker's activities; • How incidents and suggestions for improvement can be reported; and • Ensure that all attendees remain for the duration of the training and on completion sign an attendance register that clearly indicates participants' names. 	<ul style="list-style-type: none"> • All Contractors 	<ul style="list-style-type: none"> • Before workers start working on-site • Before additional activities are undertaken • When new staff start work on site 	<ul style="list-style-type: none"> • Check training attendance register • Observe whether activities are executed in line with EMPr requirements 	<ul style="list-style-type: none"> • Proportion of workers that completed environmental training • Compliance of workers with EMPr
	19.	Include environmental mitigation measures relevant to current activities in daily toolbox talks.				

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
Complaints Register / Grievance Mechanism	20.	Maintain and disclose a complaints register. The register must record: <ul style="list-style-type: none"> • Complainant name and contact details; • Date complaint was lodged; • Person who recorded the complaint; • Nature of the complaint; • Actions taken to investigate the complaint and outcome of the investigation; • Action taken to remedy the situation; and • Date on which feedback was provided to complainant. 	<ul style="list-style-type: none"> • Eskom • Contractor 	<ul style="list-style-type: none"> • Duration of construction activities 	<ul style="list-style-type: none"> • Keep record of all complaints 	<ul style="list-style-type: none"> • Register on site • Complaints followed up and closed out
	21.	Respond rapidly to complaints and take appropriate corrective action.				
Hazardous materials	22.	Design and construct hazardous material storage facilities, especially fuel storage, with suitable impermeable materials and a minimum bund containment capacity equal to 110% of the largest container.	<ul style="list-style-type: none"> • All contractors 	<ul style="list-style-type: none"> • Throughout construction 	<ul style="list-style-type: none"> • Visual inspection of hazardous materials handling and storage areas 	<ul style="list-style-type: none"> • Number of incidents of non-compliance with safety procedures concerning hazardous materials, including waste materials. • Number of spills of hazardous materials, including waste materials; • Cost of cleaning up spills. • Evidence of contamination and leaks.
	23.	Ensure that contaminants (including cement) are not placed directly on the ground (e.g. mix cement on plastic sheeting).				
	24.	Develop (or adapt and implement) procedures for the safe transport, handling and storage of potential pollutants.				
	25.	Avoid unnecessary use and transport of hazardous substances.				
	26.	Keep Material Safety Data Sheets for all hazardous materials on site and ensure that they are available for reference by staff responsible for handling and storage of materials.				
	27.	Place appropriately sized drip trays under vehicles and equipment when not in use – ensure these are strategically placed to capture any spillage of fuel, oil, etc.				
	28.	Clean up any spills immediately, through containment and removal of free product and appropriate disposal of contaminated soils.				
	29.	Undertake regular maintenance of vehicles and machinery to identify and repair minor leaks and prevent equipment failures.				

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
Vegetation clearing	30.	Limit the footprint area of the construction activity to what is absolutely essential. Only clear areas as per the approved Method Statement.	<ul style="list-style-type: none"> All contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual inspection Appointment of vegetation specialist Search and Rescue Report 	<ul style="list-style-type: none"> Size of area cleared relative to development footprint Size of area disturbed outside of construction site boundary Number of SCC relocated Permit on file.
	31.	Designate areas outside the development footprint as No go areas.				
	32.	Remove cleared vegetation off site to eliminate the fire risk unless directed differently by the Botanist or ECO.				
	33.	Ensure that no vegetation is removed or disturbed outside the delineated construction site boundary.				
	34.	Immediately stabilize slopes that are disturbed / cleared for construction with geofabric or another appropriate erosion stabilisation technique to prevent erosion.				
	35.	Restrict the movement of construction vehicles to new and existing access roads only.				
	36.	Avoid removal and damage of SCC and provincially protected plants where possible.				
Topsoil storage	37.	Limit construction and lay down areas to areas within the development footprint.	<ul style="list-style-type: none"> All contractors 	<ul style="list-style-type: none"> Before construction commences 	<ul style="list-style-type: none"> Visual inspection 	<ul style="list-style-type: none"> Incidence of Erosion and Incidence of incorrect storage and harvesting of topsoil
	38.	Designate areas outside the development footprint as "No go" areas				
	39.	Designate and demarcate areas to be used for topsoil stockpiling.				
	40.	Remove topsoil (up to a maximum of 30 cm depth)		<ul style="list-style-type: none"> During vegetation clearing 		
	41.	Strip and store topsoil and subsoil separately.				
	42.	Stockpile topsoil prior to the commencement of construction activities (stockpile no higher than 2m) and conserve topsoil for landscaping and rehabilitation.				
	43.	Locate topsoil stockpiles in an area protected from the wind and agreed to with the ECO.				
	44.	Locate all topsoil stockpiles in areas where they will not have to be relocated prior to replacement for final rehabilitation.				
	45.	Locate topsoil stockpiles away from aggregate, cement, concrete, fuels, litter, oils, domestic and wastes.				
	46.	Ensure suitable control of run-off during the construction phase to prevent erosion of topsoil on adjacent land and undeveloped portions of the site.				

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
	47.	Replace harvested topsoil in areas that are to be rehabilitated as soon as sections of the works are completed (i.e. not only following the completion of all works)				
Concrete/Cement Work	48.	Use Ready-Mix concrete rather than batching where possible.	<ul style="list-style-type: none"> All contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual inspection and approval of Method Statement by Eskom and ECO. 	<ul style="list-style-type: none"> Number of incidents of batching outside works footprint Contamination of water and soil Visible litter / waste on site.
	49.	Ensure that cement truck delivery chutes are cleaned in a designated area where wastewater can be disposed of in the correct manner. A suitable washing facility is to be developed on site in consultation with the ECO.				
	50.	Batch cement in a bunded area within the boundaries of the development footprint only (where unavoidable).				
	51.	Ensure that cement is mixed on mortar boards and not directly on the ground (where unavoidable).				
	52.	Physically remove any remains of concrete, either solid, or liquid, immediately and dispose of as waste.				
	53.	Place empty cement bags in bins and dispose of bags as waste to a licensed waste disposal facility.				
	54.	Sweep / rake / stack excess aggregate / stone chip / gravel / pavers into piles and dispose at a licensed waste disposal facility.				
Waste management	55.	Submit a method statement for waste management (including hazardous waste).	<ul style="list-style-type: none"> Eskom All contractors 	<ul style="list-style-type: none"> Before start of activities on site Throughout construction 	<ul style="list-style-type: none"> Availability and adherence to waste plan Visual inspection of waste collection and disposal areas Visual inspection of construction areas (litter) Check waste disposal slips 	<ul style="list-style-type: none"> Monitor procedures to ensure the waste management plan is implemented. Presence of litter Availability of rubbish bins and skips Degree to which rubbish bins and skips are filled Total volume of general and hazardous waste storage capacity Total volume of general and hazardous waste stored on site
	56.	Train all staff in the effects of debris and litter in the environment and appropriate disposal procedures.				
	57.	Aim to minimise waste through reducing and re-using (packaging) material.				
	58.	Collect recyclables separately and deliver these to suitable facilities or arrange for collection.				
	59.	Collect all waste in labelled bins and/or skips at the construction site.				
	60.	Prevent littering by construction staff at work sites by providing bins or waste bags in sufficient locations.				
	61.	Provide separate bins for hazardous / polluting materials and mark these clearly. Store hazardous / polluting materials on impermeable ground until it is disposed of / collected.				
	62.	Dispose of waste appropriately to prevent pollution of soil and groundwater.				

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
	63.	Do not allow any burning or burying of waste on site.				<ul style="list-style-type: none"> Degree to which different waste is separated Frequency of waste collection
Stormwater management	64.	Submit a method statement for Stormwater Management.	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual inspection 	<ul style="list-style-type: none"> Incidence of stormwater contamination Visible leaks/ water wastage Visible surface erosion Compliance with SWMP
	65.	Collect stormwater from bunded areas in a suitable container and remove from the site for appropriate disposal.				
	66.	Use berms and stormwater drainage systems to prevent surface run-off from entering site excavations.				
	67.	Implement measures to maximise the infiltration of stormwater on site.				
	68.	Implement measures stipulated in the SWMP (see Appendix A).				
	69.	Construct all drainage channels and stormwater drainage systems according to the engineer's design.				
	70.	Install temporary diversion systems / berms around the construction site or at certain problematic areas (including temporary access roads and parking bays) during construction to prevent ponding, flooding or contamination of stormwater with contaminants.				
	71.	Temporary roads should be kept to a minimum to avoid multiple access routes/roads and should only be constructed if absolutely necessary.				
	72.	Temporary parking bays/roads should consist of a compacted coarse gravel layer (if necessary).				
	73.	Any construction material stockpiles should be protected by berms (or another mechanism) to ensure that material cannot be mobilised by runoff and/or potentially block the stormwater system.				
74.	Place oil traps under stationary machinery, only re-fuel machines at designated fuelling points, immediately clean oil and fuel spills and dispose contaminated material (soil, etc.) at licensed sites only.					
75.	Ensure that spill kits appropriate to the hazardous substance/s are available at all times on the site.					

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
	76.	Draw up and strictly enforce a procedure for the storage, handling and transport of the battery containers, and other hazardous materials on site (including fuel storage areas). This procedure should be informed by hazardous material safety data sheets and discussions with the supplier.				
	77.	Ensure vehicles and equipment are in good working order.				
	78.	Ensure that good housekeeping and maintenance rules are applied.				
	79.	Inspect the site weekly for signs of spills.				
	80.	Ensure that onsite sanitation facilities are appropriately designed, are well maintained and serviced regularly.				
	81.	Excavations filled with rain water may be pumped out and the water released into the environment.				
	82.	Handle and store waste in such a way as to prevent mixing with water.				
Erosion management	83.	Ensure that all roads and tracks used for construction have the appropriate water diversion / erosion control structures.	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual inspection 	<ul style="list-style-type: none"> Visible surface erosion.
	84.	Stabilise slopes disturbed / cleared for construction with geofabric or another appropriate erosion stabilisation technique if erosion does occur.				
Dust management	85.	Submit and Implement a Dust Management Plan.	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual assessment of dust plumes Visual assessment of dust control measures 	<ul style="list-style-type: none"> Visibility of dust coming off construction site Dust mitigation measures in place Number of days that dust plumes are visible Number of registered complaints Size of disturbed areas
	86.	Avoid clearing of vegetation until absolutely necessary (i.e. just before excavations).				
	87.	Regularly evaluate the effectiveness of all dust management measures. Amend how or which measures are used if necessary.				
	88.	Stabilise exposed surfaces as soon as is practically possible.				
	89.	Avoid excavation, handling and transport of materials which may generate dust under high wind conditions or when a visible dust plume is present.				

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
	90.	Minimise dust generated off stockpiles: <ul style="list-style-type: none"> • Locate piles in sheltered areas where possible; • Place the stockpile lengthwise into the wind; • Minimise the slope of the stockpile (maximum slope of 2:1); • Limit stockpile sizes; • Install barriers on three sides of the stockpile (maximum 50% material porosity) if required; • Limit activity to the downwind side of the pile; • Use the last in – first out system of stockpile management; and • Cover stockpiles when not in active use for some time and / or use an environmentally friendly chemical spray to bind soil. 				
	91.	Limit vehicle speeds to 20 km/h on unconsolidated and non-vegetated areas.				
	92.	Cover trucks transporting loose material to or from site with tarpaulins, plastic or canvas.				
	93.	Ensure that any material spilled from trucks during transport to or from the site is cleaned up immediately.				
	94.	Use bedliners to minimise seepage and spillage of material from bottom-dumping trucks.				
	95.	Check weather reports daily and closely observe weather patterns to enable action to be taken immediately if conditions change.				
	96.	Limit the number of vehicles allowed on-site and restrict the movement of these vehicles over unsurfaced or unvegetated areas once they are on site to reduce dust problems.				
	97.	Sweep roads leading from the site if wheel washing facilities do not effectively prevent mud being deposited on access roads.				
	98.	Reduce airborne dust at construction sites through: <ul style="list-style-type: none"> • Dampening dust-generating areas with non-potable water if available (and necessary); • Use of cloth or brush-barrier fences; and • Covering dumps or stockpiles of loose material with plastic sheeting or netting, especially during windy conditions. 				

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
Noise management	99.	Limit construction activities to Mondays to Saturdays between the hours of 07h00 and 18h00, or in accordance with relevant municipal bylaws, if applicable.	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Times during which construction takes place 	<ul style="list-style-type: none"> Number of registered complaints
	100.	Limit particularly noisy operations to Mondays to Fridays between the hours of 08h00 and 17h00.				
	101.	Control the use of radios, television sets and other such equipment used by workers to a level that does not disturb neighbouring residents/tenants.				
	102.	Maintain all generators, vehicles, vessels and other equipment in good working order to minimise exhaust fumes and excess noise.				
	103.	Investigate and respond to complaints about excessive noise and take appropriate corrective action.				
	104.	Enclose diesel generators used for power supply to reduce unnecessary noise.				
Fire Management	105.	Ensure that no fires are permitted on or adjacent to site.	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Inspect attendance register for training sessions; and Inspect fire extinguishers and certificates. 	<ul style="list-style-type: none"> Number of fire incidents Certified extinguishers in appropriate locations.
	106.	Ensure that no smoking is permitted on the site.				
	107.	Ensure that sufficient fire-fighting equipment is available on site.				
	108.	Equip all hazardous substance stores and waste storage areas with fire extinguishers.				
	109.	Ensure that all personnel on site are aware of the location of firefighting equipment on the site and how the equipment is operated.				
	110.	Suitably maintain firefighting equipment.				
	111.	Liaise with the local fire-fighting department with regards to emergency procedures.				
Transportation and refuelling	112.	Undertake regular maintenance of vehicles and machinery to identify and repair minor leaks and prevent equipment failures.	<ul style="list-style-type: none"> All contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual inspection of vehicles, barges, machinery and refuelling/maintenance areas 	<ul style="list-style-type: none"> Number of incidents of non-compliance Number of leaks and spills Cost of cleaning up spills.
	113.	Undertake any on-site refuelling and maintenance of vehicles/machinery in designated areas. Line these areas with an impermeable surface, secondary containment measures and install oil traps.				
	114.	Use appropriately sized drip trays for all refuelling and/or repairs done on machinery – ensure these are strategically placed to capture any spillage of fuel, oil, etc.				

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
	115.	Clean up any spills immediately, through containment and removal of free product and appropriate disposal of contaminated soils.				
	116.	Keep spill containment and clean-up equipment at all work sites and for all polluting materials used at the site.				
Fauna Management	117.	Flush out fauna before establishing site camp and site boundaries.	<ul style="list-style-type: none"> Contractor 	<ul style="list-style-type: none"> Before construction commences 	<ul style="list-style-type: none"> Visual inspection 	<ul style="list-style-type: none"> Number of animals flushed out of area
	118.	Do not harm, catch or kill birds or animals by any means, including poisoning, trapping, shooting or setting of snares.	<ul style="list-style-type: none"> Contractor 	<ul style="list-style-type: none"> Duration of construction activities 	<ul style="list-style-type: none"> Visual Inspection 	<ul style="list-style-type: none"> Number of animals harmed/ incidents Time period trenches are left open Number of incidents of animals found in trenches.
	119.	Backfill trenches as soon as possible to ensure that the time the trench is exposed is kept to a minimum.				
	120.	Open trenches must be inspected on a daily basis for animals which may have fallen or become trapped.				
	121.	Safely remove and relocate any fauna that may be physically harmed by construction activities.				
Protection of archaeological and paleontological resources	122.	Inform employees and contractors that archaeological or paleontological artefacts, including human skeletal remains, might be exposed during construction activities.	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Before construction commences 	<ul style="list-style-type: none"> Visual inspection 	<ul style="list-style-type: none"> Time to rehabilitation Size of disturbed areas.
	123.	Empower staff to stop works on (chance) discovery of artefacts at the site.		<ul style="list-style-type: none"> During earthworks 		
	124.	Report the presence of graves or human remains, fragments of fossil bone, ostrich egg and stone fragments to Heritage Western Cape.				
	125.	Stop works and obtain a permit for the removal of artefacts from the site if any are discovered during construction.				
Traffic Management	126.	Manage construction sites and activities so as to minimise impacts on road traffic as far as possible, e.g.: <ul style="list-style-type: none"> Attempt to arrange delivery of materials when it will least disrupt traffic; Stagger deliveries if possible rather than concentrating them during "rush" hours; and Keep construction materials and machinery at the construction site throughout the construction period, where possible. 	<ul style="list-style-type: none"> All contractors operating vehicles 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Keep record of vehicles entering the site and time they enter; Keep record of incidents and complaints; and Visually inspect vehicles for any obvious faults or overloading. 	<ul style="list-style-type: none"> Number of incidents and complaints Number of vehicles travelling to site each day Condition of vehicles.
	127.	Notify local authorities, road authorities and affected stakeholders prior to construction activities and transport of battery storage containers.				

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
	128.	Use appropriate road signage, in accordance with the South African Traffic Safety Manual, providing flagmen, barriers etc. at the various access points when necessary.				
	129.	Ensure that large construction vehicles are suitably marked to be visible to other road users and pedestrians.				
	130.	Ensure that vehicles transporting battery storage containers are suitably marked noting the hazardous nature of their load.				
	131.	Ensure that relevant safety measures and signage are in place when containers are delivered to site.				
	132.	Ensure that all safety measures are observed and that drivers comply with the rules of the road.				
	133.	Ensure that vehicle axle loads do not exceed the technical design capacity of roads utilised by the project.				
	134.	Investigate and respond to complaints about traffic.				
	135.	Manage construction sites and activities to minimise impacts on road traffic as far as possible, e.g. minimise the unnecessary movement of construction vehicles.				
	136.	Maintain and repair roads damaged by construction vehicles, in consultation with relevant road authorities.				
	137.	Ensure that all safety measures are observed and that drivers of construction vehicles comply with the rules of the road.				
	138.	Maintain and repair damage caused by trucks on DR2225, in consultation with relevant road authorities.				
Visual aspects	139.	Paint the battery storage containers (and where possible, associated infrastructure such as fencing) grey or brown. Avoid the use of light colours (e.g. white).	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual inspection 	<ul style="list-style-type: none"> Colour of infrastructure Number of complaints
	140.	Limit outdoor security lighting and ensure that it is as unobtrusive as possible.				
	141.	Attach signs to existing structures to avoid free standing signs in the landscape during the construction period as much as possible.				
	142.	Control litter and keep construction site as clean and neat as possible.				
Ablution facilities	143.	Provide ablution facilities (i.e. chemical toilets) for all site staff at a ratio of 1 toilet per 15 workers (absolute minimum 1:25).	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual inspections 	<ul style="list-style-type: none"> Number of incidents of staff not using facilities

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
	144.	Secure all temporary / portable toilets to the ground to the satisfaction of the ECO to prevent them toppling due to wind or any other cause.			<ul style="list-style-type: none"> Records of waste disposal 	<ul style="list-style-type: none"> Number of pollution incidents
	145.	Maintain toilets in a hygienic state (i.e. toilet dispensers to be provided, toilets to be cleaned and serviced regularly (at least "twice- monthly" by an appropriate waste contractor), and toilets to be emptied before long weekends and builders' holidays.				
	146.	Remove / appoint an appropriate Sub-Contractor to remove accumulations of chemicals and treated sewage from the site and dispose of at an approved waste disposal site or wastewater treatment works.				
	147.	Ensure that no spillages occur when the toilets are cleaned or emptied. Repeated incidents of spillage of chemicals and or waste (i.e. more than one incident), will require toilets to be placed on a solid base with a sump.				
Water conservation	148.	Use water sparingly and conserve water whenever possible.	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Monthly water consumption records 	<ul style="list-style-type: none"> No evidence of water wasted Consistent water usage
	149.	Source and maintain records of water purchased.			<ul style="list-style-type: none"> Water purchased or consumed from a licensed facility/supplier 	<ul style="list-style-type: none"> Records of water use or purchase available
Response to environmental pollution	150.	Develop a spill response procedure for approval by the ECO. In the event of environmental pollution, e.g. through spillages, immediately stop the activity causing the problem.	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Maintain register of pollution events and response Following resumption of activities, frequently inspect repaired equipment to ensure proper functioning 	<ul style="list-style-type: none"> Number of incidents Time activities stopped Number of recurring incidents Availability and completeness of register and records
	151.	Only resume activity once the problem has been stopped or (in the case of spillages) the pollutant can be captured without reaching the environment.				
	152.	Repair faulty equipment as soon as possible.				
	153.	Install additional bunding / containment structures around the equipment that was the source of the leak / spillage to prevent pollution from reaching the environment in future.				
	154.	Treat hydrocarbon spills, e.g. during refuelling, with adequate absorbent material, which then needs to be disposed of at a suitable hazardous waste landfill.				
Invasive species control	155.	Remove all alien and weed species encountered within areas disturbed by construction activities:	<ul style="list-style-type: none"> Contractors 			

Construction Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ³	Performance Indicators
	156.	Where possible, remove alien species by hand and not with chemicals.		• Throughout construction	• Check evidence of alien vegetation	• Construction footprint and road reserve clear of alien vegetation
	157.	Keep footprint areas as small as possible when removing alien plant species.				
	158.	Dispose of removed alien plant material at a licensed waste disposal site.				
Site rehabilitation and closure	159.	Plan and make adequate financial provision for rehabilitation and restoration activities and clearly allocate timing and responsibility for environmental rehabilitation.	• Contractor	Prior to construction	Record of financial provisioning for rehabilitation	Financial provisioning for rehabilitation in place
	160.	Ensure that slopes are immediately stabilized to prevent erosion, using geofabric or other appropriate erosion stabilisation techniques.		Once construction is complete; or	Visual inspection of site	Rehabilitation forms an integral part of operations from start-up
	161.	Remove all construction equipment, vehicles, equipment, waste and surplus materials, including site offices, temporary fencing and diesel, from the site.		Throughout construction if it takes place in phases / different areas sequentially	Keep record of rehabilitation measures	Construction sites fully rehabilitated within five years
	162.	Clean up and remove any spills and contaminated soil in the appropriate manner.				
	163.	Ensure that no discarded materials are buried on site or on any other land not designated for this purpose.				
	164.	Ensure that affected areas are rehabilitated following construction.				
	165.	Use harvested topsoil for rehabilitation.				
	166.	Rehabilitate project areas with locally indigenous species, reseeding, using anti-erosion measures such as biobarrier or soil saver as soon as possible after activities have ceased at each area, or as directed by the Botanist.				
	167.	Replace harvested topsoil in areas that are to be rehabilitated as soon as sections of the works are completed (i.e. not only following the completion of all works).				
	168.	Rehabilitate all project areas as soon as possible after completion of activities in each area, including removing and/or remediating any contaminated soils.				
	169.	Source and maintain records of water purchased.				

4 Measures Applicable to the Operation / Maintenance Phase

4.1 Maintenance Management Plan

The objective of the MMP is to provide environmental management measures for the ongoing maintenance of the BESS and access roads, and emergency repairs.

Eskom may trigger Listing Notice 1, Activity 27 listed in NEMA during maintenance of the BESS and access roads associated with clearing indigenous vegetation.

Eskom can undertake this activity during maintenance without the need for EA in terms of this MMP (once approved).

4.1.1 Roles and Responsibilities

The key role players during Operational / Maintenance Phase are anticipated as follows:

- Eskom (the proponent);
- Engineer/s who will undertake operational activities and/ or oversee the activities of the contractors on site;
- Contractors / Service Providers responsible for maintenance of the BESS;
- Any sub-contractors hired by Contractors / Service Providers; and
- Eskom Environmental Practitioners who will implement the MMP and ensure compliance.

Key roles and responsibilities during Operational / Maintenance Phase with respect to the implementation of the MMP are outlined below.

Eskom:

- Ensure that all contractors / service providers / staff executing work for Eskom for the project are aware of the requirements of the MMP; and
- Appoint a suitably qualified and experienced staff member/s to review the environmental performance of contractors and staff.

Contractors:

- Comply with the applicable environmental commitments, procedures, restrictions and guidance specified in the MMP;
- Co-operate fully in implementing applicable environmental procedures;
- Ensure that copies of the MMP are available on site;
- Ensure that all personnel on site, (including any sub-contractors and their staff) are familiar with and understand the requirements of the MMP relevant to their activities; and
- Ensure that any problems and non-conformances are remedied in a timely manner, to the satisfaction of the relevant management personnel at Eskom.

4.1.2 Compliance and Monitoring: Maintenance Activities

Any person appointed to undertake maintenance may be requested to submit a Method Statement for the works to be undertaken. The Method Statement will be submitted by the Contractor/ Appointed person to Eskom Environmental Management not less than **14 days** prior to the intended date of commencement of maintenance. Eskom Environmental Management shall approve / reject the Method Statement within **2 days**. An activity covered by a Method Statement shall not commence until the Operational Manager (project initiator) and Eskom Environmental Management has approved of such method and once approved, the Contractor/ Appointed person shall abide by the relevant Method Statement. A pro forma Method Statement is attached in Appendix A, although a suitable Method Statement format can be agreed between the Operational Manager (project initiator) / Eskom Environmental Management and Contractor/ Appointed person.

4.1.3 Environmental Management Measures

The environmental management and mitigation measures that must be implemented during the Operational / Maintenance Phase, as well as responsibilities and timelines for the implementation of these measures and monitoring thereof, are laid out in Table 4-1 **Error! Reference source not found.** below.

Table 4-1: Environmental management and mitigation measures that must be implemented during the Operational / Maintenance Phase

Operational Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ⁴	Performance Indicators
Compliance Monitoring	1.	Audit compliance with the MMP.	• Eskom	• Once every two years	• Check record of audit	• Check frequency of compliance inspections
	2.	Record and retain the audit results.	• Eskom	• Once every two years		
	3.	Appoint a suitably qualified Eskom Environmental Management staff member to periodically inspect and report on compliance with the MMP during or following physical maintenance activities.	• Eskom Environmental Management	• Annually		
	4.	Increase the frequency of compliance inspections if significant non-conformances are reported.	• Eskom	• Following non-conformances		
	5.	Appoint an independent person with environmental auditing expertise to undertake an environmental audit to determine compliance with the conditions of the EA and the EMPr and recommend improvements (if required) as per the specifications in S34 of the EIA Regulations, 2014.	• Eskom	• Every three years throughout the operational phase unless the frequency is changed based on an audit recommendation by the independent auditor.	• Check record of audit	• Check frequency of compliance inspections
Community Complaints	6.	Respond to complaints that are made.	• Eskom	• Throughout operations	• Check compliance reports	• Check record of correspondence
Maintenance of BESS	7.	Ensure that battery supplier user guides, safety specifications and MSDS are filed on site at all times.	• Eskom	• Throughout operations	• Check that documents filed on site	• Documents filed on site
	8.	Operate, maintain and monitor the BESS as per supplier specifications.			• Keep supplier specifications on file	• Incidents of malfunctioning of battery system due to non-compliance with supplier specifications
	9.	Compile method statements for approval by the Eskom Environmental Practitioner for battery cell, electrolyte and battery cell/ container replacement. Maintain method statements on site.	• Contractors/ Maintenance staff		• Method statements submitted and approved by Eskom	• Method statements compiled and filed on site
	10.	Ensure that all maintenance contractors/ staff are familiar with the supplier's specifications. Maintenance activities undertaken during the Operational Phase must adhere to the applicable environmental management measures provided for the Construction Phase.	• Eskom		• Method statements comply with supplier specifications.	• Incidents of malfunctioning of battery system due to non-compliance with supplier specifications

⁴ Unless otherwise indicated, monitoring will be undertaken by Eskom, supported by the authorities where the requirement is specifically stipulated in a licence or permit.

Operational Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ⁴	Performance Indicators
	11.	Provide signage on site specifying the types of batteries in use and the risk of exposure to hazardous material and electric shock.			• Visual inspection	• Signage on site
	12.	Provide signage on site specifying how electrical and chemical fires should be dealt with by first responders, and the potential risks to first responders (e.g. toxic fumes). Provide suitable firefighting equipment on site.			• Visual inspection	• Signage on site
	13.	Maintain strict access control to the battery storage area.			• Monitor who enters and exits the substation	• Incidents of unauthorised entry
	14.	Undertake regular visual checks on BESS equipment to identify signs of damage or leaks.			• Regular checks taking place	• Incidents of damage to exterior of batteries
Waste management	15.	Develop a waste management plan, laying out: <ul style="list-style-type: none"> • Expected type and amount of waste; • Measures to reduce waste; • Type of storage for different waste types; • Waste contractors that will collect waste; and • Monitoring procedures to ensure the waste management plan is implemented. 	• Eskom	• Throughout operations	• Regular audits against plan	• Availability of plan • Extent to which plan is complied with
	16.	Ensure that service providers dispose of used batteries properly by requesting and retaining receipts for disposal/refurbishment.	• Eskom	• Throughout operations	• Check that receipts available for disposal/refurbishment	• Availability of disposal receipts.
Stormwater management	17.	Ensure that stormwater is managed according to the recommendations of the approved SWMP.	• Eskom	• Throughout operations	• Visually inspect stormwater system	• Compliance with SWMP
	18.	Ensure that visible signage and emergency numbers are placed indicating who to call if any problem with stormwater or any other environmental issues is noticed.				
	19.	Clean up any spills immediately, through containment and removal of free product and appropriate disposal of contaminated soils.				
	20.	Bund all battery containers (hazardous chemicals) in accordance with legal requirements and supplier requirements.				
	21.	Ensure signage on all battery storage areas indicating as a minimum: <ul style="list-style-type: none"> • The battery type (and chemical name/s). • Who to contact (immediately) if a spill or leak is detected. • MSDS sheets (alternatively ensure that these are available on site). 				
22.	Remediate spills and repair battery leaks.					

Operational Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ⁴	Performance Indicators
	23.	Inspect the site for: <ul style="list-style-type: none"> Spills and leaks in/from battery storage areas. Blockages in stormwater systems. Litter, particularly litter in any stormwater channels, culvert, drains etc. New oil or fuel stains from vehicles. Full or faulty bunds and oil/water separators. 				
	24.	<i>Run training courses annually for all employees that visit the site (or as needed) to inform them of the contents of this plan and how to inspect the site and who to inform if issues are noted;</i>				
	25.	Maintain the following registers on site: <ul style="list-style-type: none"> Register of spills. Incident Management records with the corrective actions taken after spills. Waste disposal records. Attendance registers for training courses. An inventory of battery types (and associated chemicals) on the site. Record of all inspections. 				
Hazardous materials	26.	Develop (or adapt and implement) procedures for the safe transport, handling and storage of potential pollutants.	• Eskom	• Throughout operations	<ul style="list-style-type: none"> Visual inspection of hazardous materials handling and storage areas Emergency procedures developed 	<ul style="list-style-type: none"> Number of incidents of non-compliance with safety procedures concerning hazardous materials, including waste materials Number of spills of hazardous materials, including waste materials Cost of cleaning up spills
	27.	Develop emergency procedures (in relation to fire, spills, contamination of the ground, accidents to employees, use of hazardous substances, etc.)				
	28.	Avoid unnecessary use and transport of hazardous substances.				
	29.	Keep Material Safety Data Sheets for all hazardous materials on site and ensure that they are available for reference by staff responsible for handling and storage of materials.				
Employment	30.	Consider maximising the employment of local workers and formalising this policy in contracts.	• Eskom	<ul style="list-style-type: none"> Throughout operations Before new workers start for the first time Before new activities are undertaken 	<ul style="list-style-type: none"> Keep record of staff by origin Attendance registers of training sessions Keep record that measure was considered and why it was (not) implemented 	<ul style="list-style-type: none"> Percentage of local staff Percentage of goods procured locally
	31.	Consider purchasing resources from local sources wherever possible.				

Operational Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ⁴	Performance Indicators
Response to environmental pollution	32.	Ensure a quantity of appropriate remedial agent, capable of containing and/or remediating a hazardous spill is available on site at all times in case of an emergency spill. The material shall be capable of handling a spill of at least 200l.	<ul style="list-style-type: none"> Eskom Contractors 	<ul style="list-style-type: none"> Throughout operations 	<ul style="list-style-type: none"> Maintain register of pollution events and response Following resumption of activities, frequently inspect repaired equipment to ensure proper functioning 	<ul style="list-style-type: none"> Number of incidents Time activities stopped Number of recurring incidents
	33.	Treat spills with adequate absorbent material, which then needs to be disposed of at a suitable landfill.				
	34.	Immediately remediate and rehabilitate areas in the event of a spill of an environmentally hazardous substance.				
	35.	Report all environmental incidents to the OU Eskom Environmental Management team and the Relevant Authority within 24 hours of an environmental incident (S30 of NEMA and S20 of NWA).				
	36.	Submit the environmental incident feedback report to the Relevant Authority within fourteen days of an environmental incident (S30 of NEMA).				
	37.	Report all environmental emergencies to the DEA as soon as detected in accordance to S30A of NEMA and S20 of NWA.				
	38.	In the event of environmental pollution, e.g. through spillages, immediately stop the activity causing the problem.				
	39.	Only resume activity once the problem has been stopped or (in the case of spillages) the pollutant can be captured without reaching the environment.				
	40.	Repair faulty equipment as soon as possible.				
	41.	Determine if additional bunding / containment structures around the equipment is required.			<ul style="list-style-type: none"> Visually inspect adequacy of bunding 	
Fire Management	42.	Prepare and annually review a fire risk assessment.	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Inspect attendance register for training sessions; and Inspect fire extinguishers and certificates. 	<ul style="list-style-type: none"> Number of fire incidents Certified extinguishers in appropriate locations.
	43.	Ensure that no fires are permitted on or adjacent to site.				
	44.	Ensure that no smoking is permitted on the site.				
	45.	Ensure that sufficient fire-fighting equipment is available on site.				
	46.	Equip all hazardous substance stores and waste storage areas with fire extinguishers.				
	47.	Ensure that all personnel on site are aware of the location of firefighting equipment on the site and how the equipment is operated.				

Operational Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ⁴	Performance Indicators
	48.	Suitably maintain firefighting equipment.				
	49.	Liaise with the local fire-fighting department with regards to emergency procedures.				
	50.	Minimize the storage of flammable liquids on site (over and above the BESS or to fuel the BESS).				
	51.	Provide suitable emergency and safety signage on site, and demarcate any areas which may pose a safety risk (including hazardous substances.). Emergency numbers for local police, fire department, Eskom and the Local Municipality must be placed in a prominent clearly visible area on site.				
	52.	Designate an emergency tipping area for waste loads identified to be on fire or otherwise deemed to be an immediate risk.				
	53.	Trim overgrown vegetation along access roads.				
	54.	Respond to reports of the presence of alien plant species through eradication.				
	55.	Remove cuttings of alien vegetation from the site.				
Protection of Flora	56.	Limit vegetation clearance, pruning and the footprint of maintenance activities to what is absolutely essential.	<ul style="list-style-type: none"> Contractor Eskom 	<ul style="list-style-type: none"> Throughout operations 	<ul style="list-style-type: none"> Check for unnecessary disturbances 	<ul style="list-style-type: none"> Evidence of unnecessary disturbance
	57.	Favour vegetation pruning over clearing.				
	58.	Inspect access roads annually during routine maintenance and report on the presence or absence of invasive alien plant species.				
	59.	Respond to reports of the presence of alien plant species through eradication and the application of herbicides in the Eskom servitude, where appropriate.				
	60.	Remove cuttings of alien vegetation from the site.				
	61.	Restrict laydown areas for maintenance and repair work to areas disturbed during construction of the project.				
	62.	Designate areas outside the previous construction footprint as no-go areas.				
	63.	Restrict the movement of vehicles to access roads only.				
Protection of Fauna	64.	Do not harm, catch or kill birds or animals by any means, including poisoning, trapping, shooting or setting of snares.	<ul style="list-style-type: none"> Contractor 	<ul style="list-style-type: none"> Throughout operations 	<ul style="list-style-type: none"> Check for evidence of faunal mortalities 	<ul style="list-style-type: none"> Number of faunal mortalities
	65.	Avoid fauna when driving on site (especially tortoises).				
Dust management	66.	Submit and Implement a Dust Management Plan.				

Operational Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ⁴	Performance Indicators
	67.	Avoid clearing of vegetation until absolutely necessary (i.e. just before excavations).	<ul style="list-style-type: none"> Contractors 	<ul style="list-style-type: none"> Throughout construction 	<ul style="list-style-type: none"> Visual assessment of dust plumes Visual assessment of dust control measures 	<ul style="list-style-type: none"> Visibility of dust coming off construction site Dust mitigation measures in place Number of days that dust plumes are visible Number of registered complaints Size of disturbed areas
	68.	Regularly evaluate the effectiveness of all dust management measures. Amend how or which measures are used if necessary.				
	69.	Stabilise exposed surfaces as soon as is practically possible.				
	70.	Avoid excavation, handling and transport of materials which may generate dust under high wind conditions or when a visible dust plume is present.				
	71.	Minimise dust generated off stockpiles: <ul style="list-style-type: none"> Locate piles in sheltered areas where possible; Place the stockpile lengthwise into the wind; Minimise the slope of the stockpile (maximum slope of 2:1); Limit stockpile sizes; Install barriers on three sides of the stockpile (maximum 50% material porosity) if required; Limit activity to the downwind side of the pile; Use the last in – first out system of stockpile management; and Cover stockpiles when not in active use for some time and / or use an environmentally friendly chemical spray to bind soil. 				
	72.	Limit vehicle speeds to 20 km/h on unconsolidated and non-vegetated areas.				
	73.	Cover trucks transporting loose material to or from site with tarpaulins, plastic or canvas.				
	74.	Ensure that any material spilled from trucks during transport to or from the site is cleaned up immediately.				
	75.	Use bedliners to minimise seepage and spillage of material from bottom-dumping trucks.				
	76.	Check weather reports daily and closely observe weather patterns to enable action to be taken immediately if conditions change.				
	77.	Limit the number of vehicles allowed on-site and restrict the movement of these vehicles over unsurfaced or unvegetated areas once they are on site to reduce dust problems.				

Operational Phase Measures						
Aspect	ID	Mitigation measure / Procedure	Responsible	Implementation Timeframe	Monitoring Methods ⁴	Performance Indicators
	78.	Sweep roads leading from the site if wheel washing facilities do not effectively prevent mud being deposited on access roads.				
	79.	Reduce airborne dust at construction sites through: <ul style="list-style-type: none"> • Dampening dust-generating areas with non-potable water if available (and necessary); • Use of cloth or brush-barrier fences; and • Covering dumps or stockpiles of loose material with plastic sheeting or netting, especially during windy conditions. 				

Prepared by

Amy Hill
Environmental Consultant

Reviewed by

Scott Masson
Senior Environmental Consultant

**Appendix A:
Method Statement Pro Forma**

METHOD STATEMENT PRO FORMA

CONTRACT:.....

DATE:.....

PROPOSED ACTIVITY (give title of method statement):

WHAT WORK IS TO BE UNDERTAKEN (give a brief description of the works):

WHERE ARE THE WORKS TO BE UNDERTAKEN (where possible, provide an annotated plan and a full description of the extent of the works):

START AND END DATE OF WORKS FOR WHICH METHOD STATEMENT IS REQUIRED:

Start Date:

End Date:

HOW ARE THE WORKS TO BE UNDERTAKEN (provide as much detail as possible, including annotated maps and plans where possible):

Note: please attach extra pages if more space is required.

Appendix B: Stormwater Management Plan



15 April 2019
533767

Eskom Holdings SOC Ltd: Western Cape Operating Unit
Eskom Ring Road
Brackenfell
7561

Attention: Madré Delpont

Dear Madré

Stormwater Management Plan for the proposed Eskom Grid-Scale Battery Storage at the Skaapvlei Substation

1 Introduction

SRK Consulting (South Africa) (Pty) Ltd (SRK) was appointed by Eskom Holdings SOC Limited (Eskom) to compile a Stormwater Management Plan (SWMP) as part of an environmental assessment process for the installment of grid-scale battery storage units at Skaapvlei substation (the site).

1.1 Objectives

The SWMP will include design criteria and commitments that will adhere to internal Eskom objectives and local and national guidelines, which may, amongst others, include the following:

- Protect all life and property from flood damage;
- Protect water resources in the catchment areas from pollution and siltation;
- Protect and enhance the watercourses locally and downstream;
- Conserve the natural flora and fauna in the environment;

Partners R Armstrong, AH Bracken, N Brien, JM Brown, CD Dalglish, BM Engelsman, R Gardiner, M Hinsch, GC Howell, WC Joughin, DA Kilian, S Kisten, JA Lake, V Maharaj, DJ Mahlangu, I Mahomed, HAC Meintjes, MJ Morris, GP Nel, VS Reddy, PE Schmidt, PJ Shepherd, MJ Sim, VM Simposya, HFJ Theart, KM Uderstadt, AT van Zyl, MD Wanless, ML Wertz, A Wood

Directors AJ Barrett, GC Howell, WC Joughin, V Maharaj, VS Reddy, PE Schmidt, PJ Shepherd

Associate Partners PJ Aucamp, LSE Coetser, E Goossens, SG Jones, W Jordaan, F Lake, MJ Meiring, L Nedeljkovic, RD O'Brien, T Shepherd, JJ Slabbert, JS Stiff, M van Huyssteen, D Visser

Consultants JAC Cowan, *PrSci Nat, BSc(Hons)*; JH de Beer, *PrSci Nat, MSc*; JR Dixon, *PrEng*; T Hart, *MA, TTHD*; GA Jones, *PrEng, PhD*; PR Labrum, *PrEng*; RRW McNeill, *PrTech Eng*; PN Rosewarne, *PrSci Nat*; AA Smithen, *PrEng*; TR Stacey, *PrEng, DSc*; OKH Steffen, *PrEng, PhD*; WI Stewart, *PrSci Nat, MSc*, PJ Terbrugge, *PrSci Nat, MSc*, DJ Venter; *PrTech Eng*

SRK Consulting (South Africa) (Pty) Ltd

Reg No 1995.012890.07

African Offices:

Cape Town + 27 (0) 21 659 3060
Durban + 27 (0) 31 279 1200
East London + 27 (0) 43 748 6292
Johannesburg + 27 (0) 11 441 1111
Kimberley + 27 (0) 53 861 5798
Pietermaritzburg + 27 (0) 33 347 5069
Port Elizabeth + 27 (0) 41 509 4800
Pretoria + 27 (0) 12 361 9821
Rustenburg + 27 (0) 14 594 1280
Accra + 23 (3) 24 485 0928
Lubumbashi + 243 (0) 81 999 9775

Group Offices:

Africa
Asia
Australia
Europe
North America
South America



- Prevent soil erosion;
- Ensure sustainable stormwater management systems; and
- Contain all dirty stormwater on site for treatment or proper disposal.

1.2 Project Background

Eskom proposes installing grid-scale battery storage units at existing distribution substations in the Western Cape to strengthen the electricity distribution network and address capacity and/or voltage constraints. The two types of technology alternatives being considered by Eskom for battery storage at the substations are:

- Self-contained (solid state) batteries; and
- Flow batteries.

A single battery technology, or a combination of the technology alternatives, may be implemented. The chemical composition of all the batteries is considered hazardous, and the batteries will therefore be stored in containers and banded.

2 Site Information

The site is located approximately 25 km West of Lutzville, off the R363 within the West Coast District Municipality (see Figure 2-1 below).

The project is situated within Quaternary Catchment F60E, which is a winter rainfall region and receives a Mean Annual Precipitation (MAP) of between 100 and 200 mm, according to the Water Resources (2012) data. At times, large rainfall events might occur in succession that result in the catchment being saturated and generating notable surface flows.

The site area is characterised by relatively flat slopes ranging between 1° and 3°. All surface flow will drain in the direction of the low-lying area (or pan), which is located approximately 3 km towards the East of the site.

The areas immediately around the site consist predominantly of brush vegetation (as shown in Photo 2-1 and Photo 2-2). The site is located within a windfarm. The soil at the near surface consists of sand. Infiltration in the sandy soils will be high and thus the site will not be prone to ponding or dominant surface flows.



Photo 2-1: Sandy soils with revegetated areas around the site. Shallow sloping and predominantly brush vegetation



Photo 2-2: Proposed new battery storage area with wind turbines in the background

The proposed location of the battery containers (as shown in Photo 2-3) is clear of any water course and shows no ponding after a rain event. The current drainage channels and stormwater systems (trenches) appear to be efficient on this site (as can be seen on Photo 2-3). However, clearing/maintenance of stormwater systems is required.



Photo 2-3: The Skaapvlei substation



Photo 2-4: Excavated trench around the boundary of the site

Stormwater originating from the substation surface drains via the existing stormwater drainage systems, which channel clean stormwater away from the facility. The elevated platform barrier and trench around the site should prevent stormwater or surface (sheet) flow from flowing across the site.

The proposed battery storage units are considered to contain hazardous substances (as discussed in section 1.1) and will be stored in containers and banded.

The two power transformers at the existing substation are banded and connected to an oil/water separator dam. The oil/water separator dam collects and stores oil leaked and spilled into the banded transformer area by faulty equipment. The dam is designed in such a way that water and oil is separated, and the water escapes to the environment while the oil remains inside. The oil/water separator dam is inspected regularly and if oil is inside it is pumped out and disposed of as hazardous waste.

The new substation extension will add additional two or three banded power transformers to the site. If the existing oil/water separator dam is insufficient to hold the new storage capacity, then an additional oil dam will be constructed.

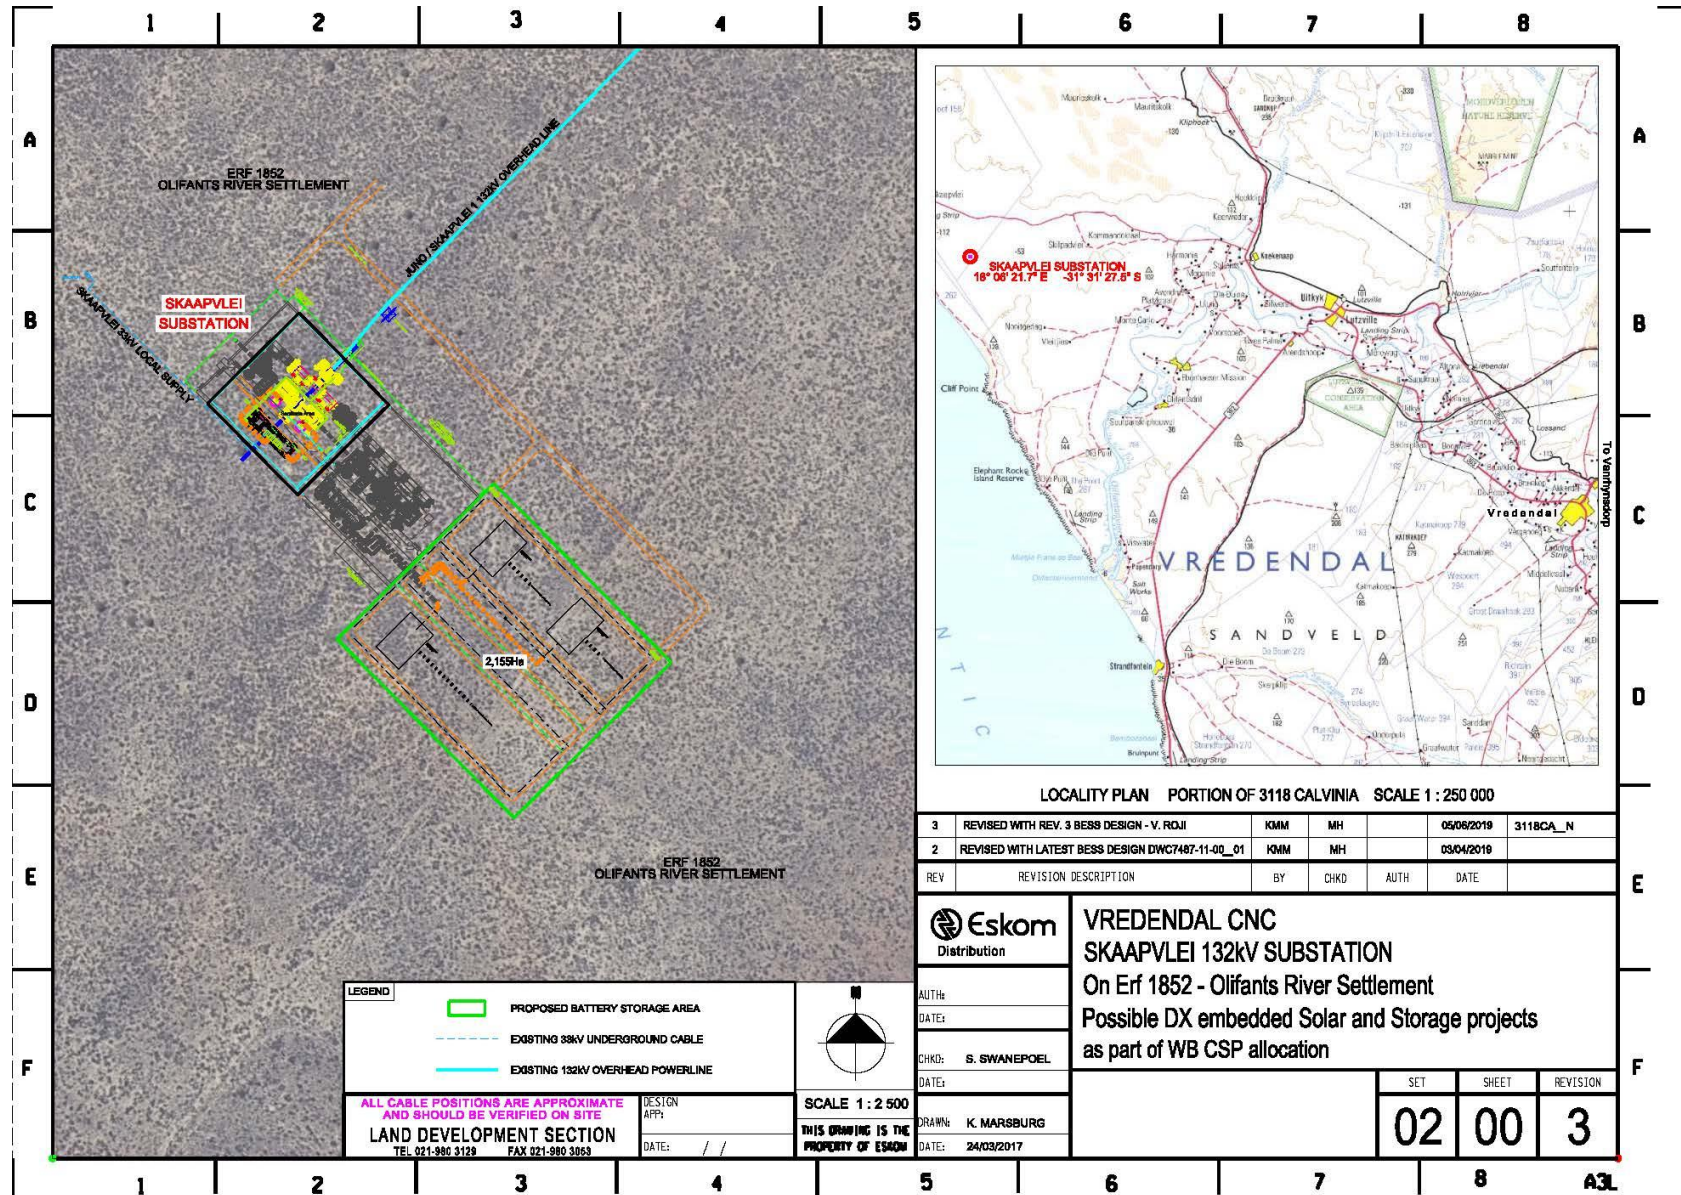


Figure 2-1: Locality map of the existing Eskom Skaapvlei substation (provided by Eskom).

3 Stormwater Management Plan

3.1 Design Phase

During detailed engineering design and planning of the civil and BESS infrastructure, the Engineer shall:

- Present designs for the expanded substation and BESS platforms, as well as any new roads.
- Ensure that storm water originating from upgradient (stormwater that could flow across the site from external areas) is diverted around the site.
- Present designs for maintaining the internal stormwater drains.
- Present designs for keeping stormwater separate from contaminated water and bunded areas to prevent water pollution.
- Design the drainage systems (of stormwater infrastructure, trenches, drains and outlets) to encourage dissipation of water, decreasing velocity of water and prevent erosion, ponding and flooding of the site and surrounding environment.
- Consider secondary and tertiary containment measures due to the hazardous nature of the battery electrolytes.

3.2 Construction Phase

The following stormwater management measures should be implemented during construction:

- Construct all drainage channels and stormwater drainage systems according to the engineer's design.
- Install temporary diversion systems / berms around the construction site or at certain problematic areas (including temporary access roads and parking bays) during construction to prevent ponding, flooding or contamination of stormwater with contaminants.
- Temporary roads should be kept to a minimum to avoid multiple access routes/roads and should only be constructed if absolutely necessary.
- Temporary parking bays/roads should consist of a compacted coarse gravel layer (if necessary).
- Any construction material stockpiles should be protected by berms (or another mechanism) to ensure that material cannot be mobilised by runoff and/or potentially block the stormwater system.
- Place oil traps under stationary machinery, only re-fuel machines at designated fuelling points, immediately clean oil and fuel spills and dispose contaminated material (soil, etc.) at licensed sites only.
- Ensure that spill kits appropriate to the hazardous substance/s are available at all times on the site.
- Draw up and strictly enforce a procedure for the storage, handling and transport of the battery containers, and other hazardous materials on site (including fuel storage areas). This procedure should be informed by hazardous material safety data sheets and discussions with the supplier.
- Ensure vehicles and equipment are in good working order.
- Ensure that good housekeeping and maintenance rules are applied.
- Inspect the site weekly for signs of spills.

- Ensure that onsite sanitation facilities are appropriately designed, are well maintained and serviced regularly.
- Excavations filled with rain water may be pumped out and the water released into the environment.
- Handle and store waste in such a way as to prevent mixing with water.

This stormwater plan is to be communicated to all staff.

3.3 Operational Phase

The following stormwater management measures should be implemented during the operational phase:

- Clearly visible signage and emergency numbers shall be placed indicating who to call if any problem with stormwater or any other environmental issues is noticed.
- All necessary spill kits appropriate to the hazardous substance shall be kept on the site.
- All battery containers (hazardous chemicals) shall be banded in accordance with legal requirements and supplier requirements.
- Signs shall be placed on all battery storage areas indicating as a minimum:
 - The battery type (and chemical name/s).
 - Who to contact (immediately) if a spill or leak is noticed.
 - MSDS sheets shall be displayed clearly where batteries are stored. Alternatively available on site.
- Whenever maintenance staff visit the site the site shall be inspected for:
 - Spills and leaks in/from battery storage areas – if any spills or leaks are found, they will be remediated, and repairs carried out to prevent recurrence.
 - Blockages in stormwater systems.
 - Litter, particularly litter in any stormwater channels, culvert, drains etc. – any litter found shall be removed.
 - New oil or fuel stains from vehicles – if stains are found, the owner of the vehicle with the leak shall be notified and instructed to facilitate remedial measures to the vehicle.
 - Full or faulty bunds and oil/water separators.
- Training courses shall be run annually for all employees that visit the site (or as needed for new employees) to inform them of the contents of this plan and how to inspect the site and who to inform if issues are noted;
- The following records shall be kept:
 - A register of spills
 - Incident Management records with the corrective actions taken after spills
 - Waste disposal records
 - Attendance registers for training courses.
 - An inventory of battery types (and associated chemicals) on the site
 - A record of all inspections.

Please contact the undersigned should you have any queries.

Yours faithfully,

SRK Consulting (South Africa) (Pty) Ltd

Prepared by

SRK Consulting - Certified Electronic Signature


533767/43568/Report
6731-6806-2998-DUPD-15/04/2019
This signature has been printed digitally. The Author has given permission for its use for this document. The details are stored in the SRK Signature Database

Daniell du Preez *B.Sc., M.Eng.*

Engineering Geologist

Project Partner

SRK Consulting - Certified Electronic Signature


533767/43568/Letter Report
6101-3769-6866-ENGE-15/04/2019
This signature has been printed digitally. The Author has given permission for its use for this document. The details are stored in the SRK Signature Database

Bruce Engelsman, *Pr. Eng., Pr. CPM*

Principal Engineer, Partner

Statement of SRK Independence

Neither SRK nor any of the authors of this Report have any material present or contingent interest in the outcome of this Report, nor do they have any pecuniary or other interest that could be reasonably regarded as being capable of affecting their independence or that of SRK.

SRK has no beneficial interest in the outcome of the assessment which is capable of affecting its independence.

Disclaimer

The opinions expressed in this report have been based on the information supplied to SRK by Eskom. SRK has exercised all due care in reviewing the supplied information, but conclusions from the review are reliant on the accuracy and completeness of the supplied data. SRK does not accept responsibility for any errors or omissions in the supplied information and does not accept any consequential liability arising from commercial decisions or actions resulting from them. Opinions presented in this report apply to the site conditions and features as they existed at the time of SRK's investigations, and those reasonably foreseeable. These opinions do not necessarily apply to conditions and features that may arise after the date of this Report, about which SRK had no prior knowledge nor had the opportunity to evaluate.

All data used as source material plus the text, tables, figures, and attachments of this document have been reviewed and prepared in accordance with generally accepted professional hydrogeological and environmental practices.

4 References

WR (2012). *Water Resources of South Africa*. Water Research Commission. Royal HaskoningDHV. Official WR2012 website launched in 2015. Website: <http://waterresourceswr2012.co.za/>

DWS (2016). *Development of Reconciliation Strategies for All Towns in the Southern Planning Region*. Darling. Swartland LM (WSA), West Coast DM, Western Cape Province.

SRK Report Distribution Record

Report No.

533767

Copy No.

Pdf Version

Name/Title	Company	Copy	Date	Authorised by
Madré Delpont	Eskom	1		
Xanthe Adams	SRK Consulting	2		
SRK Library	SRK Consulting	pdf		

Approval Signature:

This report is protected by copyright vested in SRK (SA) (Pty) Ltd. It may not be reproduced or transmitted in any form or by any means whatsoever to any person without the written permission of the copyright holder, SRK.